

# Agilent N6700 MPS Low-Profile Modular Power System

Models: N6700B, N6701A, N6702A, N6710B,  
N6711A, N6712A, N6731B-36B, N6741B-46B,  
N6751-54A, N6761A-62A, N6773A-76A

## Product Overview

**New!**  
Higher Power  
in Same Space

**Now  
Available—**  
300 Watt  
High-Performance  
DC Power Modules



- Ideal for ATE systems in R&D, Design Validation, and Manufacturing
- Small size: up to 4 outputs in 1U of rack space
- Flexible, modular system: Can mix and match power levels and performance levels to optimize investment
- Performance modules for critical test requirements
- Value modules for basic DC power requirements
- Fast command processing times to improve throughput
- Connect via GPIB, LAN, or USB
- Fully compliant to LXI Class C specification

**For Power  
Solutions  
in R&D –  
See back cover**

## Small Size and Flexibility for ATE

Power supplies are a fundamental component of every test system in industries including aerospace and defense, consumer electronics, computers and peripherals, communications, semiconductor and automotive electronics. Today's complex automatic test equipment (ATE) systems often require multiple power sources. Test system designers are challenged to keep costs down by reducing rack space occupied by these multiple power supplies and to continually increase test system throughput.

The Agilent N6700 Low-Profile Modular Power System (MPS) is a 1U (rack unit) high, multiple-output programmable DC power supply system that enables test system integrators to optimize performance, power and price to match test needs.

The Agilent N6700 MPS gives test system designers the flexibility to mix and match from 20 different DC power modules to create a 1- to 4-channel

## N6700 System Features

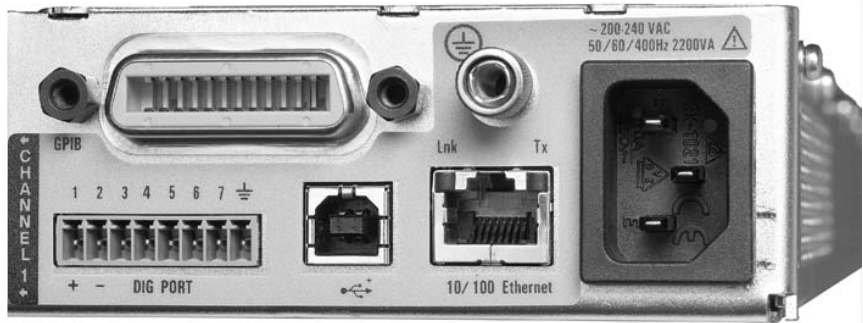


Figure 1. Connectivity: GPIB, 10/100 Base-T Ethernet, and USB 2.0 all standard

DC power system optimized to meet specific test requirements. Test system engineers can invest in high-performance outputs where speed and accuracy are needed, or purchase basic performance outputs for simple DC power requirements.

### Small Size

The Agilent N6700 MPS uses an advanced switching power supply design that fits within 1U of rack space. It has side air vents (no top or bottom air vents) so other instruments

can be mounted directly above or below it. (Requires rack mount kit; see Ordering Information.)

### Built-in Measurement of Voltage and Current

The N6700 modules come standard with built-in measurement of voltage and current to simplify wiring and design of an ATE system.

### Protection Features

Each N6700 module is protected against over-voltage, over-current, and over-temperature. A fault condition in one module can be detected within 10 microseconds by other modules so that they can be quickly shut down to avoid hazardous conditions on your DUT.

### Connectivity

The N6700 MPS comes standard with GPIB, USB 2.0, and 10/100 Base-T Ethernet LAN interfaces. While GPIB is best suited for use with existing systems, Agilent offers USB and LAN to allow you to take advantage of the availability, speed, and ease-of-use of common computer industry standard interfaces. The N6700 is fully compliant with the LXI Class C specification.

### Security

When used in systems running GPIB, the LAN and/or USB interfaces can be disabled for extra security. Also, all non-volatile RAM data and settings can be cleared from the front panel.

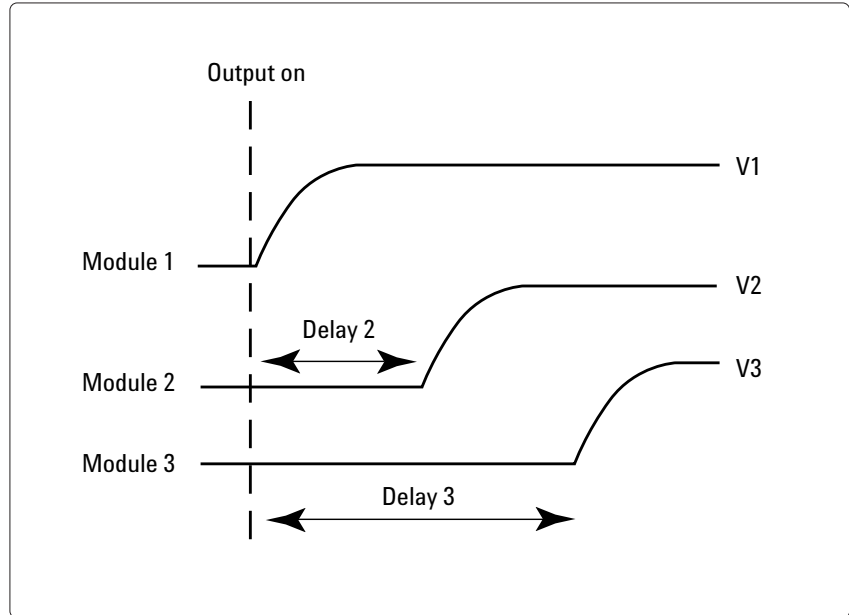


Figure 2. Output Sequencing

### Control from any Browser

The N6700 can be controlled via a standard web browser. The N6700 contains a web server that provides web pages for monitor, control, and setup of the MPS.

### Output Sequencing

Each DC power module can be individually set to turn on or to turn off with a delay. By adjusting the delay times and then commanding the N6700 to turn on, you can set the N6700 modules to sequence on in a particular order. The same sequencing capability is available to shut down the modules in a particular order.

For applications that require more than four DC power modules to be sequenced, this output sequencing can be extended across multiple N6700 mainframes. By wiring together the I/O ports on the rear panel of the mainframes, a pair of synchronization signals are sent between mainframes, allowing the output sequences of each mainframe to be synchronized. This capability is supported on N6700B, N6701A and N6702A mainframes. It is not supported on N6700A mainframes.

### **Programmable Voltage Slew**

For some applications, like inrush limiting or powering rate-sensitive devices, it is necessary to slow down and control the speed of the power supply to maintain a specific voltage slew rate. The N6700 provides programmable voltage slew rate, so that you can easily control the speed at which the output slews from one voltage to another. You can set the speed of a voltage change anywhere from its maximum up/down programming speed to its slowest change of up to 10 seconds. Programmable voltage slew is available from the front panel when operating the N6700 manually or via computer control.

### **Series Operation**

To increase available voltage and power, similarly rated outputs can be operated directly in series.

### **Easy Parallel Operation with Virtual Channels**

To increase available output power and current, identical outputs can be operated in parallel. To simplify parallel operation for applications requiring currents greater than any single output can provide, the N6700 offers virtual channels, a firmware-based feature that allows

the N6700 system to treat up to 4 channels as a single, synchronized channel. Once configured, all functions (sourcing, measurements, triggering, protection, and status monitoring) behave as if there is 1 channel of up to 4 times the capacity of a single channel, without writing a single line of code to manage the interaction and synchronization of the paralleled power supplies.

Virtual channel capability is available from the front panel when operating the N6700 manually or via computer control.

### **Power Management Feature Allows You Allocate Mainframe Power**

Often, a DUT requires a single high power DC source and several very low power DC sources. Since the DUT does not require full power to all outputs, you may choose to save money configuring a system where the sum of the power modules installed in a mainframe exceeds the total

power available from the mainframe. In this case, the new power management features of the N6700 allow you to allocate mainframe power to the outputs where it's needed, achieving maximum asset utilization and flexibility. This feature provides the safety from unexpected and dangerous shutdowns that can occur with power systems without power management when operated in a similar way.

For example, if your DUT requires 280 W on its main input, and 10 W each on three auxiliary inputs, you can configure a system consisting of one 300 W DC module and three 100 W DC modules. Even though the sum of the module power is 600 W, you can still use the N6700B 400 W MPS mainframe. Thanks to the power management feature, you can allocate the full 300 W to the 300 W module while you allocate only 33 W to each of the 100 W modules.

### **Plug High Power Mainframes into Standard AC Sockets without Dedicated High Current AC Circuits**

When you first turn on the N6702A 1200 W MPS mainframe, the mainframe automatically senses the power available from the AC line. If the AC line voltage is such that the resulting current would exceed a standard AC outlet rating, the mainframe automatically scales back the available output power to prevent overloading the AC line. The N6702A will limit the output power to 600 W allowing the high power mainframe to be plugged into any standard outlet. This is very convenient for initial bench checkout of the MPS system. It is also very convenient for test development, which is typically done on the bench when DUT is not yet driven to full power. You can also control this power reduction by manually allocating less than the full available mainframe power among the modules. As a result, the N6702A will draw less power (and less current) from the AC line.

### **Triggering**

The N6700 Low-Profile MPS mainframe has hardware trigger in/trigger out signals which permit the N6700 to be synchronized with external events. For example, a switch closure in the fixture can trigger the N6700 to apply voltage to the DUT or take a measurement.

### **Drivers**

The N6700 comes with both *VXIplug&play* drivers and IVI-COM drivers. LabView drivers are available at NI.COM.

### **Programming Language**

The N6700 supports SCPI (Standard Commands for Programmable Instruments).

### **Firmware Updates**

The N6700 firmware is stored in FLASH ROM and can be easily updated when new features become available. Firmware can be downloaded into the N6700 over GPIB, LAN, or USB using the supplied firmware update utility program. Firmware updates can be found at [www.agilent.com/find/N6700firmware](http://www.agilent.com/find/N6700firmware).

### **Output Disconnect and Polarity Reversal Relays**

Modules in the N6700 can be individually ordered with optional Output Disconnect Relays (option 761) or Output Disconnect/Polarity Reversal Relays (option 760). See table on page 25 for option 760 and 761 availability. All relays are built into the module, so no additional wiring or rack space is needed to get the relay function.

With option 761, Output Disconnect Relays, mechanical relays disconnect both the plus and minus side of the power supply, including the sense leads.

With option 760, Output Disconnect/Polarity Reversal Relays, mechanical relays switch the leads on both the plus and the minus side of the power supply, including the sense leads, resulting in a voltage polarity reversal at the DUT. In addition to polarity reversal, option 760 provides the same output disconnect function as option 761.

Note: Output current is limited on some modules when option 760 Output Disconnect/Polarity Reversal Relays is installed. See the “Available options” tables at the bottom of page 25 and page 27 for more information about maximum current limitations with option 760.



Figure 3. Front panel with up to 4 channels displayed simultaneously (Picture shows 3 channels installed.)

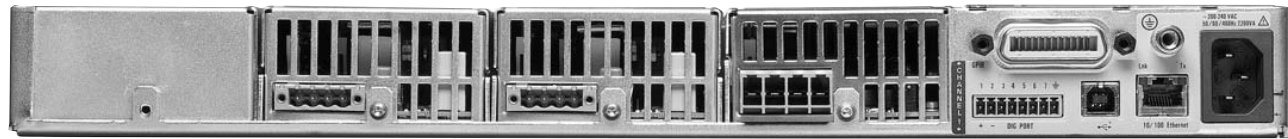


Figure 4. Rear panel (Picture shows 3 channels installed.)

**Front Panel**

In addition to full control over its three standard interfaces, the N6700 has a full featured front panel to permit easy manual operation for test prototyping, debugging, and troubleshooting when used in an ATE system. You can have confidence that the N6700 is working properly because you can view the settings and actual output values on all four outputs at the same time.

**Quieter Fans to Keep Noise Down**

To reduce acoustic noise, the N6700 mainframes employ fan speed control. When operating at less than full output power, the cooling fans spin slower and generate less noise.

**Universal AC Input**

The N6700 has a universal input that operates from 100-240 Vac, 50/60/400 Hz. There are no switches to set or fuses to change when switching from one voltage standard to another. The AC input employs power factor correction.

**Quick Disconnects**

Each power module has quick disconnects for easy system setup and maintenance.

**Rack Mount Kit**

The N6700 is easily rack-mounted using available option 908. This kit provides all the necessary hardware to rack mount one N6700 mainframe in only 1U of rack space. This rack mount kit includes front rack ears and rear supports which take the place of standard rack rails and/or slides. Note that standard rack rails or slides are not needed and are not compatible with the N6700 because of its 1U size and airflow requirements.



Figure 5. Quick disconnects for power and sense leads

## Choosing the right DC Power Modules to meet your ATE needs

See detailed specifications on page 13



### **N6750 Family**

*For applications where the power supply plays a critical role*

The Agilent N6750 family of high-performance, autoranging DC power modules provides low noise, high accuracy and programming speeds that are up to 10 to 50 times faster than other programmable power supplies. In addition, Agilent has, for the first time, included

high-speed test extensions in general-purpose power supplies. The high-speed test extensions offer an oscilloscope-like digitizer that simplifies system configuration and increases measurement accuracy when viewing high-speed transient or pulse events within the device-under-test (DUT). In addition, autoranging output capabilities enable one power supply to do the job of several traditional power supplies.



### **N6730/40/70 Family**

*For basic DC applications*

The Agilent N6730, N6740 and N6770 families of DC power modules provide programmable voltage and current, measurement and protection features at a very economical price, making these modules suitable to power the DUT or to provide power for ATE system resources, such as fixture control.



### **N6760 Family**

*For applications where precision is required*

The Agilent N6760 family of precision DC power modules provides precise control and measurements in the milli-ampere and microampere region with the ability to simultaneously digitize voltage and current, and capture those measurements in an oscilloscope-like data buffer.



**Figure 6a.** The N6753A and the N6754A 300 W high-performance autoranging DC power modules each occupy 2 module slots within the mainframe. All other modules occupy 1 module slot.



**Figure 6b.** User re-configurable modular system

## The N6750 and N6760 Families: Performance Modules for when the power supply is a critical part of your testing

When your testing requires a power supply to do more than just provide a constant DC level, the N6750 family of High-Performance, Autoranging DC Power Modules and the N6760 family of Precision DC Power Modules are the perfect fit. These modules combine a fast output with flexible controls and sophisticated measurements. The N6750/60 is more than a power supply; it is a stimulus/response instrument.

To fit in 1U, the N6750/60 use an advanced switch-mode design that offers the low output noise and fast output speed typically found on linear power supplies.

### Low Noise Outputs

Careful attention has been paid to this design to ensure low normal mode noise (ripple and peak-peak) as well as low common mode noise. This switching power supply outperforms most linear power supplies on the market.


### Output Programming Speed

When it comes to speed, the N6750/60 achieves performance unlike a typical DC power supply. Thanks to an active down-programming circuit to rapidly pull down the output when lowering the module's output voltage, the N6750/60 can rapidly program both up and down in voltage. Changing voltage from 0 V to 50 V, or 50 V to 0 V, can be accomplished in less than 1.5 milliseconds. And for smaller voltage changes, for example from 0 V to 5 V or 5 V to 0 V, the programming speed is less than 200 microseconds. These output speeds allow the N6750/60 to give maximum system throughput when your test calls for frequent changes in power supply voltage settings.

### Autoranging for Flexibility

The N6750/60 gives test system designers even more flexibility by providing autoranging outputs. This autoranging capability provides maximum output power at any output voltage up to 50 V. This allows one power supply to do the job of several power supplies because its operating range covers low voltage, high current as well as high voltage, low current operating points.

For example, the N6751A High-Performance, Autoranging DC Module, rated at 50 V, 5 A, and 50 W can provide full power at 10 V @ 5 A (=50 W), 20 V @ 2.5 A (= 50 W), 33.3 V @ 1.5 A (= 50 W), 50 V @ 1 A (= 50 W) or anywhere in between. Therefore, this 50 W autoranging power supply,

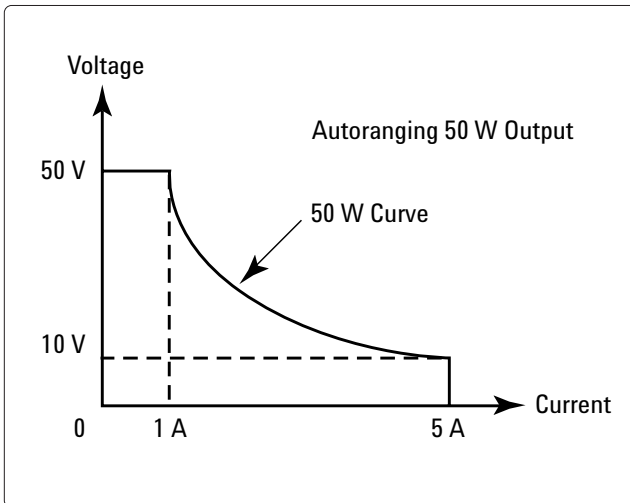



due to its extended voltage and current range, can produce voltage and current combinations in the range of a 250 W non-autoranging power supply.

The flexibility of autoranging is useful when the DUT operates over a wide range of voltages, when the ATE system needs to test a wide range of DUTs, or when margin is needed because the ATE power supply must be selected before final DUT power requirements are determined.

See page 22 for a diagram describing the details of the autoranging output characteristics of the N6750 and N6760 families of DC Power Modules.

### High-Speed Test Extensions

To make your testing go even faster, the N6750/60 offer High-Speed Test Extensions (HSTE). This enhancement to the N6750/60 DC Power Modules extends the capabilities to include features similar to a built-in arbitrary waveform generator and a built-in oscilloscope. HSTE is optional on the N6750 DC Power Modules. HSTE is standard on the N6760 DC Power Modules.

Through the LIST mode of HSTE, you can download up to 512 setpoints of voltage and current. In LIST mode, you can

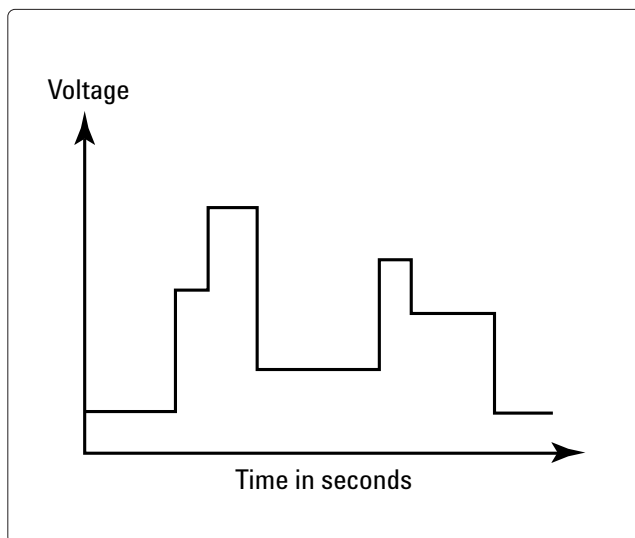


Figure 7. High Speed Test Extensions LIST mode provides “power ARB” capability

program the output to execute a LIST of voltage and current setpoints. For each setpoint, a dwell time can be specified and the power supply will stay (i.e., dwell) at that setpoint for the programmed dwell time value. For each setpoint in the LIST, you can have a different dwell time from 0 to 262 seconds with 1 microsecond resolution.\* Then, you can trigger the module to begin executing the list. The module will step thru the list, staying at each setpoint for the programmed dwell time, and then it will move on to the next point. This speeds up execution by removing the computer I/O from the process.

The result is an output that automatically changes according to the programmed list, just like an arbitrary waveform generator.

*\* Note that the output response time is less than 5 milliseconds per voltage change, so steps of less than 5 milliseconds will not achieve their final output voltage value before moving on to the next step. This is useful when trying to create a smooth waveform.*

HSTE also provides an oscilloscope-like digitizer built into the power module to capture voltage and current measurements of up to 4096 points at up to 50,000 measurements per second.

For applications such as design validation of battery powered digital devices, the ability to capture dynamic information about the current flowing into the DUT allows designers to better understand the current drain on DUT batteries and optimize DUT power management during normal DUT operation and in DUT standby mode.

The digitizer can also be synchronized with changes in the output. For example, the digitizer can make measurements in response to a trigger generated by a change in output voltage caused by LIST mode. In this configuration, you can ensure that measurements are made at the right moment during each step of an executing



LIST. This is particularly useful if you are trying to measure current consumption during a rapidly changing voltage stimulus, such as current drawn during a pulsed output voltage.

#### **Precision Low-level Performance**

The N6760 family of Precision DC Power Modules additionally provide dual ranges on both programming and measurement. In the low range, these

power supplies provide precision in the milliampere and microampere regions. They are ideally suited for semiconductor and passive device testing, or where a precisely controlled output and highly accurate, precise measurements are needed during test.

## If you are using Agilent Multiple-Output System DC Power Supplies Now

### Models

6621A, 6622A, 6623A,

6624A, 6625A, 6626A,

6627A, 6628A, 6629A

If you would like to take advantage of the size and speed of the N6700, and need assistance in converting from Agilent 662x to the N6700, please refer to “Application Note 1467 – How to use the Agilent N6700 Series Modular Power System to replace an Agilent 662xA”. Look for literature part number 5989-0466EN at [www.agilent.com/find/N6700](http://www.agilent.com/find/N6700)

## The N6730, N6740 and N6770 Families: Basic Modules when you just need a simple power supply

Not all applications require high performance power supplies. When your budget is tight, and when speed and accuracy are a low consideration, the Agilent N6700 Low-Profile MPS supports basic DC power modules that provide an economical solution. The N6730, N6740 and N6770 families give you clean, reliable DC power without advanced features.

The Agilent N6730 family of 50 W DC Power Modules, the N6740 family of 100 W DC Power Modules, and the N6770 family of 300 W DC Power Modules provide the following:

- Fully programmable Constant Voltage/Constant Current DC Source
  - Remote sensing for accurate control of output voltage when voltage drops in the leads are present
  - Built-in measurements of voltage and current
  - Protection (over-voltage over-current, and over-temperature) against damage to your DUT or to the power module
- Performance (programming accuracy, measurement accuracy, noise) suitable for most common DC power applications
  - Built-in optional output disconnect and polarity reversal relays, which break both the power and the sense leads, to simplify system wiring

### Use the N6730/40/70 in Place of Fixed-output DC Power Supplies

Many ATE systems have complex fixtures that contain indicator lights, relays or active circuits (like sensors, triggers, amplifiers) to facilitate testing of the DUT. These circuits need DC power, too. One solution for powering these ATE system resources would be to purchase a fixed-output DC source. However, there are considerations when integrating a fixed output DC source into an ATE system.

The table to the right illustrates these points and how it may be easier, faster, and more economical to purchase an N6730/40/70 programmable DC Power Module in place of a fixed-output DC Power Supply.

**All the benefits of the N6700 MPS at a low price**

While the N6730/40/70 are economical solutions to basic DC power requirements, they are also part of the N6700 MPS. Therefore, while saving, you still have the benefits of:

- Small size (true 1U)
- Mix-and-match with other N6700 DC Power Modules when you need performance along with basic DC outputs
- Connectivity via LAN, USB, and GPIB
- Fast command processing time of less than 1 ms
- Remote control over internet via standard web browser
- Friendly front panel
- Optional output disconnect and polarity reversal relays

<b>Factor</b>	<b>Consideration When Using a Fixed-Output DC Power Supply</b>	<b>Solution Using N6730/40/70 DC Power Modules in N6700 MPS</b>
<b>Control the output</b>	You may want some limited control over this DC source (on/off).	The N6730/40/70 is fully controllable over LAN, USB, GPIB
<b>Monitor the output</b>	You may want to be able to monitor the voltage or current to ensure proper operation, which would require wiring to a system DMM.	The N6730/40/70 has built-in measurements of voltage and current, eliminating the need for wiring to a system DMM.
<b>Mounting the power supply</b>	You will need to mount the power supply in the ATE system. Finding a safe location can be a challenge. Some system designers will build a “drawer” or “tray” for holding power supplies. However, this adds extra design time, fabrication costs, installation costs, and occupies rack space.	The N6730/40/70 are compact modules integrated into a 1U rack mountable mainframe. There is no need to design or build any custom mounting hardware.
<b>Safety</b>	You may want to provide a safety interlock to this DC source. This would require control (on/off) and a means to detect the interlock condition.	The N6730/40/70 have hardware inputs for remote on/off that can be directly connected to a safety interlock system.

## Agilent N6751A/N6752A, N6753A, N6754A and N6761A/N6762A Performance Specifications

Unless otherwise noted, specifications are warranted over the ambient temperature range of 0 to 55°C after a 30-minute warm-up period, with each module's sense terminals externally jumpered directly to their respective output terminals (local sensing).

		N6751A / N6752A	N6753A	N6754A	N6761A / N6762A
<b>DC Output Ratings</b>					
	Voltage	50 V	20 V	60 V	50 V
	Current (derated 1% per °C above 40°C)	5 A / 10 A	50 A	20 A	1.5 A / 3 A
	Power	50 W / 100 W	300 W	300 W	50 W / 100 W
<b>Output Ripple and Noise (PARD)</b> (from 20 Hz – 20 MHz)					
	CV peak-to-peak	4.5 mV	5 mV	6 mV	4.5 mV
	CV rms	350 µV	1 mV	1 mV	350 µV
<b>Load Effect (Regulation)</b> (for any output load change, with a maximum load-lead drop of 1 V per lead)					
	Voltage	2 mV	2 mV	2 mV	0.5 mV
	Current (@ 0 - 7 V)	2 mA	12 mA	5 mA	30 µA
	(@ 0 - 50 V)	2 mA	12 mA	5 mA	65 µA
<b>Source Effect (Regulation)</b>					
	Voltage	1 mV	0.5 mV	1.2 mV	0.5 mV
	Current	1 mA	5 mA	2 mA	30 µA
<b>Programming Accuracy</b> (at 23°C ±5°C after 30 minute warm-up. Applies from min. to max. programming range)					
	Voltage high range	0.06% + 19 mV	0.06% + 10 mV	0.06% + 25 mV	0.016% + 6 mV
	Voltage low range (≤ 5.5 V)	N/A	N/A	N/A	0.016% + 1.5 mV
	Current high range	0.1% + 20 mA	0.10% + 30 mA	0.10% + 8 mA	0.04% + 200 µA
	Current low range (≤ 100 mA, @ 0 - 7 V)	N/A	N/A	N/A	0.04% + 15 µA
	(≤ 100 mA, @ 0 - 50 V)	N/A	N/A	N/A	0.04% + 55 µA
<b>Measurement Accuracy</b> (at 23°C ±5°C)					
	Voltage high range	0.05% + 20 mV	0.05% + 10 mV	0.05% + 25 mV	0.016% + 6 mV
	Voltage low range (≤ 5.5 V)	N/A	N/A	N/A	0.016% + 1.5 mV
	Current high range	0.1% + 4 mA	0.10% + 30 mA	0.10% + 8 mA	0.04% + 160 µA
	Current low range (≤ 100 mA, @ 0 - 7 V) <sup>NOTE 1</sup>	N/A	N/A	N/A	0.03% + 15 µA <sup>NOTE 2</sup>
	(≤ 100 mA, @ 0 - 50 V)	N/A	N/A	N/A	0.03% + 55 µA
<b>Load Transient Recovery Time</b> (time to recover to within the settling band following a load change)					
<ul style="list-style-type: none"> <li>• from 60% to 100% and from 100% to 60% of full load for models N6751A &amp; N6761A</li> <li>• from 50% to 100% and from 100% to 50% of full load for models N6752A-N6754A &amp; N6762A.</li> </ul>					
	Voltage settling band	± 75 mV <sup>NOTE 2</sup>	± 30 mV	± 90 mV <sup>NOTE 3</sup>	± 75 mV
	Time	< 100 µs	< 100 µs	< 100 µs	< 100 µs

<sup>1</sup> Applies when measuring 4096 data points (SENSe:SWEep:POINts = 4096).

<sup>2</sup> Settling band is ±125 mV for Model N6752A when relay option 761 is installed.

<sup>3</sup> Settling band is ±350 mV for Model N6754A when relay option 760 or 761 is installed.

## Agilent N6751A/N6752A, N6753A, N6754A and N6761A/N6762A Supplemental Characteristics

Supplemental characteristics are not warranted but are descriptions of performance determined either by design or type testing.

All supplemental characteristics are typical unless otherwise noted.

		<b>N6751A / N6752A</b>	<b>N6753A</b>	<b>N6754A</b>	<b>N6761A / N6762A</b>
<b>Programming Ranges</b>					
	Voltage high range	20 mV – 51 V	10 mV – 24.48 V	25 mV – 61.2 V	15 mV – 51 V
	Voltage low range ( $\leq 5.5$ V)	N/A	N/A	N/A	12 mV – 5.5 V
	Current high range	10 mA – 5.1 A/ 10 mA – 10.2 A	50 mA – 51 A	20 mA – 20.4 A	1 mA – 1.53 A/ 1 mA – 3.06 A
	Current low range ( $\leq 0.1$ A)	N/A	N/A	N/A	0.1 mA – 0.1 A <sup>NOTE 1</sup>
<b>Programming Resolution</b>					
	Voltage high range	3.5 mV <sup>NOTE 2</sup>	1.5 mV <sup>NOTE 2</sup>	4.2 mV <sup>NOTE 2</sup>	880 $\mu$ V <sup>NOTE 3</sup>
	Voltage low range ( $\leq 5.5$ V)	N/A	N/A	N/A	90 $\mu$ V
	Current high range	3.25 mA <sup>NOTE 4</sup>	16.3 mA <sup>NOTE 4</sup>	6.5 mA <sup>NOTE 4</sup>	60 $\mu$ A
	Current low range ( $\leq 0.1$ A)	N/A	N/A	N/A	2 $\mu$ A
<b>Measurement Resolution</b>					
	Voltage high range	1.8 mV <sup>NOTE 5</sup>	0.8 mV <sup>NOTE 5</sup>	2.2 mV <sup>NOTE 5</sup>	440 $\mu$ V <sup>NOTE 6</sup>
	Voltage low range ( $\leq 5.5$ V)	N/A	N/A	N/A	44 $\mu$ V
	Current high range	410 $\mu$ A	2.05 mA	820 $\mu$ A	30 $\mu$ A
	Current low range ( $\leq 0.1$ A)	N/A	N/A	N/A	1 $\mu$ A
<b>Programming Temperature Coefficient per °C</b>					
	Voltage high range	18 ppm + 160 $\mu$ V	20 ppm + 20 $\mu$ V	20 ppm + 50 $\mu$ V	18 ppm + 140 $\mu$ V
	Voltage low range ( $\leq 5.5$ V)	N/A	N/A	N/A	40 ppm + 70 $\mu$ V
	Current high range	100 ppm + 45 $\mu$ A	60 ppm + 500 $\mu$ A	60 ppm + 200 $\mu$ A	33 ppm + 10 $\mu$ A
	Current low range ( $\leq 0.1$ A)	N/A	N/A	N/A	60 ppm + 1.5 $\mu$ A
<b>Measurement Temperature Coefficient per °C</b>					
	Voltage high range	25 ppm + 35 $\mu$ V	20 ppm + 20 $\mu$ V	20 ppm + 50 $\mu$ V	23 ppm + 40 $\mu$ V
	Voltage low range ( $\leq 5.5$ V)	N/A	N/A	N/A	30 ppm + 40 $\mu$ V
	Current high range	60 ppm + 3 $\mu$ A	60 ppm + 30 $\mu$ A	60 ppm + 12 $\mu$ A	40 ppm + 0.3 $\mu$ A
	Current low range ( $\leq 0.1$ A)	N/A	N/A	N/A	50 ppm + 0.3 $\mu$ A
<b>Output Ripple and Noise (PARD)</b>					
	CC rms	2 mA	10 mA	4 mA	2 mA
<b>Common Mode Noise</b> (from 20 Hz – 20 MHz; from either output to chassis)					
	rms	500 $\mu$ A	500 $\mu$ A	750 $\mu$ A	500 $\mu$ A
	peak-to-peak	< 2 mA	2 mA	3 mA	< 2 mA
<b>Over-voltage Protection</b>					
	Accuracy	0.25% + 250 mV	0.25% $\pm$ 150 mV	0.25% $\pm$ 300 mV	0.25% + 250 mV
	Maximum setting	55 V	22 V	66 V	55 V
	Response time	50 $\mu$ s from occurrence of over-voltage condition to start of output shutdown			

<sup>1</sup> If you are operating the unit below 255  $\mu$ A in constant current mode, the output may become unregulated with the following load conditions:  
The load resistance is <175 m $\Omega$  and the load inductance is >20  $\mu$ H. If this occurs, an UNRegulated flag will be generated and the output current may rise above the programmed value but will remain less than 255  $\mu$ A.

<sup>2</sup> Based on 14-bit DAC, with DAC range adjusted by software calibration

<sup>3</sup> Based on 16-bit DAC, with DAC range adjusted by software calibration

<sup>4</sup> Based on 12-bit DAC, with DAC range adjusted by software calibration

<sup>5</sup> Based on 16-bit ADC (15 bits plus sign), with ADC range adjusted by software calibration

<sup>6</sup> Based on 18-bit ADC (17 bits plus sign), with ADC range adjusted by software calibration

**Agilent N6751A/N6752A, N6753A, N6754A and N6761A/N6762A Supplemental Characteristics**  
(Continued)

		<b>N6751A / N6752A</b>	<b>N6753A</b>	<b>N6754A</b>	<b>N6761A / N6762A</b>
<b>Maximum Up-programming Time with full resistive load</b>					
(time from 10% to 90% of total voltage excursion)	For voltage change of Up-programming time	0 to 10 V 0.2 ms	0 to 6 V 0.3 ms	0 to 15 V 0.3 ms	0 to 10 V 0.6 ms
	For voltage change of Up-programming time	0 to 50 V 1.5 ms	0 to 20 V 1.5 ms	0 to 60 V 2.0 ms	0 to 50 V 2.2 ms
<b>Maximum Up-programming Settling Time with full resistive load</b>					
(time from start of voltage change to within 50 mV of final value)	For voltage change of Up-programming settling time	0 to 10 V 0.5 ms	0 to 6 V 2.0 ms	0 to 15 V 2.0 ms	0 to 10 V 0.9 ms
	For voltage change of Up-programming settling time	0 to 50 V 4.0 ms	0 to 20 V 3.0 ms	0 to 60 V 4.0 ms	0 to 50 V 4.0 ms
<b>Maximum Down-programming Time with no load</b>					
(time from start of voltage change to output voltage < 0.5 V)	For voltage change of Down-programming time	10 to 0 V 0.3 ms	6 to 0 V 0.5 ms	15 to 0 V 0.6 ms	10 to 0 V 0.3 ms
	For voltage change of Down-programming time	50 to 0 V 1.3 ms	20 to 0 V 1.6 ms	60 to 0 V 2.0 ms	50 to 0 V 1.3 ms
<b>Maximum Down-programming Settling Time with no load</b>					
(time from start of voltage change to output voltage within 50 mV of final value)	For voltage change of Down-programming settling time	10 to 0 V 0.45 ms	6 to 0 V 0.7 ms	15 to 0 V 0.7 ms	10 to 0 V 0.45 ms
	For voltage change of Down-programming settling time	50 to 0 V 1.4 ms	20 to 0 V 3.0 ms	60 to 0 V 3.0 ms	50 to 0 V 1.4 ms
<b>Down-programming Time with capacitive load</b> <sup>NOTE 1</sup>					
(time from start of voltage change to output voltage < 0.5 V)	Capacitive load	1000 $\mu$ F <sup>NOTE 1</sup>	4700 $\mu$ F <sup>NOTE 2</sup>	680 $\mu$ F <sup>NOTE 3</sup>	1000 $\mu$ F <sup>NOTE 1</sup>
	For voltage change of Down-programming time	10 to 0 V 0.3 ms	6 to 0 V 0.5 ms	15 to 0 V 0.6 ms	10 to 0 V 0.3 ms
	For voltage change of Down-programming time	50 to 0 V 1.3 ms	20 to 0 V 1.6 ms	60 to 0 V 2.0 ms	50 to 0 V 1.3 ms
<b>Down-programming Capability</b>					
	Continuous power	7 W	12.5 W	12.5 W	7 W
	Peak current	7 A	15 A	6 A	3.8 A
<b>Remote Sense Capability</b>					
Outputs can maintain specifications with up to a 1-volt drop per load lead.					
<b>Series and Parallel Operation</b>					
Identically rated outputs can be operated directly in parallel or can be connected for straight series operation. Auto-series and auto-parallel operation is not available.					

<sup>1</sup> Modules can discharge a 1000  $\mu$ F capacitor from 50 V to 0 V at a rate of 4 times/second.

<sup>2</sup> Modules can discharge a 4700  $\mu$ F capacitor from 20 V to 0 V at a rate of 4 times/second.

<sup>3</sup> Modules can discharge a 680  $\mu$ F capacitor from 60 V to 0 V at a rate of 4 times/second.

## Agilent N6731B - N6736B and N6741B - N6746B Performance Specifications

Unless otherwise noted, specifications are warranted over the ambient temperature range of 0 to 55°C after a 30-minute warm-up period, with each module's sense terminals externally jumpered directly to their respective output terminals (local sensing)

		<b>N6731B/ N6741B</b>	<b>N6732B/ N6742B</b>	<b>N6733B/ N6743B</b>	<b>N6734B/ N6744B</b>	<b>N6735B/ N6745B</b>	<b>N6736B/ N6746B</b>
<b>DC Output Ratings:</b>							
	Voltage	5 V	8 V	20 V	35 V	60 V	100 V
	Current <sup>NOTE 1</sup>	10 A / 20 A	6.25 A / 12.5 A <sup>NOTE 3</sup>	2.5 A / 5 A	1.5 A / 3 A	0.8 A / 1.6 A	0.5 A / 1 A
	Power	50 W / 100 W	50 W / 100 W	50 W / 100 W	52.5 W / 105 W	50 W / 100 W	50 W / 100 W
<b>Output Ripple and Noise (PARD)</b> (from 20 Hz – 20 MHz)							
	CV peak-to-peak	10 mV / 11 mV	12 mV	14 mV	15 mV	25 mV	30 mV
	CV rms	2 mV	2 mV	3 mV	5 mV	9 mV	18 mV
<b>Load Effect (Regulation)</b> (with output change from no load to full load, up to a maximum load-lead drop of 1 V/lead)							
	Voltage	5 mV	6 mV	9 mV	11 mV	13 mV / 16 mV	20 mV / 30 mV
	Current	2 mA	2 mA	2 mA	2 mA	2 mA	2 mA
<b>Source Effect (Regulation)</b>							
	Voltage	1 mV	2 mV	2 mV	4 mV	6 mV	10 mV
	Current	1 mA	1 mA	1 mA	1 mA	1 mA	1 mA
<b>Programming Accuracy</b> (@ 23 °C ±5°C after 30 minute warm-up. Applies from minimum to maximum programming range)							
	Voltage	0.1% + 19 mV	0.1% + 19 mV	0.1% + 20 mV	0.1% + 35 mV	0.1% + 60 mV	0.1% + 100 mV
	Current	0.15% + 20 mA	0.15% + 20 mA	0.15% + 20 mA	0.15% + 20 mA	0.15% + 20 mA	0.15% + 10 mA
<b>Measurement Accuracy</b> (at 23°C ±5°C)							
	Voltage	0.1% + 20 mV	0.1% + 20 mV	0.1% + 20 mV	0.1% + 35 mV	0.1% + 60 mV	0.1% + 100 mV
	Current	0.15% + 20 mA	0.15% + 10 mA	0.15% + 5 mA	0.15% + 4 mA	0.15% + 4 mA	0.15% + 2 mA
<b>Load Transient Recovery Time</b> (time to recover to within the settling band following a load change from 50% to 100% and from 100% to 50% of full load.)							
	Voltage settling band	±0.08 V / 0.1 V <sup>NOTE 2</sup>	±0.08 V / 0.1 V <sup>NOTE 2</sup>	± 0.2 V / 0.3 V	± 0.2 V / 0.3 V	± 0.4 V / 0.5 V	± 0.5 V / 1.0 V
	Time	< 200 μs	< 200 μs	< 200 μs	< 200 μs	< 200 μs	< 200 μs

<sup>1</sup> Output current is derated 1% per °C above 40°C.

<sup>2</sup> Settling band is ±0.10 V/0.125 V for 5 V and 8 V Models when relay options 760 and 761 are installed.

<sup>3</sup> For N6742B, output current is limited to 10 A when option 760 Output Disconnect/Polarity Reversal Relays is installed.



## Agilent N6731B - N6736B and N6741B - N6746B Supplemental Characteristics

Supplemental characteristics are not warranted but are descriptions of performance determined either by design or type testing.  
All supplemental characteristics are typical unless otherwise noted.

		<b>N6731B/ N6741B</b>	<b>N6732B/ N6742B</b>	<b>N6733B/ N6743B</b>	<b>N6734B/ N6744B</b>	<b>N6735B/ N6745B</b>	<b>N6736B/ N6746B</b>
<b>Programming Ranges</b>							
	Voltage	15 mV – 5.1 V	15 mV – 8.16 V	30 mV – 20.4 V	40 mV – 35.7 V	70 mV – 61.2 V	100 mV – 102 V
	Current	60 mA – 10.2 A/ 60 mA – 20.4 A	40 mA – 6.375 A/ 40 mA – 12.75 A	10 mA – 2.55 A/ 10 mA – 5.1 A	5 mA – 1.53 A/ 5 mA – 3.06 A	2.5 mA – 0.85 A/ 2.5 mA – 1.7 A	1.5 mA – 0.51 A/ 1.5 mA – 1.02 A
<b>Programming Resolution</b> <sup>NOTE 1</sup>							
	Voltage	3.5 mV	4 mV	7 mV	10 mV	18 mV	28 mV
	Current	7 mA	4 mA	3 mA	2 mA	1 mA	0.5 mA
<b>Measurement Resolution</b> <sup>NOTE 2</sup>							
	Voltage	3 mV	4 mV	10 mV	18 mV	30 mV	50 mV
	Current	10 mA	7 mA	3 mA	2 mA	1 mA	0.5 mA
<b>Programming Temperature Coefficient per °C</b>							
	Voltage	0.005% + 0.1 mV	0.005% + 0.1 mV	0.005% + 0.2 mV	0.005% + 0.5 mV	0.005% + 0.5 mV	0.005% + 1 mV
	Current	0.005% + 1 mA	0.005% + 0.5 mA	0.005% + 0.1 mA	0.005% + 0.05 mA	0.005% + 0.02 mA	0.005% + 0.02 mA
<b>Measurement Temperature Coefficient per °C</b>							
	Voltage	0.01% + 0.1 mV	0.01% + 0.1 mV	0.01% + 0.2 mV	0.01% + 0.2 mV	0.01% + 0.5 mV	0.01% + 0.5 mV
	Current	0.01% + 1 mA	0.01% + 0.5 mA	0.01% + 0.1 mA	0.01% + 0.05 mA	0.01% + 0.02 mA	0.01% + 0.02 mA
<b>Output Ripple and Noise (PARD)</b>							
	CC rms	8 mA	4 mA	2 mA	2 mA	2 mA	2 mA
<b>Common Mode Noise</b> (from 20 Hz – 20 MHz; from either output to chassis)							
	rms	1 mA	1 mA	1 mA	1 mA	1 mA	1 mA
	peak-to-peak	< 15 mA	< 10 mA	< 10 mA	< 10 mA	< 10 mA	< 10 mA
<b>Over-voltage Protection</b>							
	Accuracy	0.25% + 50 mV	0.25% + 50 mV	0.25% + 75 mV	0.25% + 100 mV	0.25% + 200 mV	0.25% + 250 mV
	Accuracy w/opt 760	0.25% + 600 mV	0.25% + 600 mV	0.25% + 350 mV	0.25% + 250 mV	0.25% + 300 mV	0.25% + 300 mV
	Accuracy w/opt 761	0.25% + 600 mV	0.25% + 600 mV	0.25% + 350 mV	0.25% + 250 mV	0.25% + 300 mV	0.25% + 300 mV
	Maximum setting	7.5 V	10 V	22 V	38.5 V	66 V	110 V
	Response time	50 µs from occurrence of over-voltage condition to start of output shutdown					
<b>Maximum Up-programming and Down-programming Time with full resistive load</b> (time from 10% to 90% of total voltage excursion)							
	Voltage setting from 0 V to full scale and full scale to 0 V	20 ms	20 ms	20 ms	20 ms	20 ms	20 ms
<b>Maximum Up-programming and Down-programming Settling Time with full resistive load</b> (time from start of voltage change until voltage settles within 0.1% of the full-scale voltage of its final value)							
	Voltage setting from 0 V to full scale and full scale to 0 V	100 ms	100 ms	100 ms	100 ms	100 ms	100 ms
<b>Remote Sense Capability</b>							
		Outputs can maintain specifications with up to a 1-volt drop per load lead.					
<b>Series and Parallel Operation</b>							
		Identically rated outputs can be operated directly in parallel or can be connected for straight series operation. Auto-series and auto-parallel operation is not available.					

<sup>1</sup> Based on 12-bit DAC, with DAC range adjusted by software calibration

<sup>2</sup> Based on 12-bit ADC (11 bits plus sign), with ADC range adjusted by software calibration

## Agilent N6773A - N6776A Performance Specifications

Unless otherwise noted, specifications are warranted over the ambient temperature range of 0 to 55°C after a 30-minute warm-up period, with each module's sense terminals externally jumpered directly to their respective output terminals (local sensing).

		N6773A	N6774A	N6775A	N6776A
<b>DC Output Ratings</b>					
	Voltage	20 V	35 V	60 V	100 V
	Current <sup>NOTE 1</sup>	15 A <sup>NOTE 3</sup>	8.5 A	5 A	3 A
	Power	300 W	300 W	300 W	300 W
<b>Output Ripple and Noise (PARD)</b> (from 20 Hz – 20 MHz)					
	CV peak-to-peak	20 mV	22 mV	35 mV	45 mV
	CV rms	3 mV	5 mV	9 mV	18 mV
<b>Load Effect (Regulation)</b> (with output change from no load to full load, up to a maximum load-lead drop of 1 V/lead)					
	Voltage	13 mV	16 mV	24 mV	45 mV
	Current	6 mA	6 mA	6 mA	6 mA
<b>Source Effect (Regulation)</b>					
	Voltage	2 mV	4 mV	6 mV	10 mV
	Current	1 mA	1 mA	1 mA	1 mA
<b>Programming Accuracy:</b> (@ 23°C ±5°C after 30 minute warm-up. Applies from minimum to maximum programming range)					
	Voltage	0.1% + 20 mV	0.1% + 35 mV	0.1% + 60 mV	0.1% + 100 mV
	Current	0.15% + 60 mA	0.15% + 60 mA	0.15% + 60 mA	0.15% + 30 mA
<b>Measurement Accuracy</b> (at 23°C ±5°C)					
	Voltage	0.1% + 20 mV	0.1% + 35 mV	0.1% + 60 mV	0.1% + 100 mV
	Current	0.15% + 15 mA	0.15% + 12 mA	0.15% + 12 mA	0.15% + 6 mA
<b>Load Transient Recovery Time</b> (time to recover to within the settling band following a load change from 50% to 100% and from 100% to 50% of full load.)					
	Voltage settling band	± 0.3 V <sup>NOTE 2</sup>	± 0.3 V <sup>NOTE 2</sup>	± 0.5 V	± 1.0 V
	Time	< 250 μs	< 250 μs	< 250 μs	< 250 μs

<sup>1</sup> Output current is derated 1% per °C above 40°C.

<sup>2</sup> Settling band is ±0.35 V for 20 V and 35 V Models when relay options 760 and 761 are installed.

<sup>3</sup> For N6773A, output current is limited to 10 A when option 760 Output Disconnect/Polarity Reversal Relays is installed.

## Agilent N6773A - N6776A Supplemental Characteristics

Supplemental characteristics are not warranted but are descriptions of performance determined either by design or type testing.

All supplemental characteristics are typical unless otherwise noted

		N6773A	N6774A	N6775A	N6776A
<b>Programming Ranges</b>					
	Voltage	30 mV – 20.4 V	40 mV – 35.7 V	70 mV – 61.2 V	100 mV – 102 V
	Current	30 mA – 15.3 A	15 mA – 8.67 A	7.5 mA – 5.1 A	4.5 mA – 3.06 A
<b>Programming Resolution</b> <sup>NOTE 1</sup>					
	Voltage	7 mV	10 mV	18 mV	28 mV
	Current	9 mA	6 mA	3 mA	1.5 mA
<b>Measurement Resolution</b> <sup>NOTE 2</sup>					
	Voltage	10 mV	18 mV	30 mV	50 mV
	Current	9 mA	6 mA	3 mA	1.5 mA
<b>Programming Temperature Coefficient per °C</b>					
	Voltage	0.01% + 0.2 mV	0.01% + 0.5 mV	0.01% + 0.5 mV	0.01% + 1 mV
	Current	0.01% + 0.5 mA	0.01% + 0.5 mA	0.01% + 0.1 mA	0.01% + 0.1 mA
<b>Measurement Temperature Coefficient per °C</b>					
	Voltage	0.01% + 0.2 mV	0.01% + 0.2 mV	0.01% + 0.5 mV	0.01% + 0.5 mV
	Current	0.01% + 0.5 mA	0.01% + 0.5 mA	0.01% + 0.05 mA	0.01% + 0.05 mA
<b>Output Ripple and Noise (PARD)</b>					
	CC rms	6 mA	6 mA	6 mA	6 mA
<b>Common Mode Noise</b> (from 20 Hz – 20 MHz; from either output to chassis)					
	Rms	2 mA	2 mA	2 mA	2 mA
	Peak-to-peak	< 20 mA	< 20 mA	< 20 mA	< 20 mA
<b>Over-voltage Protection</b>					
	Accuracy	0.25% + 100 mV	0.25% + 130 mV	0.25% + 260 mV	0.25% + 650 mV
	Accuracy w/opt 760	0.25% + 700 mV	0.25% + 700 mV	0.25% + 400 mV	0.25% + 650 mV
	Accuracy w/opt 761	0.25% + 500 mV	0.25% + 350 mV	0.25% + 350 mV	0.25% + 650 mV
	Maximum setting	22 V	38.5 V	66 V	110 V
	Response time	50 µs from occurrence of over-voltage condition to start of output shutdown			
<b>Maximum Up-programming and Down-programming Time with full resistive load</b> (time from 10% to 90% of total voltage excursion)					
	Voltage setting from 0 V to full scale and full scale to 0 V	20 ms	20 ms	20 ms	20 ms
<b>Maximum Up-programming and Down-programming Settling Time with full resistive load</b> (time from start of voltage change until voltage settles within 0.1% of the full-scale voltage of its final value)					
	Voltage setting from 0 V to full scale and full scale to 0 V	100 ms	100 ms	100 ms	100 ms
<b>Remote Sense Capability</b>					
	Outputs can maintain specifications with up to a 1-volt drop per load lead.				
<b>Series and Parallel Operation</b>					
	Identically rated outputs can be operated directly in parallel or can be connected for straight series operation. Auto-series and auto-parallel operation is not available.				

<sup>1</sup> Based on 12-bit DAC, with DAC range adjusted by software calibration

<sup>2</sup> Based on 12-bit ADC (11 bits plus sign), with ADC range adjusted by software calibration

## Agilent N6700B, N6701A, N6702A MPS Mainframes

### N6700B, N6701A, N6702A

<b>Maximum Total Output Power</b> (= Sum of Total Module Output Power)	N6700B	400 W	when operating from 100 – 240 VAC input
	N6701A	600 W	when operating from 100 – 240 VAC input
	N6702A	1200 W	when operating from 200 – 240 VAC input
		600 W	when operating from 100 – 120 VAC input
<b>Command Processing Time</b>			
	From receipt of command to start of the output change	≤ 1 ms	
<b>Protection Response Characteristics</b>			
	INH input	5 μs	from receipt of inhibit to start of shutdown
	Fault on coupled outputs	< 10 μs	(from receipt of fault to start of shutdown)
<b>Digital Control Characteristics</b>			
	Maximum voltage ratings	16.5 VDC/- 5 VDC between pins (pin 8 is internally connected to chassis ground).	
	Pins 1 and 2 as FLT output	Maximum low-level output voltage = 0.5 V @ 4 mA Maximum low-level sink current = 4 mA Typical high-level leakage current = 0.14 mA @ 16.5 VDC	
	Pins 1 - 7 as digital/trigger outputs (pin 8 = common)	Maximum low-level output voltage = 0.5 V @ 4 mA; 1 V @ 50 mA; 1.75 V @ 100 mA Maximum low-level sink current = 100 mA Typical high-level leakage current = 0.12 mA @ 16.5 VDC	
	Pins 1 - 7 as digital/trigger inputs and pin 3 as INH input (pin 8 = common)	Maximum low-level input voltage = 0.8 V Minimum high-level input voltage = 2 V Typical low-level current = 2 mA @ 0 V (internal 2.2 k pull-up) Typical high-level leakage current = 0.12 mA @ 16.5 VDC	
<b>Interface Capabilities</b>			
	GPIB:	SCPI - 1993, IEEE 488.2 compliant interface	
	LXI Compliance	Class C (applies to mainframes with firmware revision C.00.02 and up)	
	USB 2.0	Requires Agilent IO Library version M.01.01 and up, or 14.0 and up	
	10/100 LAN	Requires Agilent IO Library version L.01.01 and up, or 14.0 and up	
	Built-in Web server	Requires Internet Explorer 5+ or Netscape 6.2+	
<b>Environmental Conditions</b>			
	Operating environment	Indoor use, installation category II (for AC input), pollution degree 2	
	Temperature range	0°C to 55°C (current is derated 1% per °C above 40°C ambient temperature)	
	Relative humidity	Up to 95%	
	Altitude	Up to 2000 meters	
	Storage temperature	-30°C to 70°C	
	LED statement	Any LEDs used in this product are Class 1 LEDs as per IEC 825-1	

## Agilent N6700B, N6701A, N6702A MPS Mainframes (Continued)

### N6700B, N6701A, N6702A

<b>Regulatory Compliance</b>	EMC	<p>Complies with the European EMC directive 89/336/EEC for Class A test and measurement products.</p> <p>Complies with the Australian standard and carries the C-Tick mark.</p> <p>This ISM device complies with Canadian ICES-001.</p> <p>Cet appareil ISM est conforme à la norme NMB-001 du Canada.</p> <p><b>Electrostatic discharges greater than 1 kV near the I/O connectors may cause the unit to reset and require operator intervention.</b></p>
	Safety	<p>Complies with the European Low Voltage Directive 73/23/EEC and carries the CE-marking. This product also complies with the US and Canadian safety standards for test and measurement products.</p>
<b>Acoustic Noise Declaration</b>	<p>This statement is provided to comply with the requirements of the German Sound Emission Directive, from 18 January 1991.</p>	<p>Sound Pressure Lp &lt; 70 dB(A),                      *At Operator Position, *Normal Operation, *According to EN 27779 (Type Test).                      Schalldruckpegel Lp &lt;70 dB(A)                      *Am Arbeitsplatz, *Normaler Betrieb, *Nach EN 27779 (Typprüfung).</p>
<b>Output Terminal Isolation</b>	Maximum Rating	No output terminal may be more than 240 VDC from any other terminal or chassis ground.
<b>AC Input</b>	Nominal Input Ratings	100 VAC – 240 VAC; 50/60 Hz/400 Hz
	Input Range	86 VAC – 264 VAC
	Power Consumption	1000 VA typical (N6700B mainframes) 1500 VA typical (N6701A mainframes) 3000 VA typical (N6702A mainframes)
	Fuse	Internal fuse (not customer accessible)
<b>Dimensions</b>	Height	44.45 mm; 1.75 in.
	Width	432.5 mm; 17.03 in.
	Depth (including handles)	585.6 mm; 23.06 in. (N6700B/N6701A mainframes) 633.9 mm; 24.96 in. (N6702A mainframes)
<b>Weight</b>	N6700B with 4 installed modules	Net: 12.73 kg; 28 lbs.
	N6701A with 4 installed modules	Net: 11.82 kg; 26 lbs.
	N6702A with 4 installed modules	Net: 14.09 kg; 31 lbs.
	Single-wide power module	Net: 1.23 kg; 2.71 lbs
	Double-wide power module	Net: 2.18 kg; 4.8 lbs

## Power Module Option Characteristics

### Output Relays (Option 760/761)

- **Type**  
Double-pole, double-throw
- **Location**  
output & sense terminals






### Output Lists (Option 054):

- Maximum number of steps = 512
- Maximum dwell time in seconds = 262
- Maximum list repetitions = 256, or infinite


### Digitized Measurements (Option 054)

- Maximum measurement points = 4096
- Maximum sample rate = 50 kHz

## Autorangeing Characteristic

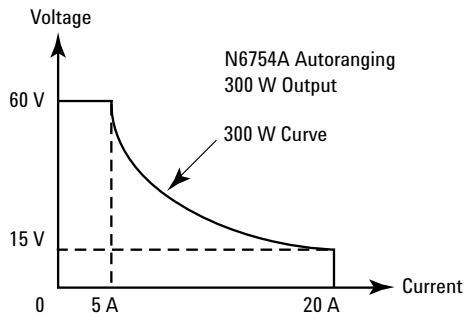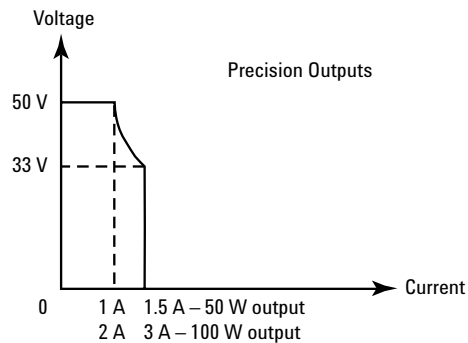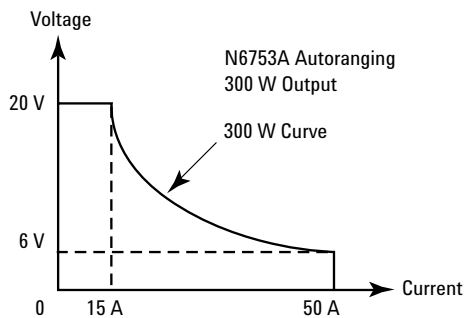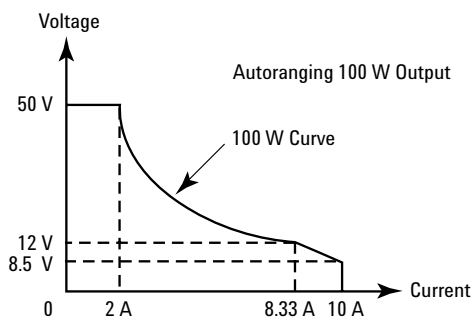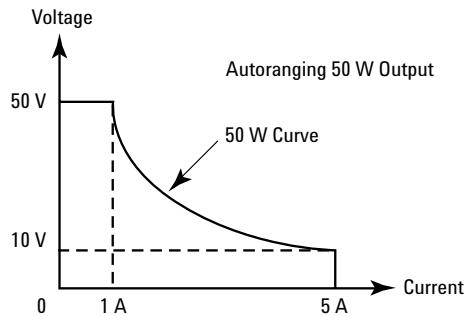

# Outline Diagram

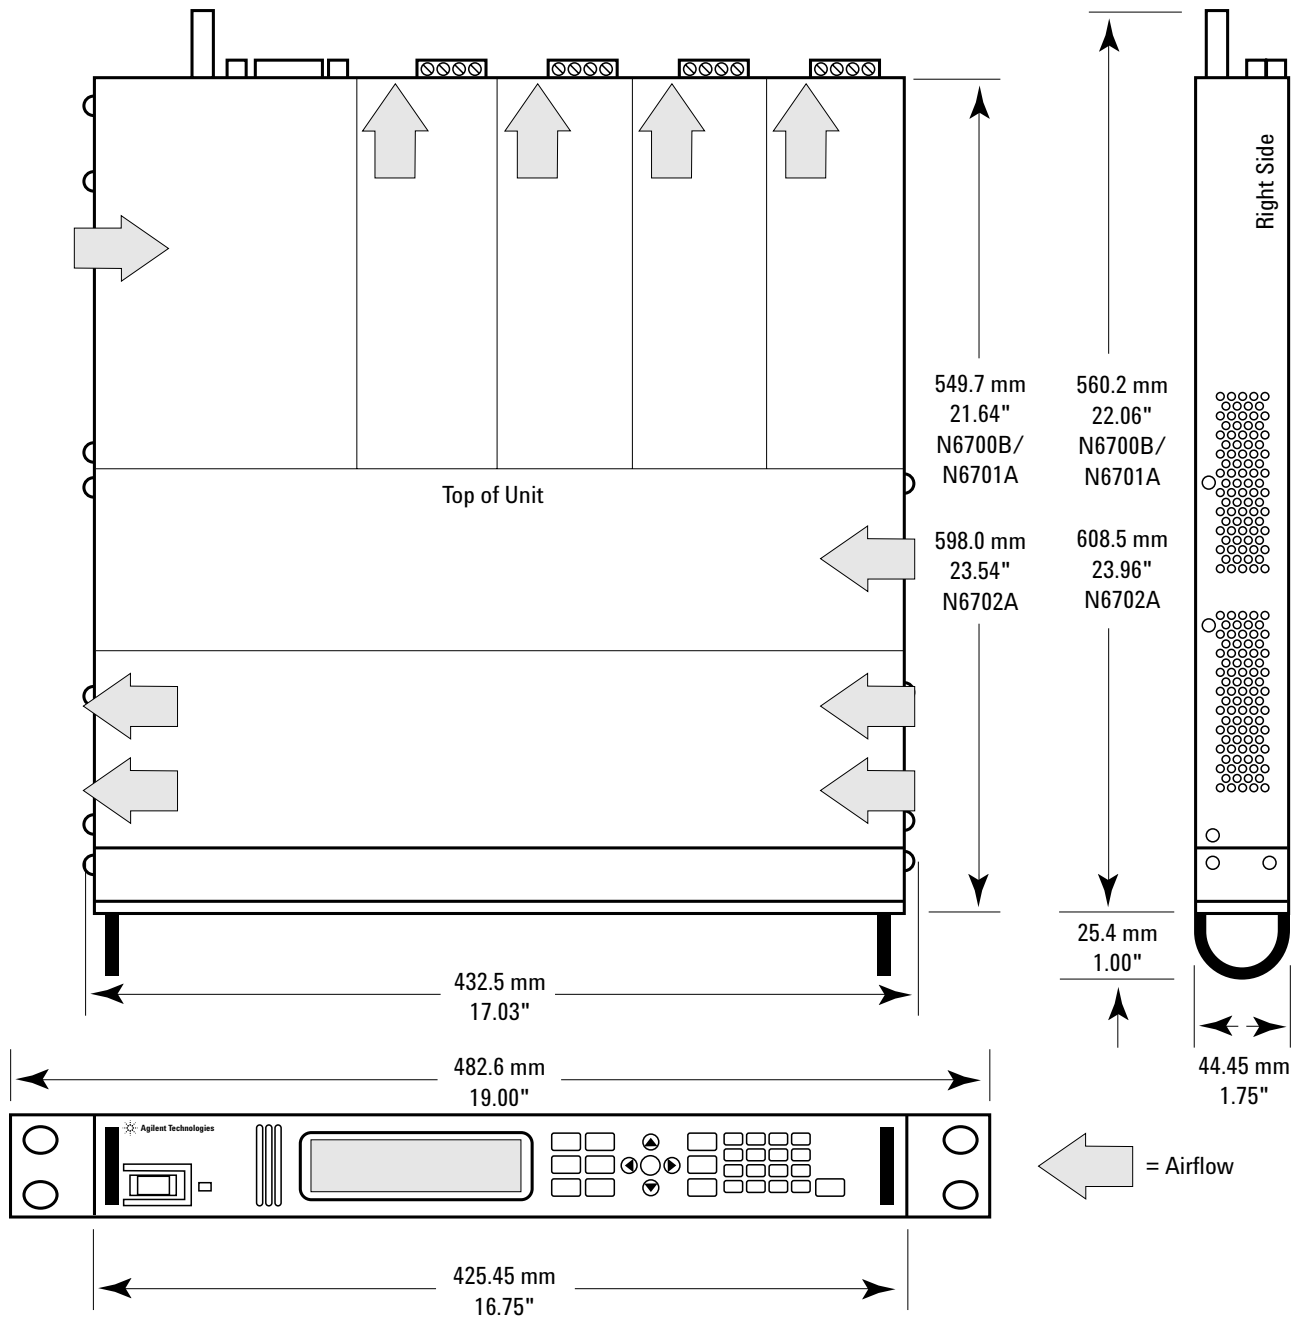

## Ordering Information

### The N6700 Modular Power System is available 2 ways:

- (1) You can order an N6700B, N6701A or N6702A mainframe and various modules as separate products. (See steps below.) Each item will arrive in a separate box such that you can assemble the system yourself when you need to.
- (2) You can order an N6710B, N6711A or N6712A system, which is a build-to-order system that is shipped as a fully assembled multiple-output power supply. (See pages 26 and 27 for N6710B, N6711A and N6712A ordering information.)

When ordering the N6700 MPS as a mainframe and modules, follow these steps:

#### Step 1:

Select which mainframe you want based on your power requirements.

#### Step 2:

Select the appropriate documentation and line cord options.

#### Step 3:

Order 1 to 4 modules (see next page). If the sum of the power of the modules exceeds the available output power rating on the mainframe, see page 4 for an explanation of Agilent's power management capability. Note that each mainframe has 4 module slots to hold modules. Each module occupies one module slot, except for the N6753A and the N6754A, which occupy 2 module slots per module.

#### Step 4:

For proper operation, you must fill any empty module slots with filler panels. When configuring a mainframe with less than 4 filled module slots, you MUST order a Filler Panel Kit. Each kit contains 3 filler panels. Each filler panel fills one empty module slot.

### Mainframes

<b>N6700B</b>	Low-Profile Modular Power System Mainframe, 400 W Holds 1 to 4 modules. Total available output power = 400 W.
<b>N6701A</b>	Low-Profile Modular Power System Mainframe, 600 W Holds 1 to 4 modules. Total available output power = 600 W.
<b>N6702A</b>	Low-Profile Modular Power System Mainframe, 1200 W Holds 1 to 4 modules. Total available output power = 1200 W.

### Available options to the N6700B, N6701A, N6702A Mainframes

<b>908</b>	Rack Mount Kit Required for rack mounting. Standard rack mount hardware will not work. This N6700 Rack Mount Kit is also orderable separately as product N6709A
<b>FLR</b>	Filler Panel Kit Required when you have < 4 modules in a mainframe. Each filler panel kit contains 3 filler panels. This Filler Panel Kit is also orderable as product N6708A.
<b>0L1</b>	Full documentation on CD-ROM and printed Users Guide
<b>0B0</b>	Full documentation on CD-ROM only; no printed documentation package
<b>900</b>	Power Cord, United Kingdom, P/N 8120-1351
<b>901</b>	Power Cord, Australia, New Zealand, P/N 8120-1369
<b>902</b>	Power Cord, Europe, Korea, P/N 8120-1689
<b>903</b>	Power Cord, USA, Canada, 120 V, P/N 8120-4383
<b>904</b>	Power Cord, USA, Canada, 240 V, P/N 8120-0698
<b>906</b>	Power Cord, Switzerland, P/N 8120-2104
<b>912</b>	Power Cord, Denmark, P/N 8120-2956
<b>917</b>	Power Cord, South Africa, India, P/N 8120-4211
<b>918</b>	Power Cord, Japan, 100 V, P/N 8120-5342 Note: For model N6702A, the maximum output power is limited to 600 W at 100 Vac. To achieve full output power of 1200 W, you must use option 929 and operate at 200 Vac.
<b>919</b>	Power Cord, Israel, P/N 8120-6800
<b>920</b>	Power Cord, Argentina, P/N 8120-6869
<b>921</b>	Power Cord, Chile, P/N 8120-6980
<b>922</b>	Power Cord, China, P/N 8120-8376
<b>927</b>	Power Cord, Thailand, Brazil, P/N 8120-8871
<b>929</b>	Power Cord, Japan, 200 V, P/N 8121-1392 Note: This option is available only on model N6702A.

#### Step 5:

If you will be rack mounting your N6700, you MUST order the Rack Mount Kit.



# Ordering Information

## Modules

Order 1 to 4 modules to be installed in each N6700B, N6701A or N6702A mainframe. (To order modules as part of the N6710B, N6711A or N6712A Build-to-order Systems, see page 27). If the sum of the power of the modules exceeds the available output power rating on the mainframe, see page 4 for an explanation of Agilent's power management capability.

You can individually specify each option for each module. For example, you can order one module with Option 761 Output Disconnect Relays while the remaining modules have no relay option.

As your needs change and you want to change configuration or add more modules to existing N6700A, N6700B, N6701A or N6702A mainframes, use this ordering information to order the required modules.

## Modules

<b>N6730 50 W DC Power Modules</b>	<b>N6731B</b>	5 V, 10 A, 50 W DC Power Module
	<b>N6732B</b>	8 V, 6.25 A, 50 W DC Power Module
	<b>N6733B</b>	20 V, 2.5 A, 50 W DC Power Module
	<b>N6734B</b>	35 V, 1.5 A, 50 W DC Power Module
	<b>N6735B</b>	60 V, 0.8 A, 50 W DC Power Module
<b>N6736B</b>	100 V, 0.5 A, 50 W DC Power Module	
<b>N6740 100 W DC Power Modules</b>	<b>N6741B</b>	5 V, 20 A, 100 W DC Power Module
	<b>N6742B</b>	8 V, 12.5 A, 100 W DC Power Module
	<b>N6743B</b>	20 V, 5 A, 100 W DC Power Module
	<b>N6744B</b>	35 V, 3 A, 100 W DC Power Module
	<b>N6745B</b>	60 V, 1.6 A, 100 W DC Power Module
	<b>N6746B</b>	100 V, 1 A, 100 W DC Power Module
<b>N6750 High-Performance, Autoranging DC Power Modules</b>	<b>N6751A</b>	50 V, 5 A, 50 W High-Performance Autoranging DC Power Module
	<b>N6752A</b>	50 V, 10 A, 100 W High-Performance Autoranging DC Power Module
	<b>N6753A</b>	20 V, 50 A, 300 W High-Performance Autoranging DC Power Module (occupies 2 module slots in the mainframe)
	<b>N6754A</b>	60 V, 20 A, 300 W High-Performance Autoranging DC Power Module (occupies 2 module slots in the mainframe)
<b>N6760 Precision DC Power Modules</b>	<b>N6761A</b>	50 V, 1.5 A, 50 W Precision DC Power Module
	<b>N6762A</b>	50 V, 3 A, 100 W Precision DC Power Module
<b>N6770 300 W DC Power Modules</b>	<b>N6773A</b>	20 V, 15 A, 300 W DC Power Module
	<b>N6774A</b>	35 V, 8.5 A, 300 W DC Power Module
	<b>N6775A</b>	60 V, 5 A, 300 W DC Power Module
	<b>N6776A</b>	100 V, 3 A, 300 W DC Power Module

## Available options to N6700 Modules

	<b>N6731B-N6736B 50 W DC Power Modules</b>	<b>N6741B-N6746B 100 W DC Power Modules</b>	<b>N6751A-N6752A High-Performance Autoranging DC Power Modules</b>	<b>N6753A-N6754A 300 W High-Performance Autoranging DC Power Modules</b>	<b>N6761A-N6762A Precision DC Power Modules</b>	<b>N6773A-N6776A 300 W DC Power Modules</b>
<b>Output Disconnect Relays</b>	761	761	761	761	761	761
<b>Output Disconnect and Polarity Reversal Relays</b>	760	760 (see note 1, 2)	Not available	760	Not available	760 (see note 2)
<b>High Speed Test Extensions (HSTE)</b>	Not available	Not available	054	054	Standard	Not available
<b>Large Size FPGA Installed</b>	Not available, not required	Not available, not required	LGA (Required, see note 3)	Not available, not required	Not available, not required	Not available, not required
<b>Commercial calibration with test results data</b>	UK6	UK6	UK6	UK6	UK6	UK6
<b>ISO 17025 Cal certificate</b>	1A7	1A7	1A7	1A7	1A7	1A7

<sup>1</sup> Option 760 is not available on N6741B.

<sup>2</sup> When Option 760 is installed in N6742B or N6773A, the maximum output current is limited to 10 A.

<sup>3</sup> You must order Option LGA on N6751A and N6752A modules. Option LGA adds a large size FGPA to the module. Option LGA is required to support the Output Sequencing between multiple mainframes. Option LGA will also allow for future expansion for additional firmware features.

## Ordering Information

### N6700 Build-to-order Systems

To purchase an N6700 system, order an N6710B, N6711A, or N6712A. These model numbers are build-to-order systems that are shipped as a fully tested and assembled multiple-output power supplies. Each system consists of one mainframe plus optionally 1 to 4 modules. Each mainframe has 4 module slots to hold modules. Each module occupies one module slot, except for the N6753A and the N6754A, which occupy 2 module slots per module. To specify which modules you want installed in the system, the modules are ordered as options to the system model number. If you order less than 4 modules, the empty slots will be automatically filled with blank filler panels. You must order at least 1 module.

If the sum of the power of the modules exceeds the available output power rating on the mainframe, see page 4 for an explanation of Agilent's power management capability.

If you prefer to purchase a mainframe and modules as separate pieces, see page 24.

### Build-to-order Systems

<b>N6710B System</b>	Build-to-order Modular Power System, 400 W Consists of 1 N6700B mainframe with total available power of 400 W.
<b>N6711A System</b>	Build-to-order Modular Power System, 600 W Consists of 1 N6701A mainframe with total available power of 600 W.
<b>N6712A System</b>	Build-to-order Modular Power System, 1200 W Consists of 1 N6702A mainframe with total available power of 1200 W.

### Available options to the N6710B, N6711A, N6712A Systems

<b>908</b>	Rack Mount Kit Required for rack mounting. Standard rack mount hardware will not work. This N6700 Rack Mount Kit is also orderable separately as product N6709A
<b>0L1</b>	Full documentation on CD-ROM and printed Users Guide
<b>0B0</b>	Full documentation on CD-ROM only; no printed documentation package
<b>900</b>	Power Cord, United Kingdom, P/N 8120-1351
<b>901</b>	Power Cord, Australia, New Zealand, P/N 8120-1369
<b>902</b>	Power Cord, Europe, Korea, P/N 8120-1689
<b>903</b>	Power Cord, USA, Canada, 120 V, P/N 8120-4383
<b>904</b>	Power Cord, USA, Canada, 240 V, P/N 8120-0698
<b>906</b>	Power Cord, Switzerland, P/N 8120-2104
<b>912</b>	Power Cord, Denmark, P/N 8120-2956
<b>917</b>	Power Cord, South Africa, India, P/N 8120-4211
<b>918</b>	Power Cord, Japan, 100 V, P/N 8120-5342 Note: For model N6712A, the maximum output power is limited to 600 W at 100 VAC. To achieve full output power of 1200 W, you must use option 929 and operate at 200 VAC.
<b>919</b>	Power Cord, Israel, P/N 8120-6800
<b>920</b>	Power Cord, Argentina, P/N 8120-6869
<b>921</b>	Power Cord, Chile, P/N 8120-6980
<b>922</b>	Power Cord, China, P/N 8120-8376
<b>927</b>	Power Cord, Thailand, Brazil, P/N 8120-8871
<b>929</b>	Power Cord, Japan, 200 V, P/N 8121-1392 Note: This option is available only on model N6712A.

## Ordering Information

### Modules as options to N6710B, N6711A or N6712A

To order 1 to 4 module as options to an N6710B, N6711A or N6712A, specify its model number, followed by “-ATO”. For example, to order an N6731B as an option to the N6710B, you would specify “N6731B-ATO” as the option. (To order modules as separate products, see page 25.) If the sum of the power of the modules exceeds the available output power rating on the mainframe, see page 4 for an explanation of Agilent’s power management capability.

You can individually specify each option for each module. For example, you can order one module with Option 761 Output Disconnect Relays while the remaining modules have no relay option.

### Module options for N6710B, N6711A and N6712A Systems

<b>N6730 50 W DC Power Modules</b>	<b>N6731B-ATO</b>	5 V, 10 A, 50 W DC Power Module
	<b>N6732B-ATO</b>	8 V, 6.25 A, 50 W DC Power Module
	<b>N6733B-ATO</b>	20 V, 2.5 A, 50 W DC Power Module
	<b>N6734B-ATO</b>	35 V, 1.5 A, 50 W DC Power Module
	<b>N6735B-ATO</b>	60 V, 0.8 A, 50 W DC Power Module
	<b>N6736B-ATO</b>	100 V, 0.5 A, 50 W DC Power Module
<b>N6740 100 W DC Power Modules</b>	<b>N6741B-ATO</b>	5 V, 20 A, 100 W DC Power Module
	<b>N6742B-ATO</b>	8 V, 12.5 A, 100 W DC Power Module
	<b>N6743B-ATO</b>	20 V, 5 A, 100 W DC Power Module
	<b>N6744B-ATO</b>	35 V, 3 A, 100 W DC Power Module
	<b>N6745B-ATO</b>	60 V, 1.6 A, 100 W DC Power Module
	<b>N6746B-ATO</b>	100 V, 1 A, 100 W DC Power Module
<b>N6750 High-Performance Autoranging DC Power Modules</b>	<b>N6751A-ATO</b>	50 V, 5 A, 50 W High-Performance Autoranging DC Power Module
	<b>N6752A-ATO</b>	50 V, 10 A, 100 W High-Performance Autoranging DC Power Module
	<b>N6753A-ATO</b>	20 V, 50 A, 300 W High-Performance Autoranging DC Power Module (occupies 2 module slots in the mainframe)
	<b>N6754A-ATO</b>	60 V, 20 A, 300 W High-Performance Autoranging DC Power Module (occupies 2 module slots in the mainframe)
<b>N6760 Precision DC Power Modules</b>	<b>N6761A-ATO</b>	50 V, 1.5 A, 50 W Precision DC Power Module
	<b>N6762A-ATO</b>	50 V, 3 A, 100 W Precision DC Power Module
<b>N6770 300 W DC Power Modules</b>	<b>N6773A-ATO</b>	20 V, 15 A, 300 W DC Power Module
	<b>N6774A-ATO</b>	35 V, 8.5 A, 300 W DC Power Module
	<b>N6775A-ATO</b>	60 V, 5 A, 300 W DC Power Module
	<b>N6776A-ATO</b>	100 V, 3 A, 300 W DC Power Module

### Available options to N6700 Modules

	<b>N6731B-ATO to N6736B-ATO 50 W DC Power Modules</b>	<b>N6741B-ATO to N6746B-ATO 100 W DC Power Modules</b>	<b>N6751A-ATO to N6752A-ATO High-Performance Autoranging DC Power Modules</b>	<b>N6753A-ATO to N6754A-ATO 300 W High-Performance Autoranging DC Power Modules</b>	<b>N6761A-ATO to N6762A-ATO Precision DC Power Modules</b>	<b>N6773A-ATO to N6776A-ATO 300 W DC Power Modules</b>
<b>Output Disconnect Relays</b>	761	761	761	761	761	761
<b>Output Disconnect and Polarity Reversal Relays</b>	760	760 (see note 1, 2)	Not available	760	Not available	760 (see note 2)
<b>High Speed Test Extensions (HSTE)</b>	Not available	Not available	054	054	Standard	Not available
<b>Large Size FPGA Installed</b>	Not available, not required	Not available, not required	LGA (Required, see note 3)	Not available, not required	Not available, not required	Not available, not required
<b>Commercial calibration with test results data</b>	UK6	UK6	UK6	UK6	UK6	UK6
<b>ISO 17025 Cal certificate</b>	1A7	1A7	1A7	1A7	1A7	1A7

<sup>1</sup> Option 760 is not available on N6741B-ATO.

<sup>2</sup> When Option 760 is installed in N6742B-ATO or N6773A-ATO, the maximum output current is limited to 10 A.

<sup>3</sup> You must order Option LGA on N6751A and N6752A modules. Option LGA adds a large size FPGA to the module. Option LGA is required to support the Output Sequencing between multiple mainframes. Option LGA will also allow for future expansion for additional firmware features.

## Compatibility and Upgrade Information

Agilent recommends that you keep your N6700 system up to date with the latest firmware available at [www.agilent.com/find/N6700firmware](http://www.agilent.com/find/N6700firmware).

You have	with firmware	and with modules	If you want to ...	... here is what you need to do
<b>N6700A or N6710A</b>	Any version of firmware starting with A (example: A.00.00)	Any combination of modules with model number N673xA, N674xA, N6751A, N6752A, or N676xA	Add or change modules to mix-and-match any combination of modules with model numbers N673xA, N674xA, N675xA or N676xA	Capability is available with your current version of hardware and firmware. No upgrade required.
			Add or change modules to mix-and-match any combination of modules with model numbers N673xA, N673xB, N674xA, N674xB, N675xA, N676xA or N677xA including new modules N6753A and N6754A	Install firmware version C.02.00 or greater available at <a href="http://www.agilent.com/find/N6700firmware">www.agilent.com/find/N6700firmware</a>
			Add new capabilities <ul style="list-style-type: none"> <li>• Virtual channel capability for paralleling</li> <li>• Programmable voltage slew capability</li> <li>• Power management capability</li> <li>• Output sequencing across mainframes</li> </ul>	Install firmware version C.02.00 or greater available at <a href="http://www.agilent.com/find/N6700firmware">www.agilent.com/find/N6700firmware</a>
<b>N6700A or N6710A</b>  <b>N6700B or N6710B</b>	Any version of firmware B.00.34 or earlier	Any combination of modules with model number N673xA, N673xB, N674xA, N674xB, N6751A, N6752A, or N676xA	Add or change modules to mix-and-match any combination of modules with model numbers N673xA, N673xB, N674xA, N674xB, N675xA or N676xA	Capability is available with your current version of hardware and firmware. No upgrade required.
			Add or change modules to mix-and-match any combination of modules with model numbers N673xA, N673xB, N674xA, N674xB, N675xA, N676xA or N677xA including new modules N6753A and N6754A	Install firmware version C.02.00 or greater available at <a href="http://www.agilent.com/find/N6700firmware">www.agilent.com/find/N6700firmware</a>
			Add new capabilities <ul style="list-style-type: none"> <li>• Power management capability</li> <li>• Output sequencing across mainframes</li> </ul>	Install firmware version C.02.00 or greater available at <a href="http://www.agilent.com/find/N6700firmware">www.agilent.com/find/N6700firmware</a>
<b>N6700A or N6710A</b>  <b>N6700B or N6710B</b>	C.02.00 or C.01.04	Any combination of modules with model number N673xA, N673xB, N674xA, N674xB, N675xA, N676xA, or N677xA	Add or change modules to mix-and-match any combination of modules with model numbers N673xA, N673xB, N674xA, N674xB, N675xA, N676xA or N677xA	Capability is available with your current version of hardware and firmware. No upgrade required.
			Add new capabilities <ul style="list-style-type: none"> <li>• Power management capability</li> <li>• Output sequencing across mainframes</li> </ul>	Capability is available with your current version of hardware and firmware. No upgrade required.
<b>N6701A or N6711A</b>			Add new modules N6753A and N6754A	Install firmware version C.02.00 or greater available at <a href="http://www.agilent.com/find/N6700firmware">www.agilent.com/find/N6700firmware</a>

## Compatibility and Upgrade Information (Continued)

Agilent recommends that you keep your N6700 system up to date with the latest firmware available at [www.agilent.com/find/N6700firmware](http://www.agilent.com/find/N6700firmware).

You have	with firmware	and with modules	If you want to ...	... here is what you need to do
<b>N6721A through N6729A</b>	Any version of firmware starting with A (example: A.00.00)	Any combination of modules with model number N675xA or N676xA	Add more modules with model numbers N675xA or N676xA	Capability is available with your current version of hardware and firmware. No upgrade required.
			Add or change modules to mix-and-match any combination of modules with model numbers N673xA, N673xB, N674xA, N674xB, N675xA, N676xA or N677xA (see note 1 below)	Install firmware version C.02.00 or greater available at <a href="http://www.agilent.com/find/N6700firmware">www.agilent.com/find/N6700firmware</a>
			Add new capabilities <ul style="list-style-type: none"> <li>• Virtual channel capability for paralleling</li> <li>• Programmable voltage slew capability</li> <li>• Power management capability</li> <li>• Output sequencing across mainframes</li> </ul> (see note 2 below)	Install firmware version C.02.00 or greater available at <a href="http://www.agilent.com/find/N6700firmware">www.agilent.com/find/N6700firmware</a>

**Notes:**

<sup>1</sup> If you add modules with model numbers N673xA, N673xB, N674xA, N674xB, N6753A, N6754A or N677xA, you will not be able to access the Agilent 662x command set capability of your N672xA for any installed modules. Only SCPI commands will be accepted.

<sup>2</sup> These features are not available in the Agilent 662x command set. You must use SCPI commands to access these new programmable features.

**Compatibility with older models**

If you previously purchased an Agilent 662xA or N672xA, and you want to make another purchase, use the table at right to find the equivalent configuration of N6700B Low-Profile Modular Power System Mainframe and DC Power Modules.

Older Agilent Model	A version model number	Equivalent configuration with latest N6700 series models
6621A	N6721A	N6700B + 2 x N6752A
6622A	N6722A	N6700B + 2 x N6752A
6623A	N6723A	N6700B + 2 x N6751A 1 x N6752A
6624A	N6724A	N6700B + 4 x N6751A
6625A	N6725A	N6700B + 1 x N6761A 1 x N6762A
6626A	N6726A	N6700B + 2 x N6761A 2 x N6762A
6627A	N6727A	N6700B + 4 x N6751A
6628A	N6728A	N6700B + 2 x N6762A
6629A	N6729A	N6700B + 4 x N6762A

### Need a power solution for R&D bench work?

The new Agilent N6705A DC Power Analyzer saves time

- Provides unrivaled productivity gains for sourcing and measuring DC voltage and current **into your DUT** by integrating up to 4 advanced power supplies with DMM, Scope, Arb, and Datalogger features.
- Eliminates the need to gather multiple pieces of equipment, create complex test setups including transducers (such as current probes and shunts) to measure current into your DUT.
- Eliminates the need to develop and debug programs to control a collection of instruments and take useful measurements because all the functions and measurements are available at the front panel.
- Modular system: Uses the same DC Power Modules at the N6700 Low-Profile Modular Power System



Complete specifications can be found in the N6705A DC Power Analyzer Data Sheet, publication 5989-6319EN

For more information go to

[www.agilent.com/find/dcpoweranalyzer](http://www.agilent.com/find/dcpoweranalyzer)

Authorized Agilent Distributor

Click here to Buy:

**TRANSCAT**

800.800.5001

Transcat.com

© Agilent Technologies, Inc. 2007  
Printed in USA, June 15, 2007  
5989-1411EN



**Agilent Technologies**