

**NEW**

**YOKOGAWA** 

# Clamp-on Power Meter

**CW10**

## A Simple Yet A Powerful Power Measuring Tool.

### Features

- AC / DC Power up to 600 kW
- True RMS for AC .
- Harmonics 1st to 25th order
- Power fluctuation using the ACA Inrush and Peak hold functions.
- AC / DC Voltage max. 1000 V
- AC / DC Current max. 600 A
- Frequency, Resistance, Continuity, Diode check, Power factor.
- Up to 9999 counts, approx. 37mm max. diameter of measurable conductor (the jaw opens approx. 45mm max.)


### For Safety

- CATIV 600V and CATIII 1000V compliant.

### Useful Functions

- Backlight on the display area turns on and a white LED automatically illuminates the front of jaw when clamping.
- Non-contact Voltage Detection (Red LED lights up on detection).
- Easy Operation with the Navigator key.
- Low Pass Filter, Phase Detection, AC / DC Auto Sense.

Motor power measurement application

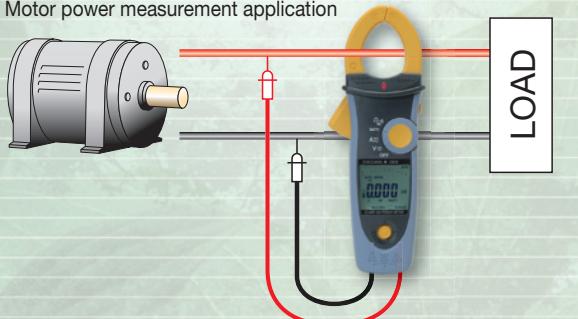

**CE**





[URL : tmi.yokogawa.com](http://tmi.yokogawa.com)

Yokogawa Meters & Instruments Corporation

LF CW10-EN

## Application

### Inrush Current Measurement Method

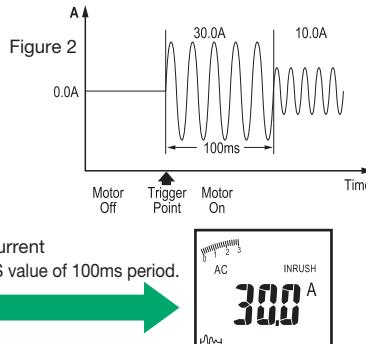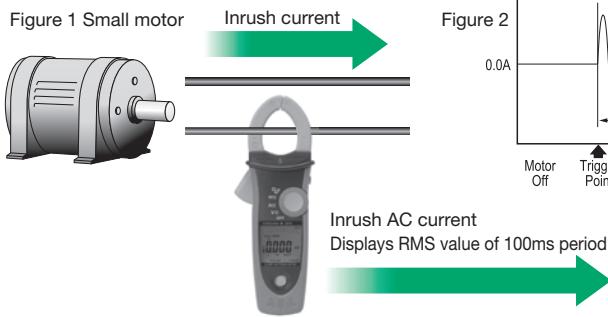

### Explanation

A function to measure inrush current is available. This function allows you to easily measure inrush current that occurs when starting a motor, relay, or the like. Just clamp the CW10 to the motor and set INRUSH before starting the motor to automatically measure and hold the inrush current that occurred in 100 ms period (Figure 2).

### What is inrush current?

Starting current or inrush current is the instantaneous electrical current that flows when the power is initially turned on.

## Specifications

### Accuracy

23± 5°C, 80%RH or less  
Accuracy: ±% of reading + digits)

### Voltage

Function	Range	Resolution (Maximum reading)	Rms-value detection
DCV	100 V	99.99 V	0.7% + 2
	1000 V	999.9 V	
ACV	100 V	99.99 V	1.0% + 5 50 ~ 500Hz
	1000 V	999.9 V	
LPF ACV	100 V	99.99 V	50 ≤ f ≤ 60Hz: 1.0% + 5 60 < f ≤ 400Hz: 5.0% + 5
	1000 V	999.9 V	

\* DCV<1000digits: add 6digits to accuracy  
ACV<1000digits: add 3digits to accuracy  
Maximum input voltage: 1000 Vrms, 1414.2 Vpk  
Input impedance: approx. 3.5MΩ, <100pF  
AC+DC Vrms accuracy=ACV accuracy + DCA accuracy

### Current

Function	Range	Resolution (Maximum reading)	Rms-value detection
DCA	100 A	99.99 A	1.5% + 20
	600 A	600.0 A***	
ACA	100 A**	99.99 A	50 ≤ f ≤ 60Hz: 1.5% + 5* 60 < f ≤ 400Hz: 2.0% + 5*
	600 A	600.0 A***	
LPF ACA	100 A**	99.99 A	50 ≤ f ≤ 60Hz: 1.5% + 5 60 < f ≤ 400Hz: 5.0% + 5
	600 A	600.0 A***	

\*The measured value <1000digits: add 5digits to accuracy  
\*\*Input current ≥ 0.10A at 100 A range of ACA and LPF ACA  
\*\*\*600 A : Guaranteed accuracy (not maximum reading)  
Maximum input current: 600 Arms, 848.5Apk  
Conductor position effects: ±1.0% of reading  
AC+DC Arms accuracy=ACA accuracy + DCA accuracy

Crest factor effects  
1.4 < CF ≤ 2.0: add 1.0% of reading to accuracy  
2.0 < CF ≤ 2.5: add 2.5% of reading to accuracy  
2.5 < CF ≤ 3.0: add 4.0% of reading to accuracy  
Maximum input voltage: 690 Vrms CF=2 460 Vrms CF=3

### Peak Hold (AC mode only)

Function	Range	Resolution (Maximum reading)	Accuracy
ACV	100 V	140.0 V	3.0% + 15
	1000 V	1400 V	
ACA	100 A	140.0 A	3.0% + 15
	600 A	850 A	

PEAK MAX: polarity+, polarity-  
Maximum input voltage and current: 1000 Vrms, 600 Arms  
Sine wave, ACV ≥ 5 Vrms, ACA ≥ 5 Arms, 50 to 400 Hz continuous wave

### Frequency (Hz)

Function	Resolution (Measuring range)	Accuracy
100 Hz	20.00 to 99.99 Hz	
1000 Hz	20.0 to 999.9 Hz	
10 kHz	0.020 to 9999 kHz	0.5% + 3

Maximum input voltage and current: 1000 Vrms, 600 Arms  
Input condition: 100 V range: 10 to 100 Vrms  
(Sine wave) 1000 V range: 100 to 1000 Vrms  
100 A range: 10 to 100 Arms (<400Hz)  
600 A range: 100 to 600 Arms (<400Hz)

The measured value < approx. 10 Hz: 0.00Hz

### Harmonic Measurement

#### Individual Harmonic

Harmonic order	Resolution (Maximum reading)	Accuracy
1st to 12th (h01~h12)	99.9 %	5% + 10
13th to 25th (h01~h12)		10% + 10

Maximum input voltage and current: approx. 1000 Vrms, 600 Arms  
The "rdy" is displayed at ACV < 10 Vrms, ACA < 10 Arms

The "OutF" is displayed at f < 45, 65 < f (fundamental frequency)

### Inrush Current

Function	Range	Resolution (Maximum reading)	Accuracy
ACA	100 A	99.99 A	2.5% + 20
	600 A	600.0 A*	

Maximum input current: approx. 600 Arms  
\*600 A : Guaranteed accuracy (not maximum reading)

600A range: ACA ≥ 100 Arms (Sine wave, 50Hz/60Hz)

Measurement time: approx. 100ms

### Active Power

Function	Range	Resolution (Maximum reading)	Accuracy
ACW DCW	10 kW	9.999 kW*	ACW: 2.5% + 11 DCW: 2.2% + 22
	100 kW	99.99 kW	
	600 kW	600.0 kW**	

\* The measured value < 1.000kW: add 10digits to the accuracy.  
\*\*600 kW : Guaranteed accuracy (not maximum reading)  
Maximum input voltage and current: 1000 Vrms, 600 Arms

Power Factor	Function	Resolution (Measuring range)	Accuracy
	Power factor	-1.00~0.00~1.00	±(3+2digits)

Maximum input voltage and current: 1000 Vrms, 600 Arms

PF: ACV ≥ 10 Vrms and ACA ≥ 5 Arms (Sine wave, 50 ≤ f ≤ 60Hz)

Function	Range	Resolution (Maximum reading)	Accuracy
Resistance Ω	1000 Ω	999.9 Ω	1.0% + 5
	10 kΩ	9.999 kΩ	
	100 kΩ	99.99 kΩ	1.0% + 3
	1000 Ω	999.9 Ω	

Maximum input voltage: 1000 Vrms  
Maximum test current: approx. 0.5mA  
Open circuit voltage: approx. 3V

### Diode Test

Function	Resolution (Measuring range)	Accuracy
Diode Test	0.40~0.80 V	±0.1 V

Maximum test current: approx. 0.5mA

Open circuit voltage: approx. 1.8V

### General Specifications

Display count: 9999 / 6000  
Measuring rate: 3 times / sec.  
Over range indicator: "OL" or "OL"  
Auto Power Off: Approx. 15 minute.  
Low-battery indicator: ■ (four steps)  
Power supply: 9V alkaline battery (6LR61)  
Battery life: When using alkaline battery, backlight off  
Approx. 20 hours  
Operating temperature and humidity: 0 ~ 50 °C (with no condensation)  
≤ 80% RH (0 ~ 30 °C)  
≤ 75% RH (30 ~ 40 °C)  
≤ 45% RH (40 ~ 50 °C)  
Temperature coefficient: At 0 to 18 °C and 28 to 50 °C  
Add 23± 5 °C accuracy x 0.2 / °C  
Storage temperature: -10 to 50 °C, 80% RH or less (remove the battery)  
Withstand voltage: AC 6880 Vrms 5 sec. (between the core and the case)  
AC 4300 Vrms 5 sec.  
(between the core and the voltage input terminals)  
AC 6880 Vrms 5 sec.  
(between the voltage input terminals and the case)  
Insulation resistance: 100MΩ or greater at 1000 VDC  
(between the core and the case, the core and the voltage input terminals and the voltage input terminals and the case)  
Compliant standards: Safety standards: EN 61010-1, EN 61010-2-032  
1000V CAT.III, 600V CAT.IV  
EN 61010-031 (the test leads)  
Pollution degree 2, Indoor use, Altitude 2000m or less  
EMC standards: EN 61326-1, EN 61326-2-1, EN 61326-2-2, EN 55011  
Dimensions: Approx 87.5 mm(W) x 242 mm(L) x 51 mm(D)  
Diameter of measurable conductors: φ37mm (Maximum)  
Weight: Approx. 435g (including the battery)  
Accessories: Test leads 1set (Red and Black)  
Carrying case  
9V alkaline battery (6LR61)  
User's Manual

# YOKOGAWA

**YOKOGAWA METERS & INSTRUMENTS CORPORATION**

Global Sales Dept. /Phone: +81-42-534-1413 Facsimile: +81-42-534-1438

E-mail: tm@cs.jp.yokogawa.com

**YOKOGAWA CORPORATION OF AMERICA**

**YOKOGAWA EUROPE B.V.**

**YOKOGAWA ENGINEERING ASIA PTE. LTD.**

Phone: (1)-770-253-7000, Fax: (1)-770-254-0928

Phone: (31)-88-4641000, Fax: (31)-88-4641111

Phone: (65)-62419933, Fax: (65)-62412606

Subject to change without notice.

[Ed : 01/b] Copyright ©2011

Printed in Japan, 107(KP)