

80W Switching Mode DC Power Supply




TRANSCAT

 Visit us at [Transcat.com!](http://Transcat.com)

35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001

Features:

- Constant voltage or current
- 3 selectable ranges:
 - 0 to 16V/0 to 5A
 - 0 to 27V/0 to 3A
 - 0 to 36V/0 to 2.2A
- 4-Digit LED displays
- Front/Rear output terminals
- Remote sensing for accurate applied voltage at load point
- Compact slim tower housing is ideal for tight work bench
- Lightweight for easy portability
- Complete with AC Power cord

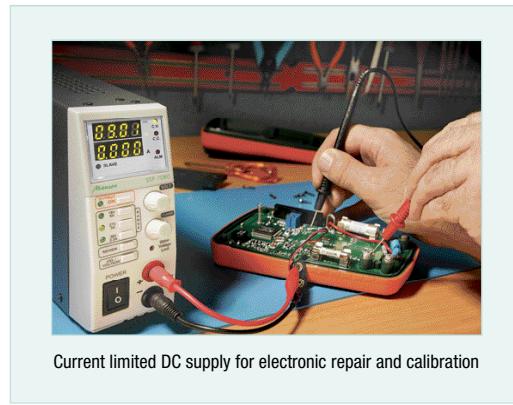

Current limited DC supply for electronic repair and calibration

Specifications

Voltage Output (3 ranges)	0 to 16.4V	0 to 27.6V	0 to 36.8V
Current Output (3 ranges)	0 to 5.1A	0 to 3.1A	0 to 2.3A
Basic accuracy	±1%		
Ripple & Noise	<30mVpp		
Line Regulation	<4mV		
Load Regulation	<20mV		
Display	Dual 4-digit LED displays		
Power	90-264VAC; 47-63Hz		
Dimensions	13 x 5 x 2" (330 x 127 x 53.5mm)		
Weight	4.2lbs (1.9kg)		

Ordering Information:

38226080W Switching Mode DC Power Supply

TRANSCAT

 Visit us at [Transcat.com!](http://Transcat.com)

35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001