

# Why Measure Soil Resistivity?

Soil resistivity measurements have a threefold purpose. First, such data is used to make sub-surface geophysical surveys as an aid in identifying ore locations, depth to bedrock and other geological phenomena. Second, resistivity has a direct impact on the degree of corrosion in underground pipelines. A decrease in resistivity relates to an increase in corrosion activity and therefore dictates the protective treatment to be used. Third, soil resistivity directly affects the design of a grounding system, and it is to that task that this discussion is directed. When designing an extensive grounding system, it is advisable to locate the area of lowest soil resistivity in order to achieve the most economical grounding installation.

## Effects of Soil Resistivity on Ground Electrode Resistance

Soil resistivity is the key factor that determines what the resistance of a grounding electrode will be, and to what depth it must be driven to obtain low ground resistance. The resistivity of the soil varies widely throughout the world and changes seasonally. Soil resistivity is determined largely by its content of electrolytes, which consist of moisture, minerals and dissolved salts. A dry soil has high resistivity if it contains no soluble salts (Figure 1).

| Resistivity (approx), Ohm-centimeters             |         |         |         |
|---|---------|---------|---------|
| SOIL  | MINIMUM | AVERAGE | MAXIMUM |
| Ashes, cinders, brine, waste                      | 590     | 2370    | 7000    |
| Clay, shale, gumbo, loam                          | 340     | 4060    | 16,300  |
| Same, with varying proportions of sand and gravel | 1020    | 15,800  | 135,000 |
| Gravel, sand, stones with little clay or loam     | 59,000  | 94,000  | 458,000 |

Figure 1

## Factors Affecting Soil Resistivity

Two samples of soil, when thoroughly dried, may in fact become very good insulators having a resistivity in excess of  $10^9$  ohm-centimeters. The resistivity of the soil sample is seen to change quite rapidly until approximately 20% or greater moisture content is reached (Figure 2).

| Moisture content<br>% by weight | Resistivity (Ohm-centimeters) |            |
|---------------------------------|-------------------------------|------------|
|                                 | TOP SOIL                      | SANDY LOAM |
| 0                               | $>10^9$                       | $>10^9$    |
| 2.5                             | 250,000                       | 150,000    |
| 5                               | 165,000                       | 43,000     |
| 10                              | 53,000                        | 18,500     |
| 15                              | 19,000                        | 10,500     |
| 20                              | 12,000                        | 6300       |
| 30                              | 6400                          | 4200       |

Figure 2

The resistivity of the soil is also influenced by temperature. Figure 3 shows the variation of the resistivity of sandy loam, containing 15.2% moisture, with temperature changes from  $20^\circ$  to  $-15^\circ\text{C}$ . In this temperature range the resistivity is seen to vary from 7200 to 330,000 ohm-centimeters.

| Temperature |            | Resistivity<br>(Ohm-centimeters) |
|-------------|------------|----------------------------------|
| C           | F          |                                  |
| 20          | 68         | 7,200                            |
| 10          | 50         | 9,900                            |
| 0           | 32 (water) | 13,800                           |
| 0           | 32 (ice)   | 30,000                           |
| -5          | 23         | 79,000                           |
| -15         | 14         | 330,000                          |

Figure 3

Because soil resistivity directly relates to moisture content and temperature, it is reasonable to assume that the resistance of any grounding system will vary throughout the different seasons of the year. Such variations are shown in Figure 4. Since both temperature and moisture content become more stable at greater distances below the surface of the earth, it follows that a grounding system, to be most effective at all times, should be constructed with the ground rod driven down a considerable distance below the surface of the earth. Best results are obtained if the ground rod reaches the water table.

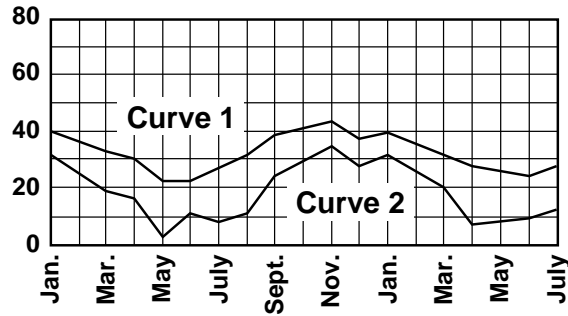


Figure 4

Seasonal variation of earth resistance with an electrode of 3/4-inch pipe in rather stony clay soil. Depth of electrode in earth is 3 ft. for Curve 1, and 10 ft. for Curve 2

In some locations, the resistivity of the earth is so high that low-resistance grounding can be obtained only at considerable expense and with an elaborate grounding system. In such situations, it may be economical to use a ground rod system of limited size and to reduce the ground resistivity by periodically increasing the soluble chemical content of the soil. Figure 5 shows the substantial reduction in resistivity of sandy loam brought about by an increase in chemical salt content.

| THE EFFECT OF SALT* CONTENT ON THE RESISTIVITY OF SOIL<br>(Sandy loam, Moisture content, 15% by weight, Temperature, 17°C) |                                  |
|--|----------------------------------|
| Added Salt<br>(% By weight of moisture)  | Resistivity<br>(Ohm-centimeters) |
| 0  | 10,700                           |
| 0.1  | 1800                             |
| 1.0  | 460                              |
| 5  | 190                              |
| 10   | 130                              |
| 20   | 100                              |

Figure 5

Chemically treated soil is also subject to considerable variation of resistivity with temperature changes, as shown in Figure 6. If salt treatment is employed, it is necessary to use ground rods, which will resist chemical corrosion.

| THE EFFECT OF TEMPERATURE ON THE RESISTIVITY<br>OF SOIL CONTAINING SALT<br>(Sandy loam, 20% moisture, Salt 5% of weight of moisture) |                                  |
|--|----------------------------------|
| Temperature<br>C   | Resistivity<br>(Ohm-centimeters) |
| 20   | 110                              |
| 10   | 142                              |
| 1.00   | 190                              |
| -5   | 312                              |
| -13  | 1440                             |

Figure 6

\*Such as copper sulfate, sodium carbonate, and others  
Salts must be EPA or local ordinance approved prior to use.

# Contact Us

## United States & Canada:

Chauvin Arnoux®, Inc.  
d.b.a. AEMC® Instruments  
200 Foxborough Blvd.  
Foxborough, MA 02035 USA  
(508) 698-2115 • Fax (508) 698-2118  
www.aemc.com

**Customer Support – for placing an order, obtaining price & delivery:**  
customerservice@aemc.com

**Sales Department – for general sales information:**  
sales@aemc.com

**Repair and Calibration Service – for information on repair & calibration, obtaining a user manual:**  
repair@aemc.com

**Technical and Product Application Support – for technical and application support:**  
techinfo@aemc.com

**Webmaster – for information regarding www.aemc.com:**  
webmaster@aemc.com

## South America, Australia & New Zealand:

Chauvin Arnoux®, Inc.  
d.b.a. AEMC® Instruments  
15 Faraday Drive  
Dover, NH 03820 USA  
(978) 526-7667 • Fax (978) 526-7605  
export@aemc.com

## All other countries:

Chauvin Arnoux  
190, rue Championnet  
75876 Paris Cedex 18, France  
33 1 44 85 45 28 • Fax 33 1 46 27 73 89  
info@chauvin-arnoux.com