
Pomona®



35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001

Model 3284 Adapter, BNC "T" Female-Female-Female

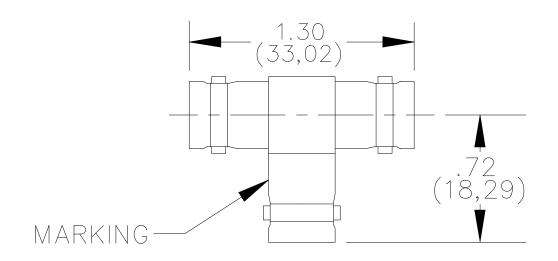

MATERIALS:

Body and Fittings – Brass, Tarnish Resistant Plating, Center Contact – Gold Plated Beryllium Copper Dielectric: PTFE Marking: "Pomona 3284"

RATING:

Operating Voltage: Shield/Earth: 30VAC/60VDC Max. Inner Conductor/Shield: 500VRMS Max. Operating Temperature: -65°C to +165°C Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 3284

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

