


Visit us at Transcat.com!

35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001

Pomona®

Model 3966 Bnc (Female) To Miniature Banana Plugs

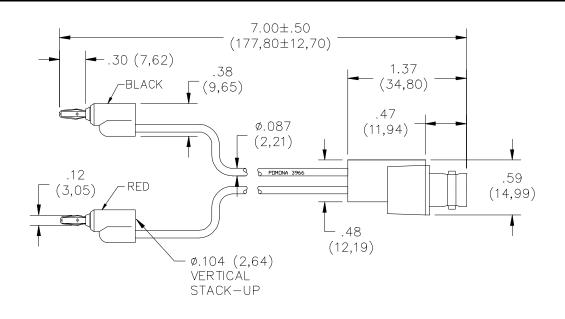

FEATURES:

- Converts BNC (Male) cables to stackable miniature banana plugs for test versatility.
- BNC connector and banana plugs are molded directly to the wire for pull strength durability and dust/moisture resistance.
- BNC dielectric is PTFE for superior temperature performance
- BNC center contact and miniature banana plug springs are gold plated Beryllium Copper for corrosion resistance, low contact resistance and long insertion life.

MATERIALS:

BNC: Body - Brass, Nickel Plated

Center Contact - Beryllium Copper, Gold Dielectric: PTFE

Wire: 20 AWG, Stranding 41 x 36 T.C., PVC Insulated, .087" (2,21 mm) O.D., Color matches banana plugs Marking: "POMONA 3966"

Miniature Banana Plugs: Body - Brass Gold Plated

Spring - Beryllium Copper, Gold Plated

Insulation: Polypropylene Color: Red to BNC center contact, Black to BNC Shell

RATINGS:

Operating Voltage: Hand-Held testing: 30VAC/60VDC Max.

Hands free testing in controlled voltage environments: 500VRMS Max. Operating Temperature: $+55^{\circ}C$ ($+131^{\circ}F$) Max.

ORDERING INFORMATION: Model 3966

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA



35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001