

# SMRT410 and 410D

## Multi-Phase Relay Test System

# Megger<sup>®</sup>



- **Small, rugged, lightweight, and powerful**
- **Daisy chain up to five units and control all units on the same screen. This provides the channels of all the units into one test set**
- **Intuitive manual operation with Smart Touch View Interface or the integrated onboard display**
- **High current, high power output (60 A/319 VA RMS) per phase**
- **Flexible output design - up to four-phase voltages and up to ten-phase currents**
- **Dynamic, transient, and GPS satellite synchronised end-to-end testing capability**
- **IEC 61850 GOOSE testing capability and IEC 61850 9-2 LE sampled values compliant**

## DESCRIPTION

The SMRT410 and 410D has the “smart” combination of high compliance voltage and high current output to test all electromechanical, solid-state, and microprocessor-based overcurrent relays, including voltage controlled, voltage restraint and high impedance directional ground overcurrent relays.

The SMRT410 and 410D provides a complete multi-phase test system for commissioning of protection systems. With up to 4 voltage channels and 6 high current channels, the SMRT410 and 410D meets every testing need. The SMRT410 and 410D VIGEN modules provide high power in BOTH the voltage and current channels to test virtually all types of protective relays. The SMRT410 and 410D test system may be customized by adding the number of Voltage-Current, “VIGEN”, modules needed for specific test applications.

The SMRT410 test system can be manually controlled with Megger’s stand-alone Smart Touch View Interface™ (STVI) handheld controller or the integrated onboard display on the SMRT410D running the new RTMS, Relay Test Management Software. The STVI, with its large, easy to read full color, high resolution, TFT LCD touch screen allows the user to perform manual, steady-state, and dynamic testing quickly and easily using the manual test screen, as well as using built-in preset test routines for most popular relays.

The STVI and onboard display eliminates the need for a computer when testing virtually all types of relays. Menu screens and touch screen function buttons are provided to select the desired test function quickly and easily. Tests results can be saved to the STVI or onboard display’s internal memory for later download to a USB Thumb drive to transfer or print test reports.

For fully automatic testing every SMRT unit is supplied with Relay Test Management Software (RTMS) for installing on a PC. It does not require a security dongle or license to operate and can be loaded on as many customer-owned computers as required. There are two different levels of RTMS, Standard, and Enhanced, see ordering information for details. Megger also supports customers using the legacy Advanced Visual Test Software (AVTS).

## APPLICATIONS

The test system may be customized by adding the number of voltage/ current, “VIGEN”, modules needed for specific test applications, with a maximum of six channels. For example, the SMRT410 or 410D with four VIGEN modules and one DIGEN module provides six-phase currents and four-phase voltages for testing of transformer differential, three-phase impedance, directional power, negative sequence overcurrent and other devices that require a three-phase four-wire wye connected sources. Each current channel is rated for 32 A at 200 VA RMS continuous, and up to 60 A at 319 VA RMS for short durations. For testing relay panels or electromechanical relays, it has a unique flat power curve from 4 to 32 A that always ensures maximum compliance voltage to the load. With a maximum compliance voltage of 50 V RMS per phase, two channels in series provide 100 V to test high impedance relays. With three current channels in parallel the unit can provide up to 180 A at 957 VA for testing all instantaneous overcurrent relays.

Each voltage channel can provide variable outputs of 0 - 30/150/ 300 V at 150 VA of output power and always has a unique flat power curve from 30 to 150 V ensuring maximum output power to the load. With the voltage channels converted to current, a five-channel unit can provide ten currents.

# SMRT410 and 410D Multi-Phase Relay Test System

**Megger**<sup>®</sup>

## APPLICATIONS SELECTION GUIDE

| Protective relays by IEEE device # |  | SMRT410 and 410D three channels | SMRT410 and 410D four channels |
|------------------------------------|--|---------------------------------|--------------------------------|
| 2                                  | Time delay                                 | ■                               | ■                              |
| 21                                 | Distance single-phase                      | ■                               | ■                              |
| 21                                 | Distance three-phase open delta            | ■                               | ■                              |
| 21                                 | Distance three-phase wye                   | ■                               | ■                              |
| 24                                 | Volts/Hz                                   | ■                               | ■                              |
| 25                                 | Synchronising                              | ■                               | ■                              |
| 27/59                              | Under/over voltage                         | ■                               | ■                              |
| 32                                 | Directional power single-phase             | ■                               | ■                              |
| 32                                 | Directional power three-phase (open delta) | ■                               | ■                              |
| 37/76                              | DC under/over voltage/current              | ■                               | ■                              |
| 40                                 | Loss of field                              | ■                               | ■                              |
| 46                                 | Phase balance current                      | ■                               | ■                              |
| 46N                                | Negative sequence overcurrent              | ■                               | ■                              |
| 47                                 | Phase sequence voltage (open delta)        | ■                               | ■                              |
| 50                                 | Instantaneous overcurrent                  | Up to 225 A                     | Up to 300 A                    |
| 51                                 | Time delay overcurrent                     | Up to 111 A                     | Up to 148 A                    |
| 55                                 | Power factor                               | ■                               | ■                              |
| 60                                 | Voltage/current balance (open delta)       | ■                               | ■                              |
| 67                                 | Directional overcurrent                    | ■                               | ■                              |
| 67N                                | Ground directional overcurrent             | ■                               | ■                              |
| 78                                 | Out of step                                | ■                               | ■                              |
| 79                                 | Reclosing                                  | ■                               | ■                              |
| 81                                 | Frequency                                  | ■                               | ■                              |
| 85                                 | Carrier or pilot wire                      | ■                               | ■                              |
| 87                                 | Differential                               | ■                               | ■                              |
| 91                                 | Voltage directional (open delta)           | ■                               | ■                              |
| 92                                 | Voltage and power directional (open delta) | ■                               | ■                              |
| 94                                 | Tripping                                   | ■                               | ■                              |

## MANUAL OPERATION

RTMS in conjunction with the Smart Touch View Interface™ (STVI) touch screen allows the user to perform manual, steady-state, and dynamic testing quickly and easily. Ergonomically designed with the control knob, and the touch screen, and the powerful RTMS is extremely easy to use.



Figure 1: SMRT410 unit with STVI

The most significant feature of RTMS is its ability to provide the user with a very simple way to manually test, for both commissioning and maintenance, from the simple overcurrent relay to the most complex relays manufactured today. Manual operation is simplified using a built-in computer operating system and the touch screen. The STVI controller and RTMS eliminates the need for a computer when testing virtually all types of relays. Enhanced graphics, intuitive menu screens, and touch screen icon buttons are provided to select the desired test function quickly and easily.

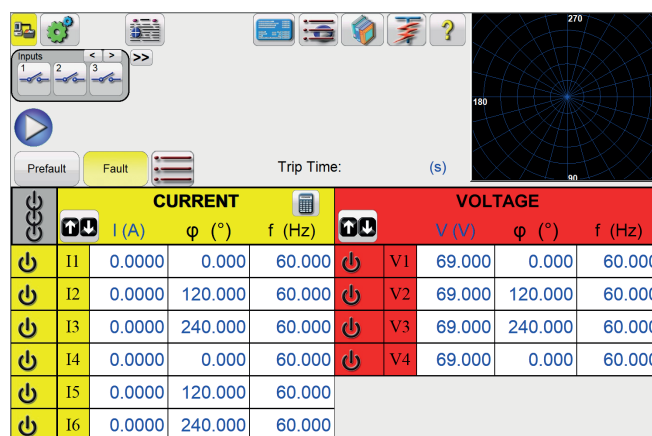


Figure 2: STVI advanced user interface

For more details on RTMS test capability see the RTMS datasheet.

## FEATURES AND BENEFITS

**STVI and integrated onboard display with large color TFT LCD touch-screen** – Easy to use and read (even in direct sunlight) display provides manual control of the test set. Color contrasts accentuate vital information. This reduces human error and time in testing relays.

# SMRT410 and 410D

## Multi-Phase Relay Test System



**Constant power output** – The current amplifier delivers maximum compliance voltage to the load constantly during the test, and range changing is done automatically under load. This ensures better test results and saves time by not having to turn the outputs off to change ranges. Constant power output in many cases eliminates the need to parallel and/or series current channels together to test high burden relays, which also saves time.

**High output current** – The SMRT410 and 410D provides up to 32 A at 200 VA per phase continuous, or up to 60 A at 319 VA with a 1.5 second duty cycle. Three current amplifiers can be paralleled to provide a maximum of 180 A at 957 VA for testing all instantaneous overcurrent relays.

**PowerV™ Voltage Amplifier high power output** – The SMRT410 and 410D provides a high VA output on the voltage channel at the lower critical test voltages (from 30 to 150 V). Users, who want to test a panel of relays at one time, or certain older electromechanical impedance relays, find it impossible using lower VA rated voltage amplifiers. The high burden voltage option in the SMRT when enabled allows the unit to output up to 1 A at 300 V.

**STVI and onboard display high resolution and accuracy** – Metered outputs and timer provides extremely high accuracy. With metered outputs, what you see is what you get.

**RTMS graphics and intuitive navigation** – New test graphics and intuitive screen navigation saves test time and reduces human error.

**STVI internal memory** – Provides storage of test set-up screens and test reports, which reduces testing time and paperwork.

**Steady-State and Dynamic test capability** – The SMRT410 and 410D provides, either through manual control or computer control, both steady-state and dynamic testing of protective relays. This includes programmable waveforms with dc offset and harmonics.

**Digital inputs and outputs** – Up to ten programmable inputs, and six programmable outputs provide timing and logic operations in real-time with the output voltage and currents. Binary Inputs can be programmed, using Boolean logic, for more complex power system simulations. This provides a low cost, closed loop, power system simulator.

**Circuit breaker simulator** – Binary outputs provide programmable normally closed and normally open contacts to simulate circuit breaker operation for testing reclosing relays. Sequence of operation, timing, and lockout are easily tested.

**Perform transient tests** – The SMRT410 and 410D can perform acceptance or troubleshooting tests by replaying digitally recorded faults, or EMTP/ATP simulations, in the IEEE- C37.111 / IEC 60255-24, COMTRADE Standard format.

**Perform end-to-end tests** – Using the RTMS Sequencer test; with a Megger MGTR GPS satellite receiver (or suitable IRIG-B time code source input into Binary Input # 1), the SMRT410 and 410P performs satellite-synchronised end-to-end tests.

**Perform multi-phase tests** – The SMRT410 and 410D can be interconnected with the SMRT1 single phase unit (or other SMRT units) to increase the total number of test currents for testing multi-phase bus differential protection schemes. For example, a five channel SMRT410 may be interconnected with two more SMRT410 units, providing up to a maximum of thirty current channels.

**Three Ethernet ports SMRT410** – PC/OUT Ethernet port is the primary PC connection port. The IN/IEC61850 Ethernet port provides interface to multiple SMRT units and may be used to connect to the IEC 61850 substation bus. The OUT Ethernet port is primarily used to interconnect multiple SMRT units together for synchronous multi-unit operation. The STVI PoE (Power over Ethernet) port is used to connect to the STVI.

**Three Ethernet ports SMRT410D** – The PC IN port is the primary PC connection port. The OUT ethernet port is primarily used to interconnect multiple SMRT units together for synchronous multi-unit operation may be used to connect to the IEC 61850 substation bus. The ISOLATED ethernet port provides secure isolation when testing IEC 61850 devices (for customers who require secure isolation from their IEC 61850 substation bus).

**Immediate error indication** – Audible and visual alarms indicate when amplitude or waveforms of the outputs are in error due to short circuit, open circuit, or thermal overload.

**IEC 61850 and Megger GOOSE Configurator** – With the IEC 61850 GOOSE option enabled in the SMRT hardware the Megger GOOSE Configurator (MGC) provides mapping of the binary inputs and outputs of the SMRT test set to the desired GOOSE messages. The GOOSE messages are read from available SCL (Substation Configuration Language) files or may be automatically detected by scanning the substation network in search of available published GOOSE messages. This scanning process is known as GOOSE "sniffing". The MGC also provides advanced network troubleshooting tasks such as comparing the GOOSE messages available on the network with the GOOSE messages described in the SCL files with GOOSE MERGE/COMPARE functionality; this is also a powerful tool for validating the horizontal communication description (GOOSE) in the supplied SCD file at Factory Acceptance Tests (FAT) in IEC 61850 substations. This type of verification is also known as GOOSE Consistency Check.

### IEC 61850 9-2 LE and Megger Sampled Values Analyser (SVA)

– With IEC 61850 9-2 LE Sampled Values option enabled in the SMRT hardware Sampled Values Analyser (SVA) is used as a testing tool that provides the ability to configure a maximum of three Sampled Value (SV) streams compliant with first edition of IEC 61850 9-2 LE to be used in process bus applications for digital substations. As per IEC 61850 9-2 LE guidelines, SMRT can provide three SV data streams with 4 voltages and 4 currents on each stream. Sampled Values (SV) are used for transmitting digitized values of currents and voltages on ethernet frames using a publisher/subscriber mechanism. In a digital substation environment, merging units are typically used to convert analogue signals from current and voltage transformers into digital streams of data packets at 80 samples per cycle – both for 50 Hz and 60 Hz systems as per IEC 61850 9-2 LE. The merging unit in this scenario acts as an SV publisher. Relays compliant to the protocol can act as an SV subscriber to receive the data packets. Digital signal processors in relays can then process the data measurement and take appropriate actions as per the algorithm. Functional testing of Sampled Values SV-based protective relays with the help of SMRT can be seen as a first step to validate such systems. With the SV-enabled option, SMRT can be used to inject SV streams directly into the relay thereby mimicking merging units. Additionally, SMRT can also be connected to the network and be used as an SV stream monitoring tool. Either of the OUT (PC) or IN ports on SMRT provide the ability to subscribe/publish a maximum of three Sampled Values streams. Minimum hardware requirement to use the IEC 61850 9-2 LE Sampled Values Option – SMRT VIGEN bootloader version >= 1.052 and firmware 6.259 or higher.

# SMRT410 and 410D

## Multi-Phase Relay Test System

# Megger<sup>®</sup>

**Low-level Rogowski mode** – In the Low-level Rogowski mode, the current channels will convert from a current source to a millivolt source. This will allow the current channel to simulate a low-level voltage source from a Rogowski coil. The MLLA will provide filtering of the low-level outputs from the latest version of voltage/current generators in the Megger SMRT series test sets. The MLLA provides the interface from the low-level outputs to the device under test using appropriate interface cables (see MLLA data sheet for ordering and unit compatibility information).

**USB 2.0 interface port** – The USB port provides a PC interface for automated control of the SMRT unit. Also provides secure isolation when testing IEC 61850 devices (for customers who require secure isolation from their IEC 61850 substation bus).

**Low-level output capability** – The current generators can provide very low current outputs ranging from 0 to 50 mA full scale or be enabled to provide a voltage output simulating a Rogowski output. In Rogowski mode the current channel will change from a current source to a voltage source, this will allow the current channel to simulate a low-level voltage source from a Rogowski coil. There are three ranges for the Rogowski outputs, 2, 10 and 40 Volts. In the 50 mA mode the feedback loop will stay on down to test currents as low as 5 mA. This provides test capability for generator anti-motoring and Network relays, which can be set as low as 10 to 7.5 mA.

**Variable voltage threshold** – The variable voltage threshold will either start or stop the Timer. The continuity indicator will glow (application) or not glow (removal) upon the application or removal of either an AC or DC voltage. The programmable voltage threshold is available on binary inputs 1 and 2, with a programmable range from 5 to 150 volts AC/DC.

**Open communication architecture** – The SMRT410 and 410D can be used with third party software for more flexible automated control.

## SPECIFICATIONS<sup>1</sup>

### Input power

90 to 264 Volts AC, 1Ø, 50/60 Hz, 1800 VA.

### Outputs

All outputs are independent from sudden changes in line voltage and frequency. All outputs are regulated so changes in load impedance do not affect the output. Each output (VIGEN) module consists of one voltage amplifier, and a current amplifier. The voltage amplifier may be converted to a current source. Therefore, one amplifier module may be used to test single phase current differential relays, including harmonic restraint.

### Output current sources

The SMRT410 and 410D with four VIGEN and one DIGEN (double current) modules can provide up to ten current sources: six high current/high power, and four convertible voltage channels providing lower current/high power. The per channel output current and power ratings are specified in AC RMS values and peak power ratings.

### Per channel output

| Output current     | Power             | Max V      |
|--------------------|-------------------|------------|
| 50 mA <sup>2</sup> | 5 VA              | 10.0 V RMS |
| 1 A                | 15 VA             | 15.0 V RMS |
| 4 A                | 200 VA (282 peak) | 50.0 V RMS |
| 15 A               | 200 VA (282 peak) | 13.4 V RMS |
| 32 A               | 200 VA (282 peak) | 6.67 V RMS |
| 60 A               | 319 VA (450 peak) | 5.00 V RMS |

DC 200 Watts

**Duty cycle:** 32 A Continuous, 60 A for  $\pm 1.5$  seconds or 90 cycles

### Three currents channels in parallel

| Output current | Power              | Max V      |
|----------------|--------------------|------------|
| 12 A           | 600 VA (848 peak)  | 50.0 V RMS |
| 45 A           | 600 VA (848 peak)  | 13.4 V RMS |
| 96 A           | 600 VA (848 peak)  | 6.67 V RMS |
| 180 A          | 957 VA (1350 peak) | 5.00 V RMS |

### Four currents channels in parallel

| Output current | Power               | Max V      |
|----------------|---------------------|------------|
| 16 A           | 800 VA (1132 peak)  | 50.0 V RMS |
| 60 A           | 800 VA (1132 peak)  | 13.4 V RMS |
| 128 A          | 800 VA (1132 peak)  | 6.67 V RMS |
| 240 A          | 1276 VA (1800 peak) | 5.00 V RMS |

### AC Low-level Rogowski output (converted current channels)<sup>2/3</sup>

Each current channel can provide the following voltage outputs with the following Ranges:

| Output voltage | Max I  |
|----------------|--------|
| 0 - 2 V RMS    | 10 mA  |
| 0 - 10 V RMS   | 100 mA |
| 0 - 40 V RMS   | 25 mA  |

**Duty cycle:** Continuous

### Two current channels in series

With two current channels in series, the compliance voltage doubles to provide 4 A at 100 V RMS and up to 32 A at 12.5 V RMS.

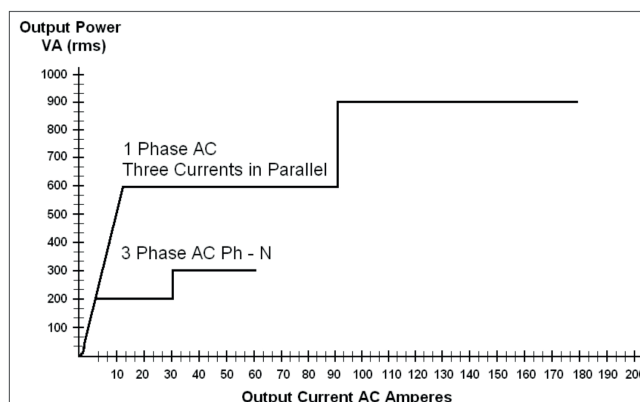


Figure 3: Current output power curve

### Current amplifier – extended power range

The SMRT410 and 410D's current amplifier provides a unique flat power curve from 4 to 32 A per phase to permit testing of electromechanical high impedance relays, and other high burden applications, with an extended operating range up to 60 A at 319 VA RMS for short durations.



# SMRT410 and 410D

## Multi-Phase Relay Test System



### AC voltage output

The SMRT410 and 410D can provide four voltage sources 0 – 300 V AC/DC.

Outputs are rated with the following ranges:

| Output voltage   | Power   | Max I                 |
|------------------|---------|-----------------------|
| 2 V <sup>2</sup> | 0.02 VA | 10 mA                 |
| 30 V             | 150 VA  | 5 A                   |
| 150 V            | 150 VA  | Variable <sup>4</sup> |
| 300 V            | 150 VA  | 0.5 A                 |

DC 150 Watts

**Duty cycle:** Continuous

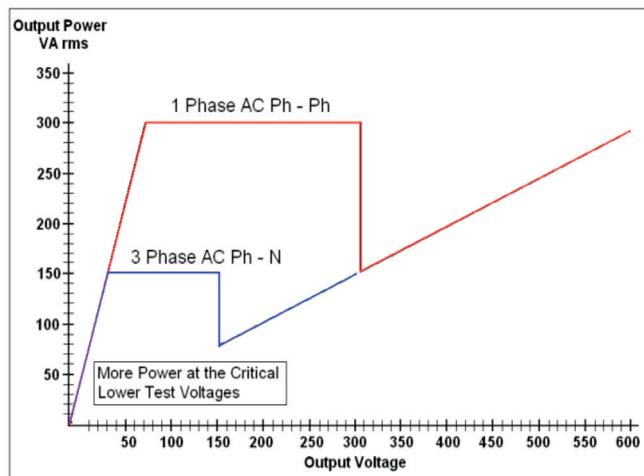


Figure 4: Voltage output power curve

### "PowerV™" voltage amplifier - extended power range

The SMRT410 and 410D's voltage amplifier provides a flat power curve from 30 to 150 V in the 150V range to permit testing of high current applications such as panel testing, and older electromechanical distance relays which demand a higher power voltage source to properly test.

### Voltage amplifier in current mode

The voltage channels are convertible to a current source with the following output capability. Output power ratings are specified in AC RMS values and peak power ratings.

| Output current | Power             | Max V      |
|----------------|-------------------|------------|
| 5 A            | 150 VA (212 peak) | 30.0 V RMS |
| 15 A           | 120 VA            | 8.0 V RMS  |

**Duty cycle:** 5 A Continuous, 15 A for  $\pm 1.5$  seconds or 90 cycles

### Phase angle

#### Ranges

0.00 to 359.99 degrees, counterclockwise, or clockwise rotation, or 0.00 to  $\pm 180.00$  degrees

**Resolution:** 0.001

**Accuracy:**  $\pm 0.02^\circ$  typical,  $< 0.1^\circ$  guaranteed at 50/60 Hz

### Frequency

The output modules provide a variable frequency output with the following ranges and accuracy.

#### Ranges

DC: 0.001 to 1000.000 Hz

Output amplifiers can provide transient signals with a range of DC to 10 kHz for transient playback using IEEE-C37.111 Standard COMTRADE files.

**Resolution:** 0.001 Hz

**Frequency accuracy:** 2.5 ppm typical

25 ppm, 0 to 50° C, at 50/60 Hz maximum

AC/DC AUX: 250 ppm, 50/60 Hz maximum

### Total harmonic distortion

Less than 0.1 % typical, 2 % maximum at 50/60 Hz

### Metering

Measured output quantities such as AC amperes, AC volts, DC volts or DC amperes, and Time may be simultaneously displayed on the touch screen. Preset AC and DC outputs display the approximate voltage/current output prior to initiation. This provides a fast, easy method for preset of outputs. Other values that may be displayed, depending on which test screen is in view, are phase angle, frequency, Ohms, Watts, VA, and Power Factor. Accuracies are specified from 10 to 100 % of range, 25 °C  $\pm 5$  °C, 50-60 Hz.

### AC voltage amplitude

**Accuracy:**  $\pm 0.05$  % reading + 0.02 % range typical  
 $\pm 0.15$  % reading + 0.05 % range maximum

**Resolution:** 0.01

**Measurements:** AC RMS

**Ranges:** 30, 150, 300 V

### DC voltage amplitude

**Accuracy:** 0.1 % range typical, 0.25 % range maximum

**Resolution:** 0.01

**Measurements:** RMS

**Ranges:** 30, 150, 300 V

### AC low-level voltage output<sup>2</sup>

**Range:** 2 V

**Accuracy:** 0 – 1 V: 0.5 mV typical and 1 mV guaranteed  
 1 – 2 V: 0.5 mV typical and 2 mV guaranteed

**Resolution:** 0.001

**Measurements:** AC RMS

### AC low-level Rogowski output (converted current channels)<sup>2/3</sup>

**Range:** 2 V

**Accuracy:** 0 – 1 V: 0.5 mV typical and 1 mV guaranteed  
 1 – 2 V: 0.5 mV typical and 2 mV guaranteed

**Resolution:** 0.001

**Measurements:** AC RMS

**Ranges:** 10, 40 V

**Accuracy:**  $\pm 0.05$  % of reading + 0.02 % of range typical  
 $\pm 0.15$  % of reading + 0.05 % of range guaranteed

**Resolution:** 0.001

**Measurements:** AC RMS

# SMRT410 and 410D

## Multi-Phase Relay Test System



### AC low-level voltage output (with MLLA adapter)

**Range:** 2 V, 30 V  
**Accuracy:** 0 – 1 V: 0.5 mV typical and 1 mV guaranteed  
>1 V: 0.5 mV typical and 2 mV guaranteed  
**Resolution:** 0.001  
**Measurements:** AC RMS

### AC current amplitude

**Accuracy:**  $\pm 0.05$  % reading + 0.02 % range typical  
 $\pm 0.15$  % reading + 0.05 % range maximum  
**Resolution:** 0.001/0.01  
**Measurements:** AC RMS  
**Ranges:** 32, 60 A

### AC low current<sup>2</sup>

**Range:** 50 mA  
**Accuracy:**  $\pm 0.5$  mA typical and 1 mA guaranteed  
**Resolution:** 0.0001  
**Measurements:** AC RMS

### DC current amplitude

**Accuracy:**  $\pm 0.05$  % reading + 0.02 % range typical  
 $\pm 0.15$  % reading + 0.05 % range maximum  
**Resolution:** 0.001/0.01  
**Measurements:** RMS  
**Range:** 30 A

### Convertible source in AC current mode

**Accuracy:**  $\pm 0.05$  % reading + 0.02 % range typical  
 $\pm 0.15$  % reading + 0.05 % range or  $\pm 12.5$  mA whichever is greater  
**Resolution:** 0.001  
**Measurements:** AC RMS  
**Ranges:** 5, 15 A

### Battery Simulator

When the AUX voltage channel is used as a battery simulator there are four common voltage level selections to choose from, 24, 48, 125 & 250 V or a variable DC output ranging from 5 – 250 V at 100 W, 4 A max, providing capability to power up relays with redundant power supplies.

| Ranges (DC) | Power     | Max I  |
|-------------|-----------|--------|
| 30 V        | 100 Watts | 3.33 A |
| 250 V       | 100 Watts | 0.4 A  |

**DC Accuracy:** Typical < 1%, Guaranteed < 5%  $\pm 1$  V

The Battery Simulator is Galvanically Isolated from other outputs and protected against short circuit and overload conditions.

### Timer

The timer-monitor Input is designed to monitor and time-tag inputs, like a sequence of events recorder. In addition, the binary input controls enable the user to perform logic AND/OR functions, and conditionally control the binary output relay to simulate circuit breaker, trip, reclose and carrier control operation in real-time. The Timer function displays in Seconds or Cycles, with the following range and resolution:

**Seconds:** 0.0001 to 99999.9 (Auto ranging)  
**Cycles:** 0.01 to 99999.9 (Auto ranging)  
 $\pm 0.001$  % of reading, typical  
 $\pm 2$  least significant digit  
 $\pm 0.005$  % of reading from 0 to 50 °C maximum

### Binary input – start/stop/monitor gate

Up to 10 Independent, galvanically isolated inputs monitor operation of relay contacts or trip SCR, continuity light is provided for the input gate. Upon sensing continuity, the lamp will glow. In addition to serving as wet/dry contacts the Binary Inputs may be programmed to trigger binary output sequence(s).

**Input rating:** Up to 300 V AC/DC

**Variable voltage threshold:**

**Range:** 5 – 150 V AC/DC

**Accuracy:** 5 – 30 V,  $\pm 3$  V

31 – 150 V,  $\pm 6$  V

### Binary output relays

SMRT410 and 410D has independent, galvanically isolated, output relay contacts to accurately simulate relay or power system inputs to completely test relays removed from the power system. The binary output simulates normally open, or normally closed, contacts for testing breaker failure schemes. The binary output can be configured to change state based on binary input logic.

### High current output relays 1 to 4:

**AC rating:** 400 V max., I max: 8 A, 2000 VA max.

**DC rating:** 300 V max., I max: 8 A, 80 W

**Response time:** < 10 ms

### High speed output relays 5 and 6:

**AC/DC rating:** 400 V peak, I max: 1 A

**Response time:** < 1 ms typical

### Waveform storage

Each output channel can store waveforms for playback on command. End-to-end playback of stored waveforms is possible, when triggered externally by a GPS receiver. Each channel can store up to 256,000 samples.

### Protection

Voltage outputs are protected from short circuits and prolonged overloads. Current outputs are protected against open circuits and overloads.

### DC IN inputs (optional transducer feature)

#### DC IN voltage

**Range:** 0 to  $\pm 10$  V DC

**Accuracy:**  $\pm 0.001$  % reading + 0.005 % range typical  
 $\pm 0.003$  % reading + 0.02 % range max

**Resolution:** 0.001

**Measurements:** Average

#### DC IN Amperes

**Ranges:** 0 to  $\pm 1$  mA DC

4 to  $\pm 20$  mA DC

**Accuracy:**  $\pm 0.001$  % reading + 0.005 % range typical  
 $\pm 0.003$  % reading + 0.02 % range max

**Resolution:** 0.001

**Measurements:** Average

### Environmental

**Operating temperature:** 32 to 122 °F (0 to 50 °C)

**Storage temperature:** -13 to 158 °F (-25 to 70 °C)

**Relative humidity:** 5 – 95 % RH, non-condensing

# SMRT410 and 410D

## Multi-Phase Relay Test System



### Conformance standards

|                      |                   |
|----------------------|-------------------|
| <b>Safety:</b>       | EN 61010-1        |
| <b>Shock:</b>        | EN/IEC 60068-2-27 |
| <b>Vibration:</b>    | EN/IEC 60068-2-6  |
| <b>Transit drop:</b> | ISTA 1A           |
| <b>Free fall:</b>    | EN/IEC 60068-2-32 |
| <b>Drop/topple:</b>  | EN/IEC 60068-2-31 |

### Electromagnetic compatibility

|                   |  |
|-------------------|--|
| <b>Emissions:</b> | EN 61326-2-1, EN 61000-3-2/3, FCC Subpart B of Part 15 Class A |
| <b>Immunity:</b>  | EN 61000-4-2/3/4/5/6/8/11                                      |

### Weight

#### SMRT410

39.5 lb. (17.76 kg) – lid on  
36.5 lb. (16.4 kg) – lid off

#### SMRT410D

42.65 lb. (19.2 kg)

### Dimensions

#### SMRT410

##### With lid off:

14.2 W x 7.6 H x 16.25 D in.  
360 W x 194 H x 413 D mm

##### With lid on:

14.2 W x 7.2 H x 16.25 D in.  
360 W x 180 H x 413 D mm

#### SMRT410D

13.25 W x 6.75 H x 15 D in.  
337 W x 172 H x 381 D mm

### Enclosure and transit cases

**SMRT410** - The unit comes mounted in a rugged fiberglass reinforced plastic enclosure for field portability.

**SMRT410D** - The unit comes mounted in a rugged metal enclosure for field portability.

#### IEC enclosure rating: IP30

Optional hard-sided transit case is available for the SMRT410 and 410D. The robust design of the optional hard-sided transit case provides protection when transporting the unit over rugged terrain and long distances. An optional soft-sided carry case for the SMRT410D protects the unit from light rain and dust. The padded sides provide moderate protection while in transit.

**Megger**<sup>®</sup>

## STYLE NUMBER IDENTIFICATION



- **A** option – NEMA 5-15 to IEC60320 C13 connectors, UL and CSA approved for countries with NEMA outlets.
- **I** option – International colour-coded wires (light blue, brown, and green with yellow stripe) insulation jacket stripped ready for male connector with IEC 60320 C13 connector. CE marked.
- **E** option – CEE 7/7 “Schuko” plug to IEC 60320 C13 connector is CE marked.
- **U** option – United Kingdom power cord with IEC 60320 C13 connector, and 13 A fuse. BS 1363 / CE marked.



# SMRT410 and 410D Multi-Phase Relay Test System



## Internal software option:

- 0** = Enter the number **0** for the unit to be supplied with the RTMS Standard option.
- 1** = Enter the number **1** for the unit to be supplied with the IEC 61850 GOOSE hardware license enabled on the unit.
- 2** = Enter the number **2** for the unit to be supplied with the IEC 61850 9-2 LE hardware license enabled on the unit.
- 3** = Enter the number **3** for the unit to supplied with the RTMS Enhanced option.
- 4** = Enter the number **4** for the unit to be supplied with both RTMS Enhanced and IEC 61850 GOOSE hardware licenses enabled.
- 5** = Enter the number **5** for the unit to be supplied with RTMS Enhanced, IEC 61850 GOOSE and IEC 61850 9-2 LE hardware licenses enabled.
- 6** = Enter the number **6** for the unit to be supplied with IEC 61850 GOOSE and IEC 61850 9-2 LE hardware licenses enabled.

## Enclosure option: **S** = Standard unit. **T** = With transducer test

capability enabled (requires 3 channel configuration). When equipped with the transducer test feature the total number of binary inputs and outputs are reduced by 1.

**Test leads option:** Enter the number **1** for the unit to be supplied with test leads. Enter **0** for the unit without test leads.

## DESCRIPTION OF SOFTWARE OPTIONS

| Included software  | Part Number |
|--|-------------|
| RTMS Standard application  | 84978       |
| <b>Optional software</b>   |             |
| Megger GOOSE Configurator and Sampled Values Analyser stand-alone software   | 1007-246    |
| RTMS Enhanced upgrade kit  | 84973       |
| IEC 61850 GOOSE hardware upgrade kit   | 83646       |
| IEC 61850-9-2LE Sampled Values hardware upgrade kit  | 88695       |
| SMRT IEC 61850 GOOSE and IEC 61850-9-2LE Sampled Values hardware upgrade kit   | 88696       |
| Low-level hardware upgrade kit (includes Rogowski, low-current and variable voltage on B/I 1 and 2 feature) <sup>2/3</sup> | 87416       |

## DESCRIPTIONS OF SOFTWARE

### Included software

Every unit is supplied with Relay Test Management Software (RTMS) for installing on a PC. The software does not require a security dongle or license to operate and can be loaded on as many customer-owned computers as required. The powerful RTMS can be run directly from a PC providing both manual and automatic test capabilities. See the RTMS datasheet for more detailed descriptions of test features and capabilities.

**RTMS Template Manager** – RTMS Template Manager is included with RTMS, allowing users to download new versions of relay templates as they are released from the Megger Cloud and will update the user's local PC data base (Internet connection is required). RTMS Template Manager also provides documents and how-to videos to support relay testing.

**Megger GOOSE Configurator software** – The SMRT unit is certified by KEMA as being compliant with IEC 61850 protocol. With the IEC 61850 GOOSE hardware enabled, in conjunction with the Megger GOOSE Configurator (MGC) software, the SMRT unit can be used in the testing or commissioning of IEC 61850 compliant devices. See RTMS datasheet for details.

| GOOSE Substation  | GOOSE Publication | Test                     |
|---|-------------------|--------------------------|
| IEC GOOSE[MG]_TRAC[TRALL]NBRGONControl_Datase[01-0C-01-00-00] | BOUT 1,2          | Alt (False) DS (T O F 2) |
| IEC[0]  |                   |                          |
| Attributes[12]  |                   |                          |
| DataSet[0]  |                   |                          |
| (1) BOOLEAN (CTRL.GGO1.ST.SP0S01.aVal)                        | -No Mapping-      | BOUT 1                   |
| (2) BITSTRING (CTRL.GGO1.ST.SP0S01.q.length.13)               | -No Mapping-      | BOUT 2                   |
| (3) BOOLEAN (CTRL.GGO1.ST.SP0S05.aVal)                        | -No Mapping-      |                          |
| (4) BITSTRING (CTRL.GGO1.ST.SP0S05.q.length.13)               | -No Mapping-      |                          |
| IEC GOOSE[AA181001A1L00LLNBRGONZONE1_TRIP][01-0C-01-00-00]    | BIN 1,2,3         | Alt (False) DS (T O F 1) |
| IEC[0]  |                   |                          |
| Attributes[12]  |                   |                          |
| DataSet[0]  |                   |                          |
| (1) BOOLEAN (LD0.ZKPOS1.ST.Op.general)                        | BIN 1             | -No Mapping-             |
| (2) BOOLEAN (LD0.ZKPOS1.ST.Op.phaA)                           | BIN 2             | -No Mapping-             |
| (3) BOOLEAN (LD0.ZKPOS1.ST.Op.phaB)                           | BIN 3             | -No Mapping-             |
| (4) BOOLEAN (LD0.ZKPOS1.ST.Op.phaC)                           | BIN 4             | -No Mapping-             |
| (5) BITSTRING (LD0.ZKPOS1.ST.Op.q.length.13)                  |                   |                          |
| (6) UTC (LD0.ZKPOS1.ST.Op.t)                                  |                   | -No Mapping-             |
| IEC GOOSE[MGCOM_875]systemLLNBRGON[01-0C-01-00-00]            |                   | Alt (False) DS (T O F 4) |

Figure 5: Megger GOOSE Configurator software

# SMRT410 and 410D Multi-Phase Relay Test System



**Megger Sampled Values Analyser software** – The SMRT unit is certified by KEMA as being compliant with IEC61850-9-2LE guidelines. With the IEC 61850 Sampled Values hardware enabled, in conjunction with the Megger Sampled Values Analyser software, the SMRT unit is user configurable to provide Sampled Values for testing or commissioning devices which require Sampled Values. When configured, the SMRT unit can provide three data streams of four voltages and four currents each.

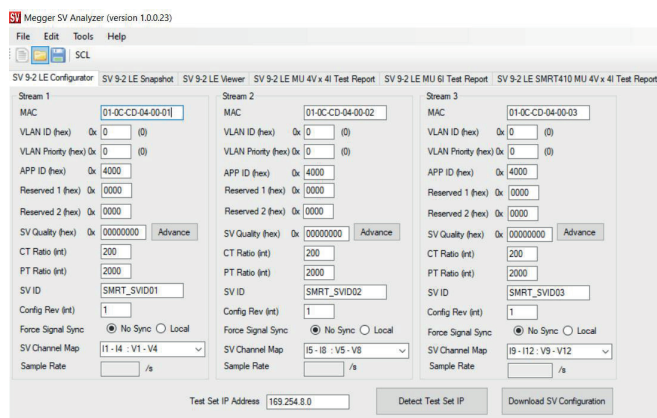


Figure 6: Megger Sampled Values Configurator

## Additional optional software

**RTMS Enhanced upgrade kit** – RTMS has two different levels, Standard and Enhanced, see the RTMS datasheet for details regarding features and capabilities of each level. The Enhanced level is hardware enabled. When using RTMS, if the Enhanced feature is enabled in the SMRT unit, the software will automatically recognize this and allow access to the Enhanced test features. The Enhanced feature can be enabled by the customer in the field by purchasing the RTMS Enhanced upgrade kit, part number 84973. The kit will include a RTMS Enhanced license certificate, with a unique 32-digit code number assigned specifically to the unit (requires the customer to provide the unit serial number when ordering the kit). The kit will also include step-by-step instructions on how to enable the feature with the 32-digit code.

**SMRT IEC 61850 GOOSE license upgrade kit** – The IEC 61850 GOOSE test feature is a hardware enabled option. RTMS will automatically recognize if the GOOSE feature is enabled in the SMRT. There are two ways to determine if the unit has the IEC 61850 test capability enabled: First there is nameplate or a sticker on the back of the unit that will state "IEC 61850 ENABLED". The second way to determine if the unit has been enabled is to power up the unit and go to the Configuration Screen in RTMS and it will either state IEC 61850 ENABLED or DISABLED. The IEC 61850 GOOSE test feature can be enabled by the customer in the field by purchasing the IEC 61850 GOOSE license upgrade kit, part number 83646. The kit will include an IEC 61850 GOOSE license certificate, with a unique 32-digit code number assigned specifically to the unit (requires the customer to provide the unit serial number when ordering the kit). The kit also includes step-by-step instructions on how to enable the feature with the 32-digit code.

**SMRT IEC 61850 Sampled Values license upgrade kit** – The IEC 61850-9-2LE Sampled Values test feature is a hardware enabled option. The IEC 61850-9-2LE Sampled Values test feature can be enabled by the customer in the field by purchasing the SMRT IEC 61850-9-2LE Sampled Values License Upgrade Kit, part number 88695. The kit will include an IEC 61850-9-2LE Sampled Values License Certificate, with a unique 32-digit code number assigned specifically to the unit (requires the customer to provide the unit serial number when ordering the kit). The kit also includes step-by-step instructions on how to enable the feature with the 32-digit code.

**SMRT IEC 61850 GOOSE and IEC 61850-9-2LE Sampled Values hardware upgrade kit** – The IEC 61850 GOOSE and IEC 61850-9-2LE Sampled Values test feature is a hardware enabled option. The IEC 61850 GOOSE and IEC 61850-9-2LE Sampled Values test feature can be enabled by the customer in the field by purchasing the IEC 61850 GOOSE and SMRT IEC 61850-9-2LE Sampled Values hardware upgrade kit, part number 88696. The kit will include IEC 61850 GOOSE and IEC 61850-9-2LE Sampled Values license certificates, with unique 32-digit code numbers assigned specifically to the unit (requires the customer to provide the unit serial number when ordering the kit). The kit also includes step-by-step instructions on how to enable these features with the 32-digit code.

## TEST LEADS AND ACCESSORIES

All units are supplied with a power cord, an Ethernet communication cable, and instruction manual on a USB thumb-drive.








| Included standard accessories  | Part number |
|--|-------------|
| Power Cord - Depending on the style number, the unit will be supplied with one of the following: |             |
| Line cord, North American  | 620000      |
| Line cord, Continental Europe with CEE 7/7 Schuko Plug   | 50425       |
| Line cord, International colour-coded wire   | 15065       |
| Line cord, United Kingdom  | 90002-989   |
| Ethernet cable for interconnection to PC, 210cm (7 ft.) long (Qty. 1 ea.)                        | 90003-684   |
| Instruction manual USB   | 80989       |

# SMRT410 and 410D Multi-Phase Relay Test System





## TABLE OF ACCESSORIES

Test leads and accessories are supplied with the selection of the test leads option for a typical configuration as follows: SMRT410-41P0F0I0S1. With the test leads option, the number and type of leads varies depending on the unit that is ordered. Test leads and accessories can be ordered individually, see part numbers below.

|   | Descriptions of test leads and accessories  | Quantity | Part number |
|---|---|----------|-------------|
|    | <b>Accessory carry case:</b> Used to carry power cord, ethernet cable, optional STVI, test leads and accessories.   | 1        | 2003-725    |
|    | <b>Sleeved pair of test leads:</b> Sleeved test leads, one <b>red</b> , one <b>black</b> , 200 cm (78.7 in) long, 600 V, 32 A CAT II  | 2        | 2008-539-2  |
|    | <b>Cable/spade lug adapter (small):</b> Small lug fit most new relay small terminal blocks. Lug adapter, <b>red</b> , 4.1 mm, rated up to 1000 V/20 A CAT II  | 14       | 684004      |
|    | <b>Cable/spade lug adapter (small):</b> Small lug fit most new relay small terminal blocks. Lug adapter, <b>black</b> , 4.1 mm, rated up to 1000 V/20 A CAT II  | 14       | 684005      |
|    | <b>Jumper lead:</b> Jumper lead, <b>black</b> , 12.5 cm (5 in) long, use with voltage/current outputs, 600 V, 32 A CAT II   | 6        | 2001-573    |
|   | <b>Sleeved combination voltage test leads:</b> Three common leads connect to the test set, which are interconnected to one black common to connect to the relay. Sleeved, three <b>red</b> and <b>black</b> , 200 cm (78.7 in) long, 600 V, 32 A CAT II | 1        | 2008-540-2  |
|  | <b>Sleeved combination current test leads:</b> Three pairs of leads connect to the test set, and to the relay under test. Sleeved, three <b>red</b> and <b>black</b> , 200 cm (78.7 in) long, 600 V, 32 A CAT II  | 1        | 2008-541-2  |

## ADDITIONAL TEST LEADS AND ACCESSORIES (TRANSDUCER OPTION)

The following additional test leads, and accessories are supplied with the selection of the **Transducer option**. Test leads and accessories can be ordered individually, see part numbers and descriptions below.




|   | Descriptions of optional test leads and accessories   | Quantity | Part number |
|---|---|----------|-------------|
|  | <b>Cable/spade lug adapter (small):</b> Small lug fit most new relay small terminal blocks. Lug adapter, <b>red</b> , 4.1 mm, rated up to 1000 V/ 20 A CAT II   | 2        | 684004      |
|  | <b>Cable/spade lug adapter (small):</b> Small lug fit most new relay small terminal blocks. Lug adapter, <b>black</b> , 4.1 mm, rated up to 1000 V/ 20 A CAT II | 2        | 684005      |

# SMRT410 and 410D Multi-Phase Relay Test System










## ADDITIONAL TEST LEADS AND ACCESSORIES (DIGEN OPTION)

The following additional test leads, and accessories are supplied with the selection of the **DIGEN option**. Test leads and accessories can be ordered individually, see part numbers and descriptions below.

|   | Descriptions of optional test leads and accessories   | Quantity | Part number |
|---|---|----------|-------------|
|  | <b>Sleeved pair of test leads:</b> Sleeved test leads, one <b>red</b> , one <b>black</b> , 200 cm (78.7 in) long, 600 V, 32 A CAT II.                           | 2        | 2008-539-2  |
|  | <b>Cable/spade lug adapter (small):</b> Small lug fit most new relay small terminal blocks. Lug adapter, <b>red</b> , 4.1 mm, rated up to 1000 V/ 20 A CAT II   | 2        | 684004      |
|  | <b>Cable/spade lug adapter (small):</b> Small lug fit most new relay small terminal blocks. Lug adapter, <b>black</b> , 4.1 mm, rated up to 1000 V/ 20 A CAT II | 2        | 684005      |

## OPTIONAL TEST LEADS AND ACCESSORIES (NOT INCLUDED IN THE SMRT410 AND 410D TEST LEAD OPTION)

Optional test leads and accessories can be ordered individually, see description and part numbers below. **The following accessories and part numbers are in quantities of 1 each. Order the appropriate number required.**

|   | Descriptions of optional test leads and accessories   | Quantity | Part number |
|---|---|----------|-------------|
|   | <b>Sleeved pair of test leads:</b> Sleeved test leads, one <b>red</b> , one <b>black</b> , 300 cm (118.11 in) long, 600 V, 32 A CAT II.   | 1        | 2008-539-3  |
|  | <b>Sleeved combination voltage test leads:</b> Three common leads connect to the test set, which are interconnected to one black common to connect to the relay. Sleeved, three <b>red</b> and <b>black</b> , 300 cm (118.11 in) long, 600 V, 32 A CAT II | 1        | 2008-540-3  |
|  | <b>Sleeved combination current test leads:</b> Three pairs of leads connect to the test set, and to the relay under test. Sleeved, three <b>red</b> and <b>black</b> , 300 cm (118.11 in) long, 600 V, 32 A CAT II  | 1        | 2008-541-3  |
|  | <b>Sleeved pair of test leads:</b> Sleeved test leads, one <b>red</b> , one <b>black</b> , 600 cm (236.22 in) long, 600 V, 32 A CAT II.   | 1        | 2008-539-6  |
|  | <b>Sleeved combination voltage test leads:</b> Three common leads connect to the test set, which are interconnected to one black common to connect to the relay. Sleeved, three <b>red</b> and <b>black</b> , 600 cm (236.22 in) long, 600 V, 32 A CAT II | 1        | 2008-540-6  |
|  | <b>Sleeved combination current test leads:</b> Three pairs of leads connect to the test set, and to the relay under test. Sleeved, three <b>red</b> and <b>black</b> , 600 cm (236.22 in) long, 600 V, 32 A CAT II*                                       | 1        | 2008-541-6  |
|  | <b>Individual (non-sleeved) test leads:</b> Excellent for widely separated individual terminal test connections. Test lead, <b>red</b> , use with voltage/current output, or binary I/O, 200 cm long (78.7 in) 600 V/32 A CAT II.                         | 1        | 620143      |
|   | <b>Individual (non-sleeved) test leads:</b> Excellent for widely separated individual terminal test connections. Test lead, <b>black</b> , use with voltage/current output, or binary I/O, 200 cm long (78.7 in) 600 V/32 A CAT II.                       | 1        | 620144      |

# SMRT410 and 410D Multi-Phase Relay Test System








|  | Descriptions of optional test leads and accessories   | Quantity             | Part number |
|--|---|----------------------|-------------|
|  | <b>Individual (non-sleeved) extra-long test leads:</b> Excellent for widely separated individual terminal test connections. Extra-long test lead, <b>black</b> , use with voltage/current output, or binary I/O, 360 cm long (12 ft) 600 V/ 32 A CAT II.  | 1                    | 2003-172    |
|  | <b>Individual (non-sleeved) extra-long test leads:</b> Excellent for widely separated individual terminal test connections. Extra-long test lead, <b>red</b> , use with voltage/current output, or binary I/O, 360 cm long (12 ft) 600 V/ 32 A CAT II.  | 1                    | 2003-173    |
|  | <b>Cable/spade lug adapter (large):</b> Large spade lug fits older relay terminal blocks, or STATES® Company FTP10 or FTP14 test paddles, ABB, or General Electric test plugs with screw down terminals. Lug adapter, <b>red</b> , 6.2 mm, use with test leads up to 1000 V/20 A CAT II.  | 1                    | 684002      |
|  | <b>Cable/spade lug adapter (large):</b> Large spade lug fits older relay terminal blocks, or STATES® Company FTP10 or FTP14 Test paddles, ABB, or General Electric test plugs with screw down terminals. Lug adapter, <b>black</b> , 6.2 mm, use with test leads up to 1000 V/20 A CAT II.  | 1                    | 684003      |
|  | <b>Alligator/crocodile clip:</b> Excellent for test connections to terminal screws and pins where spade lugs cannot be used. Alligator clip, <b>red</b> , use with test leads up to 1000 V/32 A CAT III.  | 1                    | 684006      |
|  | <b>Alligator/crocodile clip:</b> Excellent for test connections to terminal screws and pins where spade lugs cannot be used. Alligator clip, <b>black</b> , use with test leads up to 1000 V/32 A CAT III.  | 1                    | 684007      |
|  | <b>Flexible test lead adapter with retractable insulated sleeve:</b> Use for connection to old style non-safety sockets with retractable protective sleeve on one end. Retractable sleeve test lead, <b>red</b> , 50 cm (20 in) long, use with test leads up to 600 V/32 A CAT II.  | 1                    | 90024-781   |
|  | <b>Flexible test lead adapter with retractable insulated sleeve:</b> Use for connection to old style non-safety sockets with retractable protective sleeve on one end. Retractable sleeve test lead, <b>black</b> , 50 cm (20 in) long, use with test leads up to 600 V/32 A CAT II.  | 1                    | 90024-780   |
|  | <b>Flexible test lead adapter:</b> Use with rail-mounted terminals or screw clamp connections where spade lugs and crocodile/alligator clips cannot be used. Flexible test lead adapter, <b>black</b> , 1.8 mm male pin, use with test leads up to 1000 V/32 A CAT III.   | 1                    | 90001-845   |
|  | <b>Parallel test lead adapter:</b> Used when paralleling up to three current test leads together to a common test point. Usually used when connecting to a test paddle (like the pictured States Company test paddle.)  | 1                    | 1002-286    |
|  | <b>RLC, Relay Lead Connector:</b> Excellent for easily connecting three-phase voltage and current leads to the test system.<br>Two sets of test leads (one for voltages and one for currents), sleeved, 4 mm (0.16 in) terminals with retractable safety shrouds, colour coded <b>red, yellow, blue, black</b> , 200 cm long (78.7 in) 600 V/ 32 A CAT II   | 1                    | RLC         |
|  | <b>Arc Flash Simulator:</b> The Megger arc flash simulator provides a focused high-intensity bright white light to simulate an arc flash for testing arc flash protection relays and systems.   | 1                    | AFS         |
|  | <b>Megger Low Level Adapter (Set of three filters):</b> The MLLA provides filtering of the low-level outputs from the latest version <sup>2</sup> of voltage/current generators in the Megger SMRT series test sets. It also provides the interface from the low-level outputs to the device under test using appropriate interface cables. <b>For individual filters and interface cables, see the MLLA datasheet.</b> | Set of three filters | MLLA        |
|  | <b>Megger GPS timing reference:</b> The MGTR is a small, lightweight, field portable, GPS satellite receiver system specifically designed to perform end-to-end tests of line protection schemes. The unit comes with a GPS Antenna, power supply, and a stainless-steel antenna mount. Cable length depends on the ordering part number.   |                      |             |
|  | GPS unit with all-weather antenna, power supply, and 15 m cable   | 1                    | MGTR-II-50  |
|  | GPS unit with all-weather antenna, power supply, and 30 m cable   | 1                    | MGTR-II-100 |
|  | <b>STATES® 10-pole test paddle:</b> Use with STATES FMS test switch or ABB FT-1 10-pole test switch.<br>Test paddle features knobs which also serve as insulated Ø 4 mm rigid socket accepting spring loaded Ø 4 mm plugs with rigged insulating sleeve, or retractable sleeve. Use with test leads up to 600 V, 32 A CATII.  | 1                    | V1TP10      |



# SMRT410 and 410D

## Multi-Phase Relay Test System

| Descriptions of optional test leads and accessories                                 |   | Quantity | Part number |
|---|---|----------|-------------|
|    | <b>STATES® 10-pole test paddle attachment:</b> Use with STATES V1TP10 test paddle. The test paddle attachment provides an additional 10 insulated connection points for front connection, as well as the standard top connections for test leads. Adapter can provide convenient parallel test connections of test currents to two terminals at one time. Use with test leads up to 600 V, 32 A CAT II. | 1        | TPA10       |
|    | <b>SMRT410 hard-sided transit case:</b> Rugged, hard-sided transit case includes custom designed foam inserts for the SMRT410 unit and accessories. The transit case includes retractable handle, built-in wheels, and lock-down latches, fold-down handles, with O-ring seal.<br>Weight: 28 lb. (12.7 kg)<br>Dimensions: 27 x 13 x 21 in.<br>68.58 x 33.02 x 53.34 kg                                  | 1        | 1002-787    |
|    | <b>SMRT410D hard-sided transit case:</b> Includes custom designed foam inserts for the SMRT410D unit, and accessories. Transit case includes retractable handle, built-in wheels, twist and lock-down latches, spring loaded fold-down handles, with O-ring seal  | 1        | 1007-084    |
|   | <b>SMRT410D soft-sided carry case:</b> The soft-sided carry case protects the unit from light rain and dust. The padded sides provide moderate protection while in transit.   | 1        | 2007-218    |
|  | <b>POE WIFI Kit:</b> Connects non-display models to PC via WIFI. Contains POE splitter that is powered from the STVI port, WIFI device, and one foot ethernet cable.  | 1        | 1015-747    |

<sup>1</sup> Megger reserves the right to change product specifications at any time.

<sup>2</sup> Requires VIGENS with hardware version 3.5.1 or higher.

<sup>3</sup> For the ability to test relays with low level inputs by simulating signals from non-conventional CTs and VTs with low level interfaces, i.e., Rogowski coils will require the Megger MLLA (Low Level Adapter). Only VIGEN modules can be converted to work with MLLA adapters.

<sup>4</sup> PowerV™ voltage amplifier output current varies depending on the voltage setting on the 150 Volt range, see curve.

**UNITED STATES**  
4545 West Davis Street  
Dallas, TX 75211-3422  
T 800.723.2861  
T +1 214.333.3201  
F +1 214.331.7399  
E usasales@megger.com

**CANADA**  
550 Alden Road, Unit 106  
Markham, Ontario L3R 6A8  
T (800) 567-0286  
F (416) 298-7214  
E casales@megger.com

**SMRT410--SMRT410D\_DS\_EN-US\_v3**  
www.megger.com  
ISO 9001  
The word 'Megger' is a registered trademark

**Megger**