


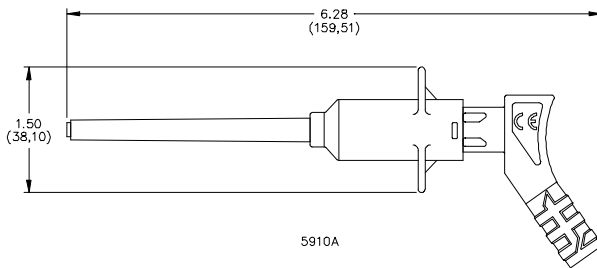
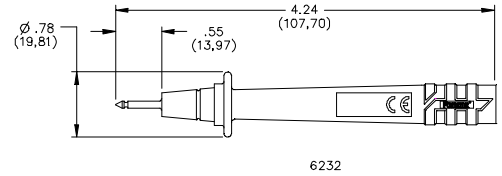


Pomona®

Model 5901A Bench DMM Test Lead Kit

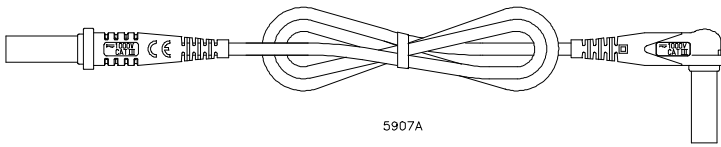

FEATURES:

- Fits Fluke, H-P, Tektronix, Wavetek and Amprobe DMM's with sheathed style safety jacks.
- Flexible test leads feature high strand count silicone wire for extreme flexibility and high temperature resistance. Banana plugs are double crimped to the wire and the plugs are molded directly to the wire for added pull strength.
- Maxigrabber® Test Clip with Pincer features a long shaft and is ideal for electrical and industrial applications where access to hard to reach high voltage test points is a requirement. Maxigrabber can securely grab a .16" (4 mm) Max. O.D. Terminal Post.
- Medium Alligator is insulated for added safety and features a jaw opening of up to 0.30" (8 mm).
- Insulated Spade Lugs are compatible with screw sizes from #10 to 1/4". (M4 to M6)
- Maxigrabber® Test Clips, Spade Lugs, Medium Alligators and Test Probes mates to the flexible test leads.
- Tri-fold pouch of durable nylon conveniently stores the test accessories.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies.

KIT ITEMS:

Medium Alligator: Body–Steel, Nickel Plated, Insulation–Polypropylene, Fire Retardant, UL94 V-O
Color: One Black, One Red.

Spade Lug: Brass, Nickel Plated, Insulation –Nylon 6, Fire Retardant, Color: One Black, One Red

Test Probe: Insulation –Fire Retardant, Color: One Black, One Red
Notched Probe Tip – Brass, Nickel Plated

Test Leads (Male to Male): Multi-Stranded Wire: 18 AWG Silicone, Wire Length: 48" (122 cm)
Banana Plug: Insulation: Polypropylene, Color: One Black, One Red

Maxigrabber® Test Clip with Pincer Style: Pincher: Beryllium Copper, Nickel Plated
Plunger, Housing: Polypropylene, Fire Retardant, Color: One Black, One Red
Banana Jack: Body - Brass, Nickel Plated
Tube: Santoprene®, Color: Yellow
Compression Spring: Stainless Steel

RATINGS:

Conforms to IEC 1010, Cat. III, P2

Operating Voltage: 1000V, Medium Alligator: 300V

Current: 10 Amperes, Medium Alligator: 5 Amperes, Spade Lug: 3 Amperes

UL Rated: Medium Alligator, Test Probe, Test Leads, Maxigrabber® Test Clip with Pincer style.

ORDERING INFORMATION: Model 5901A

Replacement P/N's: Medium Alligator Set (Model 5916A), Spade Lug Set (Model 6203), Probes Set (Model 6232), Test Leads (Model 5907A) and Tri-Fold (Model 5955) Maxigrabber Test Clip W/ Pincer Style (Model 5910A).

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA

TRANSCAT®

▶ Visit us at Transcat.com!

35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001