


Technical Data Sheet

Models 72929 Mini SMD Grabber Test Clip Lead with 4mm Jack



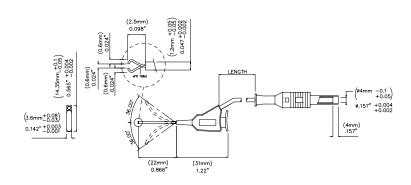

Features

- SMD Grabber Test Clip (Pomona 72906) with 20 Inch(50cm) lead
- 4mm Jack for easy attachment to DMM leads.

Materials

Grabber End:

- Insulation: Polyamide
- Jaws: Steel

Jack End:

- Insulation: Polypropylene
- Socket Body: Nickel plated Brass

Ordering Information

Model: 72929-20-Color Black (-0) or Red (-2)

Specifications

Max Current Admissible	1A
Voltage; Max - Tension	33 V AC / 70 V DC

Rating: *hands free testing* in controlled environment: 70Vrms max. For CE compliance: Not intended for handheld use at voltages above 33Vrms/70Vdc

TRANSCAT 35 Vantage Point Drive Rochester, NY 14624 800-828-1470 www.transcat.com

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02^{\circ}$ (,51 mm), $.xxx = \pm .005^{\circ}$ (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.