


### **Model 6244**

### Minigrabber® Test Clip to Right Angle Sheathed Banana Plug

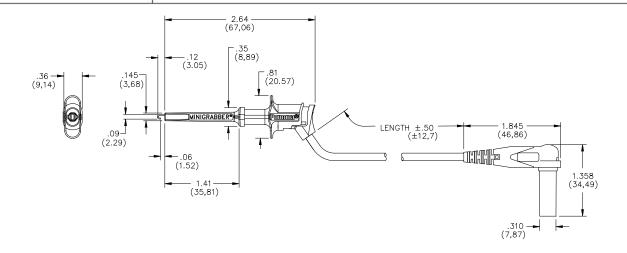

#### **Features**

- Newly designed Minigrabber® Test Clip Patch Cord complies with IEC 61010-2-31, which is the latest international safety standard for test accessories.
- Grabber width is a slim .36" (9,14 mm) for easier side by side stacking.
- Grabber hook is gold plated beryllium copper to ensure signal integrity & attaches onto component leads up to .060" (1,5 mm) O.D.
- Grabber patch cord interfaces directly into the most popular multimeters configured with 4 mm sheathed safety jacks, including Amprobe. Fluke, H-P. Tektronix and Wavetek.
- Plug is molded directly to the cable in an integral one-piece design and the wire is double crimped for a long lasting connection.
- Multi-leaf banana spring material is nickel plated beryllium copper for extended insertion life & low contact resistance.
- High strand count silicone insulated wire offers excellent flexibility and high temperature resistance.

#### **Materials**

Grabber: Body: Polypropylene, Color per Part Number

Hook: Beryllium Copper, Gold Plated, compression Spring: Music Wire

Wire: 18 AWG, 65 x 36 Tinned Copper, Insulation – Silicone, .144" (3,66 mm) O.D., Color per P/N

Banana Plug: Body - Brass, Nickel Plated, Spring - Beryllium Copper, Nickel Plated

Insulation – Polypropylene, Color per P/N

## **Ratings**

IEC 61010 2-031, Category II, P2 Compliant Operating Voltage: 300 VRMS/DC Max. Current: 5 Amperes Max.

# **Ordering Information**

Model 6244-XX-\*

XX = Length in Inches, Standard Length: 48" (122 cm)

\* = Color Code, -0 Black, -2 Red

**USA:** Sales: 800-490-2361

Technical Support: <a href="mailto:technicalsupport@pomonatest.com">technicalsupport@pomonatest.com</a>

Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 International: 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.