




ZTEK®

TRANSCAT®

▶ Visit us at Transcat.com!

35 Vantage Point Drive Rochester, NY 14624
Call 1.800.800.5001

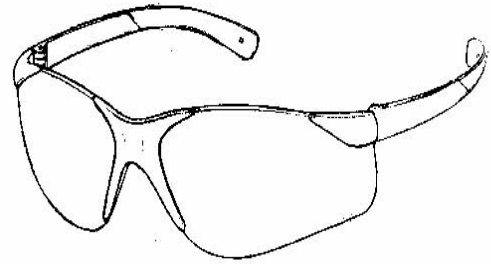

SPECIAL FEATURES:

- Economical wrap-around single lens provides full panoramic view
- Soft, non-slip rubber temple tips provide non-binding fit
- Integrated nosepiece
- Lenses are coated for superior scratch resistance
- Lenses provide 99% protection against harmful UV rays

GENERAL SPECIFICATIONS

Lens Thickness:	2.5mm	PD	68mm
Lens Base	10.0 curve	Weight	25gm
Lens size vertical	44 mm	Lens Size Diagonal	64mm
Bridge	13 mm	Temple length (lens-tip)	154mm

Overall Width (hinge-hinge) 137.5mm

FRAME AND LENS OPTIONS:

- Frame/Lens Options:
 - o Clear, Clear Anti-fog, Coffee, Gray, Amber, Orange, Infinity Blue, Purple Haze, Silver Mirror, Blue Mirror, Indoor/Outdoor Mirror, Gold Mirror

COMPONENT	MATERIAL	FEATURES
Lens	Polycarbonate	Attractive & stylish unitary lens
Frame	Polycarbonate	Matted finish Integral to lens
Side Shield	Polycarbonate	Integral to lens
Nose piece	Polycarbonate	V Bridge -integral to lens
Sleeve (on temple)	n/a	n/a
Temple	Polycarbonate	Matte finish – straight back design
Temple tip	PVC	Soft to prevent slippage
Hinge	Polycarbonate	3 barrel type, integral to frame
Screw	Stainless steel	standard hinge screw

MARKINGS:

Lens: As per standard

Frame: As per standard

PACKAGING:

1 pc in a polybag; 12 pcs in an inner box; 300 pcs in a case

STANDARDS:

MEETS ANSI Z87.1 STANDARDS; CE EN166 Certified
TEST RESULTS AVAILABLE UPON REQUEST

TRANSCAT®

▶ Visit us at Transcat.com!

35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001