


**Model 5912A**  
**Maxigrabber<sup>®</sup> Set**  
**Alligator Style**

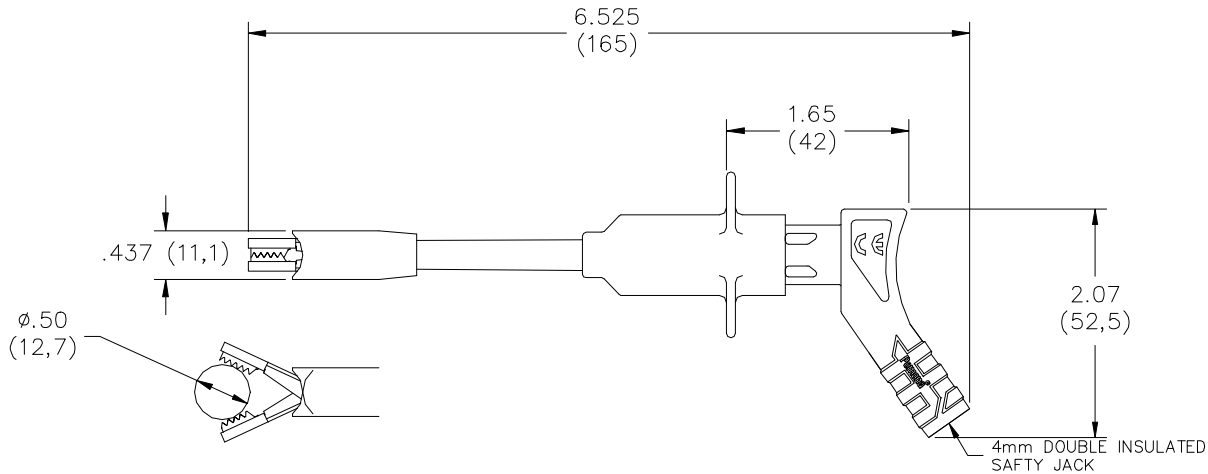

- Maxigrabber<sup>®</sup> set has been redesigned to meet IEC 1010-2-31. This is the latest international safety standard for test accessories.
- The long shaft is ideal for electronic, electrical and industrial applications where access to hard to reach high voltage test points is a requirement.
- Safety sheathed jack mates to Pomona's 5907A, 5908A and 5909A Flexible Test Leads for Digital Multi-Meter interfacing.
- Alligator tips include an insulated guard for circuit protection.

**MATERIALS:**

Alligator: Beryllium Copper, Nickel Plated  
 Plunger, Housing, Alligator Insulator Body, Alligator Tip Guards: Nylon 6 (Fire Retardant, UL94V-0 Rated),  
 Color: One Black or Red  
 Banana Jack: Body - Brass, Nickel Plated  
 Tube: Santoprene<sup>®</sup>, Color: Yellow  
 Compression Spring: Stainless Steel

**RATING:**

IEC 1010, Category III, P2 Compliant  
 Voltage: 1,000 VRMS/DC  
 Current: 10 Amps. Max.

**ORDERING INFORMATION:** 5912A (Includes Set of one black and one red)

The Maxigrabber<sup>®</sup> Test Clip is also available in various Pomona DMM Test Kits.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).  
 All specifications are to the latest revisions. Specifications are subject to change without notice.  
 Registered trademarks are the property of their respective companies.

Made in USA