

T-140

Pressure Calibrator/Manometer

Description

The T-140 Pressure Calibrator/Manometer is designed to give the technician laboratory-grade accuracy in a rugged, easy-to-use instrument. The T-140 is available in several ranges — 10" H₂O, 200" H₂O, and 30, 100, 300, and 3,000 PSI. Operation of these calibrators is made easy through the use of a sealed membrane keypad with simple controls. When combined with a Martel Hand Pump, the T-140 Kit makes a great package to handle your pneumatic calibration requirements.

TRANSCAT[Visit us at Transcat.com!](http://www.transcat.com)

35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001

Features

- High accuracy gauge or differential capability
- Rugged, dust tight, water-resistant case
- Isolated SS sensors on 300 PSI and 3,000 PSI units
- Easy to read Super-Twist LCD
- Intuitive controls make operation easy, even for infrequent users
- Powered by a common 9 Volt alkaline battery
- Supplied in full rubber boot



T-140 Specifications (1 year at 23 °C ±5 °C; % of reading unless otherwise noted)

Ranges	-14 to 30 PSIG/PSID -14 to 100 PSIG/PSID -14 to 300 PSIG -14 to 3000 PSIG ±10" H ₂ O ±200" H ₂ O (0-7 PSI)
Accuracy	18 °C to 28 °C ±10" H ₂ O ±0.1% of FS ±200" H ₂ O ±0.05% of FS 30 PSI ±0.05% of FS 100 PSI ±0.05% of FS 300 PSI ±0.05% of Rdg ± 2 LSD 3,000 PSI ±0.05% of Rdg ± 2 LSD
Resolution	±10" H ₂ O 0.001" H ₂ O ±200" H ₂ O 0.01" H ₂ O 30 PSI 0.001 PSI 100 PSI and 300 PSI 0.01 PSI 3,000 PSI 0.1 PSI
Engineering Units	PSI, inH ₂ O, cmH ₂ O, mmH ₂ O, mH ₂ O, FtH ₂ O, mBAR, BAR, inHg, mmHg, cmHg, kPa, kg/cm ² , TORR, ATM
Temperature Stability	±0.01% FS/°C; 0 °C to 18 °C, and 28 °C to 50 °C
Maximum Overpressure	Ranges >100 PSI 2x Ranges <30 PSI 3x
Ports	Two 1/8" FNPT
Media	30/100 PSI, 10" H ₂ O, non-corrosive gas or 200" H ₂ O liquids 300/3,000 PSI all media
Environmental	Operating Temperature 0 °C to +50 °C Storage Temperature -20 °C to +60 °C


Power Requirements	9 VDC
Battery	1, 9V alkaline battery; 006P/ IEC 6F22/NEDA1604

Mechanical	
Dimensions (without boot)	5.7" H x 3.5" W x 1.43" D (144.7 x 80.0 x 36.3 mm)
Weight	14 ounces (396 gms.)

MECP-100 Hand Pump

The MECP-100 Hand Pump is a simple to use pressure and vacuum source for calibrating process control instrumentation.

An optional in-line filter is available for applications where contaminants may enter the pump.

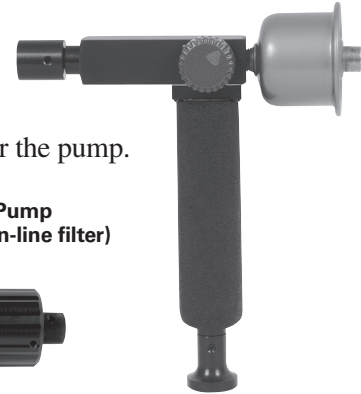

MECP-100 Hand Pump
(shown with optional in-line filter)



MECP-500 Hand Pump

Ordering information

Pressure Calibrator/Manometer; ±10" H ₂ O	T-140-10"
Pressure Calibrator/Manometer; ±200" H ₂ O	T-140-200"
Pressure Calibrator/Manometer; -14 to 30 PSI	T-140-30
Pressure Calibrator/Manometer; -14 to 100 PSI	T-140-100
Pressure Calibrator/Manometer; -14 to 300 PSI	T-140-300
Pressure Calibrator/Manometer; -14 to 3000 PSI	T-140-3000
Hand Pump; -14 to 100 PSI	MECP-100
Hand Pump; -14 to 500 PSI	MECP-500
Hand Pump; -14 to 3000 PSI	MECP-3000
Pressure Kit	T-140- <u>X</u> K

Kit contains T-140 Calibrator, Hand Pump for selected range, fittings and connectors, rugged carrying case, test leads, 9V battery, and NIST traceable certificate. Replace X with Calibrator/Manometer Range as shown above (i.e. 300 for 300 PSI).

Distributed by:

TRANSCAT

▶ Visit us at Transcat.com!

35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001