


Pomona®

Model 3788 BNC Female To Minigrabber® Test Clip Breakout

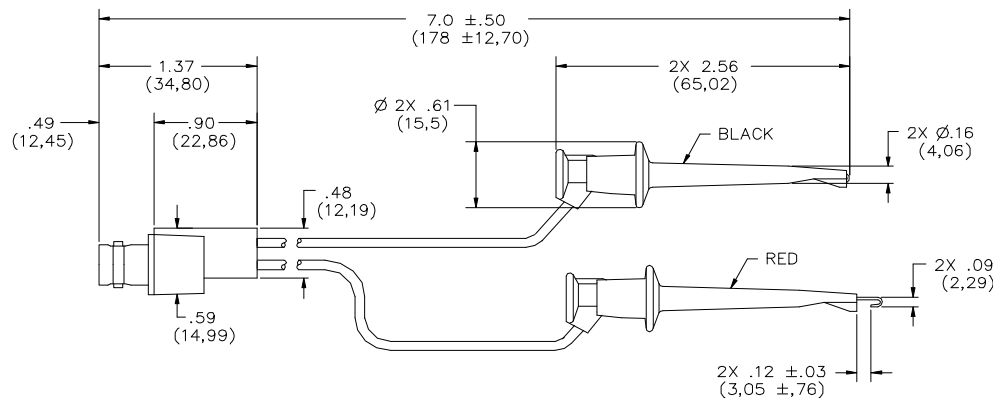

FEATURES:

- Grabber hooks attach to terminal sizes up to .060" (1,5mm) O.D.
- Converts BNC (Male) cables to Minigrabber® Test Clips for test versatility.
- BNC connector and grabber cap are molded directly to the wire for pull strength durability and dust/moisture resistance.
- Grabber hook and BNC center contact are beryllium copper for superior strength.
- Gold plating of grabber hook and BNC center contact offers optimum corrosion resistance and low contact resistance to ensure test signal integrity.
- Schematic: Black grabber to BNC shell, red grabber to BNC center contact.

MATERIALS:

BNC: Body – Brass, Nickel Plated, Center Contact – Beryllium Copper, Gold Plated.

Wire: 20 AWG, Stranding 41 x 36 T.C., PVC Insulated, .087" (2,21 mm) O.D.

Marking: Model 3788, Color matches Grabber.

Grabber: Contact – Beryllium Copper, Gold Plated

Spring – Stainless Steel

Insulation – Glass Filled Nylon. Color: one red, one black

RATING:

Voltage: Hand-held testing: 30VAC/60VDC Max.

Hands free testing in controlled voltage environments: 300VRMS Max.

Operating Temperature: +55°C (+131°F) Max.

ORDERING INFORMATION: Model 3788

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA