

Coaxial Cable Assemblies and Breakouts

TRANSCAT

▶ Visit us at Transcat.com!

35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001

Pomona




Coaxial Cable Assemblies and Breakouts

Pomona ACCESS

FAX ON DEMAND This symbol indicates immediate Fax-On-Demand Technical Information is available. Dial (U.S.) (800) 444-6785, (Outside U.S.) (949) 253-3858. Enter the Pomona Access number (shown in italics) when prompted.


BNC MALE TO MINIGRABBER® TEST CLIPS

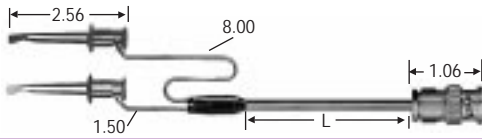

RATING: 300 VRMS Max., +50°C (+122°F) Max.
CABLE TYPE: RG58C/U
BNC Connector materials same as BNC-C (p. 32).

<i>Pomona ACCESS</i>	Part No.	Length
90328	3787-C-18	18"
	3787-C-24	24"
	3787-C-36	36"
	3787-C-48	48"
	3787-C-60	60"


BNC MALE WITH MOLDED STRAIN RELIEF TO MINIGRABBER® TEST CLIPS

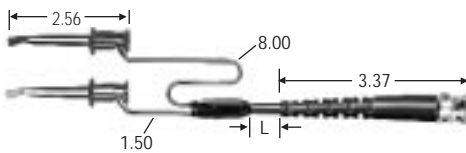

RATING: 300 VRMS Max., +50°C (+122°F) Max.
BNC Connector and strain relief materials same as Model 2249-C (p. 31).

<i>Pomona ACCESS</i>	Part No.	Cable Type	Length
90458	5187-C-24	RG 58C/U, .195" O.D.	24"
	5187-C-36		36"
	5187-C-48		48"
	5187-C-60		60"
	5187-K-24	RG 174/U, .100" O.D.	24"
	5187-K-36		36"
	5187-K-48		48"
	5187-K-60		60"


BNC MALE WITH MOLDED STRAIN RELIEF TO SMD GRABBER® TEST CLIPS

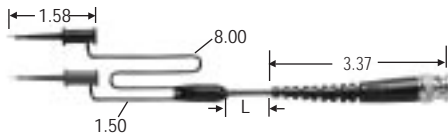

RATING: 150 VRMS Max., +50°C (+122°F) Max.
CABLE TYPE: RG174/U, .100" O.D.
BNC Connector and strain relief materials same as Model 2249-C (p. 31).

<i>Pomona ACCESS</i>	Part No.	Length
90465	5304-K-24	24"
	5304-K-36	36"


BNC MALE WITH MOLDED STRAIN RELIEF TO MAXIGRABBER® TEST CLIPS

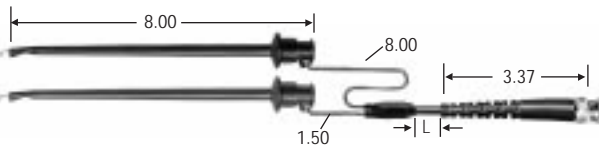

RATING: 300 VRMS Max., +50°C (122°F)
CABLE TYPE: RG58C/U, .195" O.D.
BNC Connector and strain relief materials same as Model 2249-C (p. 31).

<i>Pomona ACCESS</i>	Part No.	Length
90384	4648-C-24	24"
	4648-C-36	36"
	4648-C-48	48"
	4648-C-60	60"


BNC MALE WITH MOLDED STRAIN RELIEF TO MICROGRABBER® TEST CLIPS

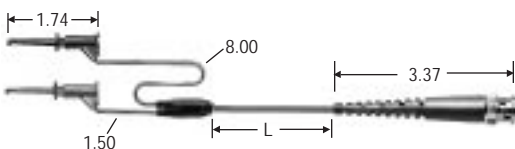

RATING: 150 VRMS Max., +50°C (+122°F) Max.
BNC Connector and strain relief materials same as Model 2249-C (p. 31).

<i>Pomona ACCESS</i>	Part No.	Cable Type	Length
90402	4777-C-24	RG 58C/U, .195" O.D.	24"
	4777-C-36		36"
	4777-C-48		48"
	4777-C-60		60"
	4777-K-24	RG 174/U, .100" O.D.	24"
	4777-K-36		36"
	4777-K-48		48"
	4777-K-60		60"


BNC MALE WITH MOLDED STRAIN RELIEF TO MINIPINER® TEST CLIPS

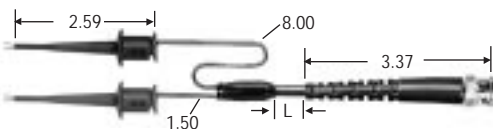

RATING: 300 VRMS Max., +50°C (+122°F) Max.
CABLE TYPE: RG58C/U, .195" O.D.
BNC Connector and strain relief materials same as Model 2249-C (p. 31).

<i>Pomona ACCESS</i>	Part No.	Length
90641	5423-C-18	18"
	5423-C-24	24"
	5423-C-36	36"
	5423-C-48	48"
	5423-C-60	60"


BNC MALE WITH MOLDED STRAIN RELIEF TO ALLIGATOR TEST CLIPS

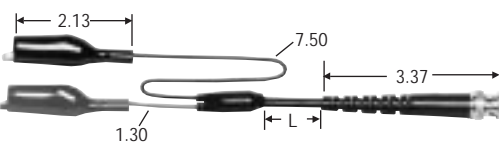

RATING: 150 VRMS +50°C (+122°F)
CABLE TYPE: RG58C/U, .195" O.D.
Jaws open to .300" Max.
BNC Connector and strain relief materials same as Model 2249-C (p. 31).

<i>Pomona ACCESS</i>	Part No.	Length
90364	4531-C-18	18"
	4531-C-24	24"
	4531-C-30	30"
	4531-C-36	36"
	4531-C-48	48"
	4531-C-60	60"

BNC MALE WITH MOLDED STRAIN RELIEF TO MINIGATOR® TEST CLIPS

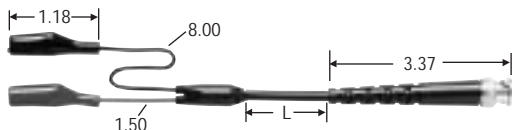

RATING: 45 VRMS Max., +50°C (+122°F) Max.
CABLE TYPE: RG58C/U, .195" O.D.
Jaws open to .187" Max.
BNC Connector and strain relief materials same as Model 2249-C (p. 31).

<i>Pomona ACCESS</i>	Part No.	Length
90595	4532-C-18	18"
	4532-C-24	24"
	4532-C-30	30"
	4532-C-36	36"
	4532-C-48	48"
	4532-C-60	60"

See chart on page 30 for additional cable specifications.

TRANSCAT

▶ Visit us at Transcat.com!