


**Model 5301 & 5521
 SMD Grabber[®] Test Clip Patch Cord**

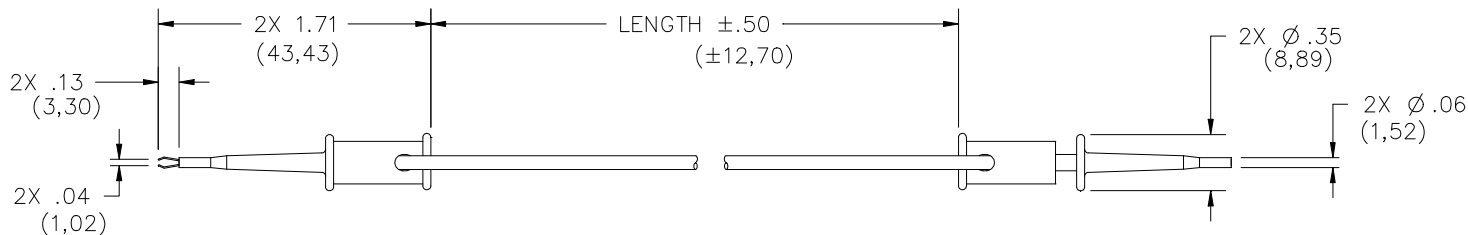

FEATURES:

- Ideal for providing a temporary jumper wire between surface mount devices.

MATERIALS:

SMD Grabber[®] test clip
 Contact - Stainless Steel
 Spring – Stainless Steel
 Cap – Glass filled nylon. Color matches color of wire
 Barrel – Glass filled nylon. Color matches color of wire
 Marking: “POMONA GRABBER[®]”
 Finish: Gold plated
 Wire: 22 AWG, PVC insulated
 Marking: “Model 5301”

RATINGS:

Operating Temperature: +102°C (+216°F) Max.
 Voltage: Hand-held testing 33 Vrms/70 Vdc Max.
 Hands free testing in controlled voltage environments: 150 WVDC Max.
 Current: .5 Amperes

ORDERING INFORMATION: Model 5301-XX-*

XX = Standard Lengths in Inches, 12” and 24”
 * = Color, -0 Black, -2 Red
 Ordering Example: 5301-12-2 Indicates 12”, color is red.

5521 Kit contains 10 pieces of model 5301-24, 1 each of 10 colors.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies.