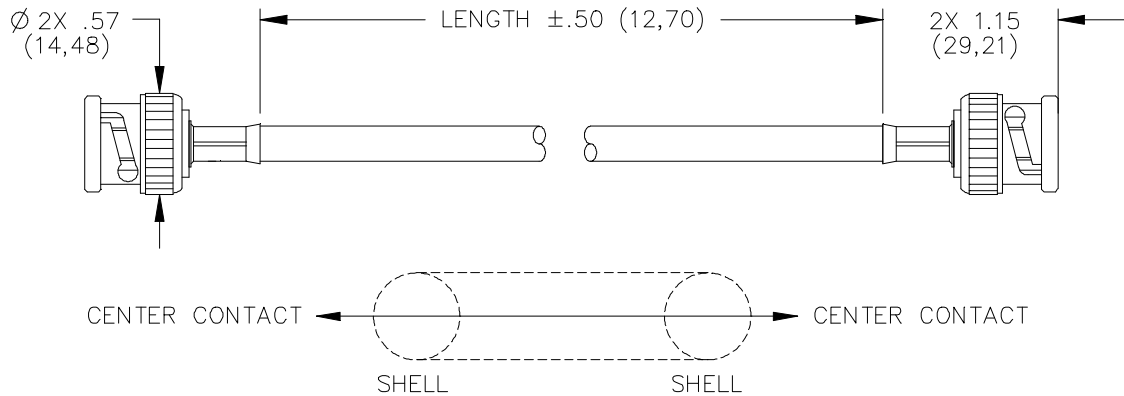


Pomona®

TRANSCAT▶ Visit us at [Transcat.com!](http://Transcat.com)35 Vantage Point Drive Rochester, NY 14624
Call 1.800.800.5001**Model 5697****BNC Male 50 Ohm Cable****FEATURES:**

- Same high quality construction as 2249-C without molded strain relief.

MATERIALS:Conn: 1st End-BNC Male

Impedance: 50 Ohms

Material: Body and Center Contact – Brass

Finish: Body: Tarnish Resistance

Center Contact: Gold Plated

Cable: RG58C/U

Impedance: 50 Ohms

O.D.: (0.195)

Marking: “POMONA 5697”

Conn: 2nd End-Same as first end**RATINGS:**

Voltage: Shield/Earth: 30VAC/60VDC Max.

Inner Conductor/Shield: 500VRMS Max.

Operating Temperature: +80°C. (+176°F.) Max.

ORDERING INFORMATION: Model 5697-XX

XX=Cable Length, Standard Length: 12” (305), 24” (610), 36” (914), 48” (1219), 60” (1524), 72” (1829), 120” (3048), 144” (3658), 180” (4572), 240” (6096)

Ordering Example: 5697-240 indicates 240” in length.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ±.005” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

TRANSCAT▶ Visit us at [Transcat.com!](http://Transcat.com)

35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001

TRANSCAT