


Pomona®

TRANSCAT

▶ Visit us at Transcat.com!

35 Vantage Point Drive Rochester, NY 14624
Call 1.800.800.5001

Model BNC-x-XX BNC Male to Male Cable Assembly

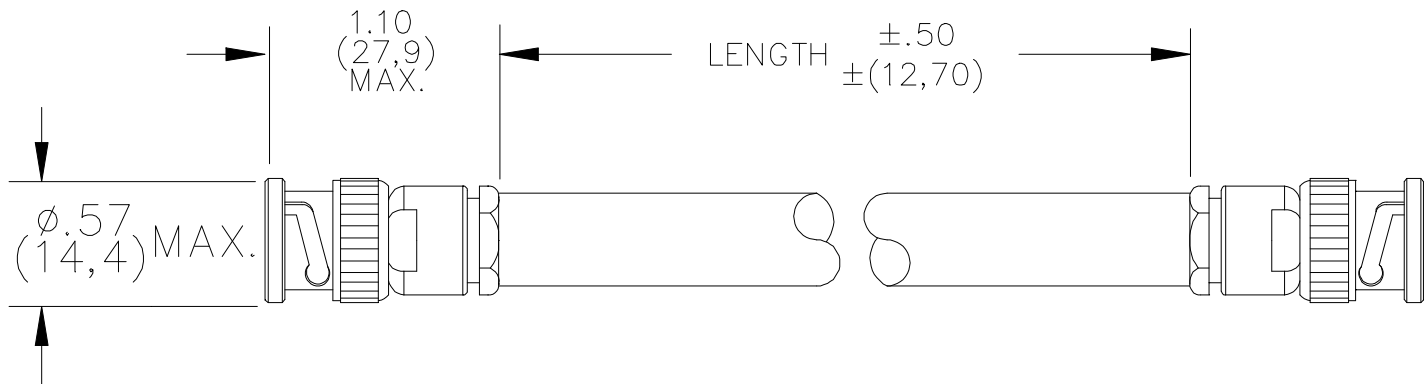

Part No.	Cable Type	Capacitance PF/ft.	Nominal Impedance	Cable Color	Cable O. D.
BNC-C-XX	RG58C/U	30.8	50 Ohms	Black	0.195"
BNC-M-XX	RG62C/U	13.5	93 Ohms	Black	0.242"

MATERIALS:

BNC Body: Brass, Tarnish Resistant Plating, Center Contact: Gold Plated Brass

Dielectric: PTFE

RATINGS:

Voltage: Shield-Earth: 30VAC/60VDC Max.

Inner Conductor/Shield: 500VRMS Max.

Operating Temperature: +80°C (+176°F) Max.

Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model BNC-x-XX

x = Cable Type

XX = Cable Length in inches, length tolerance: ± 0.5 "

Standard Lengths: 18", 24", 36", 48", & 60"

All dimensions are in inches. Tolerances (except noted): .xx = ± 0.02 " (.51 mm), .xxx = $\pm .005$ " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA

08/31/99

SY/EH/LS

R:\Release\DataSheet\To_Marketing_99C\BNC-C_M_1_01.doc

TRANSCAT

▶ Visit us at Transcat.com!

35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001