


DMT340 Series Dewpoint and Temperature Transmitters for Very Dry Conditions

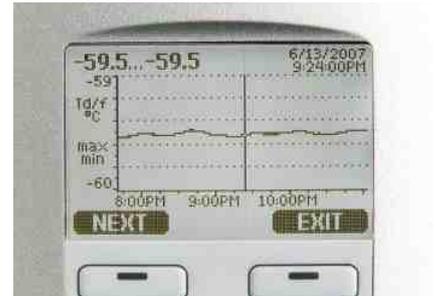

The display shows measurement trends, real-time data, and measurement history.

Features/Benefits

- Measures dew point from -60 °C to +80 °C (-76 ... +176 °F) with an accuracy of ± 2 °C (± 3.6 °F)
- Vaisala DRYCAP® sensor provides accurate, reliable measurement with excellent long-term stability and a fast response time
- Condensation-resistant
- Unique auto-calibration feature
- Compatible with Vaisala DRYCAP® Hand-Held Dewpoint Meter DM70
- NIST traceable calibration (certificate included)
- Graphical display and keypad for convenient operation
- Optional alarm relays and mains power supply module
- Analog outputs, RS232/485, WLAN/LAN
- MODBUS protocol support (RTU/TCP)

The Vaisala DRYCAP® Dewpoint and Temperature Transmitter Series DMT340 is designed for industrial low-humidity applications such as compressed air drying and metal treatment. The transmitters are very reliable, easy to use, and economical to maintain.

Stability at Low Dew Points

The Vaisala DRYCAP® sensor is immune to particulate contamination, water condensation, oil vapor, and most chemicals. Since the sensor is condensation-resistant, its performance is unmatched in low dew point applications where water spikes occur in the process. The sensor recovers rapidly from contact with free water.

Unique Auto-Calibration Feature

The stability of the DMT340 series is due to its unique auto-calibration function, developed by Vaisala. This

feature allows the transmitter to perform calibration and adjustment by itself while the measured process is running. If the measurement accuracy is not confirmed, corrections are made automatically. The procedure is so quick and corrections so minor that it causes no disruption, ensuring easy maintenance and high performance. To maintain high performance, transmitters can be sent to Vaisala for calibration. Calibration intervals depend on the application; in normal conditions it is recommended to have calibration performed every two years.

Graphical Display of Measurement Data and Trends for Convenient Operation

The DMT340 features a large numerical and graphical display with a multilingual menu and keypad. It allows users to easily monitor operational data, measurement trends, and access measurement history for the past 12 months.

The optional data logger, with real-time clock, makes it possible to generate over four years of measurement history and zoom in on any desired time or time frame.

The display alarm allows tracking of any measured parameter, with freely configurable low and high limits.

Versatile Outputs and Data Collection

The DMT340 can support up to three analog outputs; an isolated galvanic power supply and relay outputs are also available.

For serial interface the USB connection, RS232, and RS485 can be used.

DMT340 is also capable of applying the MODBUS communication protocol and, together with an appropriate connection option, provides either MODBUS RTU (RS485) or MODBUS

TCP/IP (Ethernet) communication.

The data logger, with real-time clock and battery backup, guarantees reliable logging of measurement data for over four years. The recorded data can be viewed on the local display or transferred to a PC with Microsoft Windows® software. The transmitter can also be connected to a network with an optional (W)LAN interface, which enables a (wireless) Ethernet connection. A USB service cable makes it easy to connect the DMT340 to a PC via the service port.

Easy Installation

DMT340 transmitters are delivered installation-ready, with a variety of installation options to choose from.



The Vaisala DRYCAP® Hand-Held Dewpoint Meter DM70 is ideal for field-checking DMT340 transmitters.



The DMT342 probe is installed using a flange or sampling cell. The small probe is ideal for integration into larger equipment.


Probe Specifications

DMT342 with Small Size Flanged Probe

Pressure range	0 ... 50 bar/0 ... 725 psia
Mechanical durability	up to 250 bar/ 3625 psia
Probe diameter	12 mm/0.5"
Installation	
Flange	36 mm/1.4"
Sampling cell	HMP302SC

Dimensions

Dimensions in mm (inches)

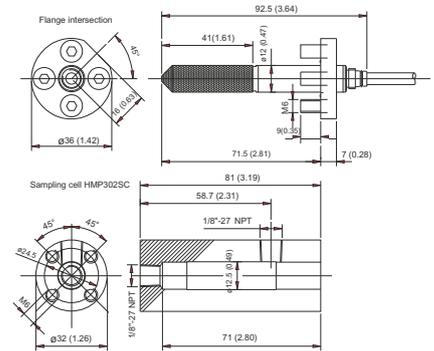

The DMT344 features a threaded connection for extended pressures with different fitting-body options. It is ideal for permanent installation into pressurized or vacuum processes.


Probe Specifications

DMT344 with Probe for High Pressures

Pressure range	0 ... 50 bar/0 ... 725 psia
Mechanical durability	up to 100 bar/ 1450 psia
Probe diameter	12 mm/0.5"
Installation	
Fitting body	M22 x 1.5
Fitting body	NPT 1/2"

Dimensions

Dimensions in mm (inches)

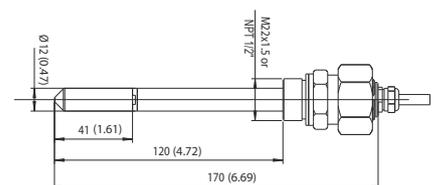



The DMT347 probe is ideal for tight spaces with a thread connection. The small probe is installed using Swagelok® connectors.


Probe Specifications

DMT347 with Small-Sized Probe

Pressure range	0 ... 10 bar/0 ... 145 psia
Mechanical durability	up to 10 bar/145 psia
Probe diameter	12 mm/0.5"
Installation	
Fitting body	R 3/8" ISO
Fitting body	G 1/2" ISO
Fitting body	NPT 1/2"

Dimensions

Dimensions in mm (inches)

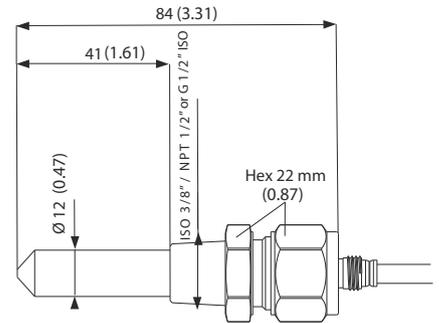

The DMT348 is ideal for installation into pressurized processes where the probe needs to be able to be removed while the process is running. The probe depth is adjustable.


Probe Specifications

DMT348 with Probe for Pipeline Installations

Pressure range	0 ... 40 bar/0 ... 580 psia
Adjustable length	41 ... 149/371 mm/ 1.61 ... 5.87/14.6"
Installation	
Fitting body	R1/2" ISO
Fitting body	NPT 1/2"
Ball-valve set	BALLVALVE-1
Sampling cell	DMT242SC or DMT242SC2

Dimensions

Dimensions in mm (inches)

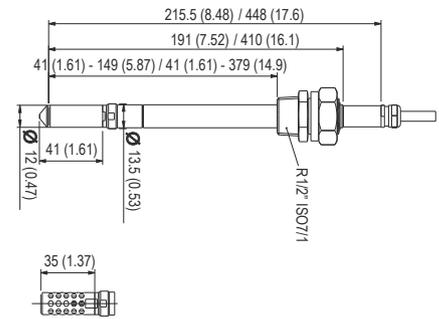


Optional filter for low pressures (suitable for all models)

Technical Data

Measured Parameters

DEW POINT

Sensor	Vaisala DRYCAP®180M	
Measurement range	-60 ... +80 °C (-76 ... +176 °F) Td	
For continuous use	-60 ... +45 °C (-76 ... +113 °F) Td	
Accuracy	±2 °C/±3.6 °F	
up to 20 bar/290 psia	(see the accuracy graph below)	
20 ... 50 bar/290 ... 725 psia	additional inaccuracy +1 °C Td	

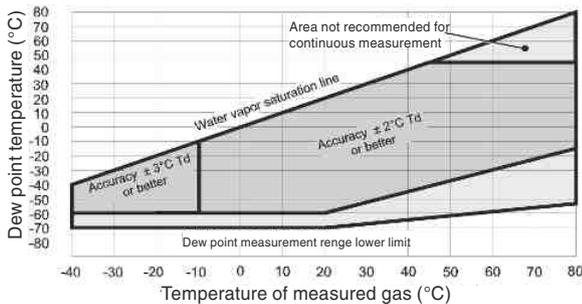

Dew point accuracy vs. measurement conditions

Response time	63% [90%] at +20 °C gas temperature	
Flow rate	1 l/min and 1 bar pressure	
-60 ... -20 °C Td (-76 ... -4 °F Td)	5 s [10 s]	
-20 ... -60 °C Td (-4 ... -76 °F Td)	45 s [10 min]	

TEMPERATURE

Measurement range	0 ... +80 °C (+32 ... +176 °F)	
Accuracy	±0.2 °C at room temperature	
Temperature sensor	Pt100 RTD Class F0.1 IEC 60751	

RELATIVE HUMIDITY

Measurement range	0 ... 70 %RH	
Accuracy (RH < 10 %RH, at +20 °C)	±0.004 %RH + 20% of reading	

PPM

Measurement range (typical)	10 ... 2500 ppm	
Accuracy (at +20 °C, 1 bar)	1 ppm + 20% of reading	
Other measurement parameters available (model-dependent): mixing ratio, absolute humidity, pressure dew point calculated to 1 bar, temperature difference (T-Td), water vapor pressure		

Operating Environment

Operating temperature		
for probes	-40 ... +80 °C (-40 ... +176 °F)	
Mechanical durability	up to +180 °C (+356 °F)	
of transmitter body	-40 ... +60 °C (-40 ... +140 °F)	
with display	0 ... +60 °C (+32 ... +140 °F)	
Storage temperature range	-55 ... +80 °C (-67 ... +176 °F)	
Pressure range for probes	see probe specifications	
Sample flow rate	no effect	
Measured gases	non-corrosive gases	
Electromagnetic compatibility	Complies with EMC standard EN61326-1, Industrial environment	

Note: Transmitter with display test impedance of 40 ohm is used in IEC61000-4-5 (Surge immunity)

Inputs and Outputs


Operating voltage	10 ... 35 VDC, 24 VAC ±20 %	
with optional power supply module	100 ... 240 VAC 50/60 Hz	
Power consumption @ 20 °C (U _{in} 24VDC)		
RS232	max. 25 mA	
U _{out} 2 x 0...1V / 0...5V / 0...10V	max. 25 mA	
I _{out} 2 x 0...20 mA	max. 60 mA	
display and backlight	+ 20 mA	
during sensor purge	max. + 110 mA	
Analogue outputs (2 standard, 3rd optional)		
current output	0 ... 20 mA, 4 ... 20 mA	
voltage output	0 ... 1 V, 0 ... 5 V, 0 ... 10 V	
Accuracy of analog outputs at 20 °C	0.05% full scale	
Temperature dependence of the analog outputs	± 0.005%/°C full scale	
External loads		
current outputs	R _L < 500 ohm	
0 ... 1V output	R _L > 2 kohm	
0 ... 5V and 0 ... 10V outputs	R _L > 10 kohm	
Max. wire size	0.5 mm ² (AWG 20) stranded wires recommended	
Digital outputs	RS232, RS485 (optional)	
Service connection	RS232, USB	
Relay outputs	0.5 A, 250 VAC, SPDT (optional)	
Ethernet interface (optional)		
Supported standards	10/100Base-T	
Connector	RJ45	
Protocols	Telnet	
WLAN interface (optional)		
Supported standards	802.11b	
Antenna connector type	RP-SMA	
Protocols	Telnet	
Security	WEP 64/128, WPA	
Authentication / Encryption		
Open / no encryption		
Open / WEP		
WPA Pre-shared key / TKIP		
WPA Pre-shared key / CCMP (a.k.a. WPA2)		
Optional data logger with real-time clock		
Logged parameters	max. three with trend/min./max. values	
Logging interval	10 sec. (fixed)	
Max. logging period	4 years, 5 months	
Logged points	13.7 million points per parameter	
Battery lifetime	min. 5 years	
Display	LCD with backlight, graphical trend display of any parameter	
Menu languages	English, Chinese, Finnish, French, German, Japanese, Russian, Spanish, Swedish	

Mechanics

Cable bushing	M20x1.5 for cable diameter 8 ... 11mm/0.31 ... 0.43"
Conduit fitting	1/2" NPT
User cable connector (optional)	M12 series 8-pin (male)
option 1	female plug with 5 m (16.4 ft.) black cable
option 2	female plug with screw terminals
USB-RJ45 Serial Connection Cable	219685
Probe cable diameter	5.5 mm
Standard probe cable lengths	2 m, 5 m or 10 m
	(Additional cable lengths available, please see order forms for details)
Housing material	G-ALSi 10 Mg (DIN 1725)
Housing classification	IP 66
	IP65 (NEMA4X) with local display
Weight	
depending on selected probe, cable and modules	1.0 – 3.0 kgs

Dimensions

Dimensions in mm (inches)

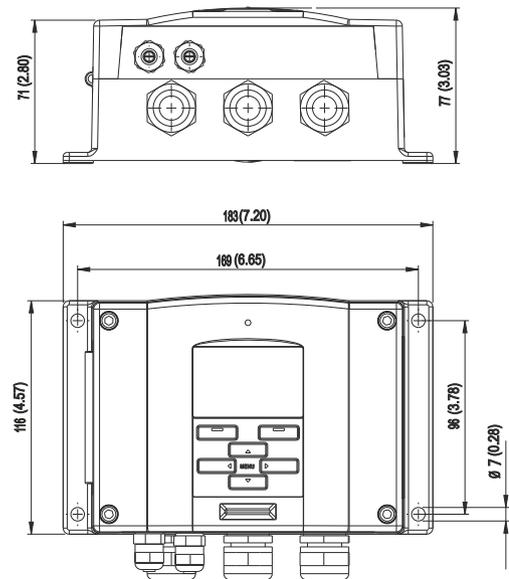

DRYCAP® is a registered trademark of Vaisala.



TYPE APPROVED PRODUCT
CERTIFICATE NO.: A-13529

VAISALA

www.vaisala.com

Please contact us at
www.vaisala.com/requestinfo



Scan the code for
more information

Ref. B210952EN-D ©Vaisala 2013
This material is subject to copyright protection, with all copyrights retained by Vaisala and its individual partners. All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of Vaisala is strictly prohibited. All specifications — technical included — are subject to change without notice.

