

Portable Indoor Air Quality CO₂ Meter/Datalogger

Measures Carbon Dioxide (CO₂), Temperature, Humidity, Dew Point, and Wet Bulb
And calculates statistical 8 hour and 15 minute time weighted averages

Features:

TRANSCAT


Visit us at Transcat.com!

35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001

- Checks for Carbon Dioxide (CO₂) concentrations
- Calculates statistical weighted averages of TWA (8 hour time weighted average) and STEL (15 minute short term exposure limit)
- Maintenance free NDIR (non-dispersive infrared) CO₂ sensor
- Measurement ranges:
 - CO₂: 0 to 5,000ppm
 - Temperature: 14 to 140°F (-10 to 60°C)
 - Humidity: 0.0 to 99.9%
- User programmable audible alarm
- Backlit triple LCD display
- Built-in RS-232 interface for capturing readings on PC
- Data acquisition software and cable included to record and document CO₂, Humidity and Temperature data
- Optional 33% and 75% RH calibration bottles (RH300-CAL)
- Complete with software and cable, 4 AA batteries, and carrying case

Applications:

- Check air quality in schools, office buildings, greenhouses, hospitals and anywhere that high levels of carbon dioxide are generated

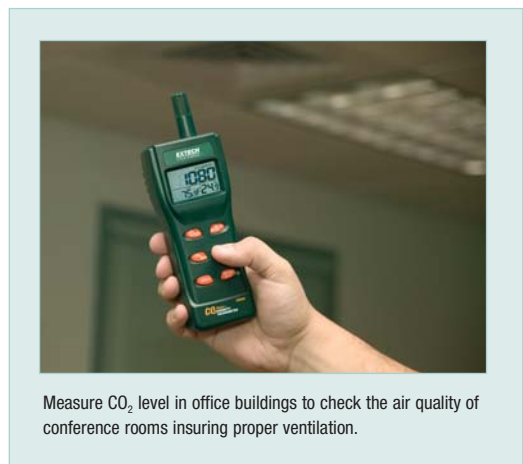

Measure CO₂ level in office buildings to check the air quality of conference rooms insuring proper ventilation.

Ordering Information:

- C0250**Portable Indoor Air Quality CO₂ Meter/Datalogger
RH300-CAL33% and 75% RH Calibration Kit

| Specifications | |
|-----------------------------------|--------------------------------|
| Carbon Dioxide (CO ₂) | 0 to 5,000ppm |
| Resolution | 1ppm |
| Temperature | 14 to 140°F (-10 to 60°C) |
| Resolution | 0.1°F/°C |
| Humidity | 0.0 to 99.9% |
| Resolution | 0.1% |
| Wet Bulb and Dew Point | Calculated |
| Dimensions | 7.9x2.8x2.2" (200 x 70 x 57mm) |
| Weight | 6.7oz (190g) |

