


CRYSTAL
engineering corporation



Crystal Pressure Fittings™

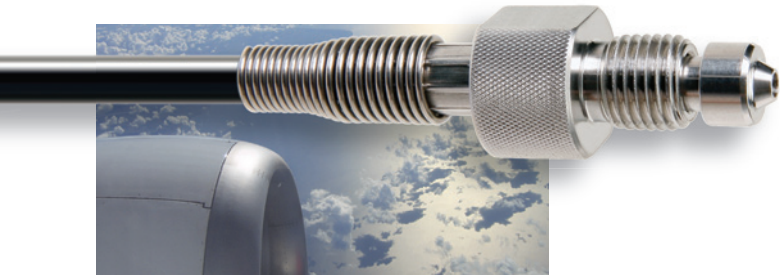


Fast, Safe
Leak Free
Connections




Crystal Engineering's Revolutionary CPF System

■ ■ ■ **Introducing a revolutionary fitting system for fast, safe, and leak free connections.** When CPF fittings are connected together, no tools are required – only your fingers – for working pressure up to 10 000 PSI/ 700 bar/ 70 MPa. If you need a metal to metal seal (for media compatibility), just use a wrench! ■ Unlike other proprietary fitting systems, CPF can be used with standard, off-the-shelf medium pressure fittings from Autoclave, HiP and others - without the need for special conversion fittings.

CPF fittings work to create a hand-tight 10 000 PSI/700 bar/70 MPa seal!

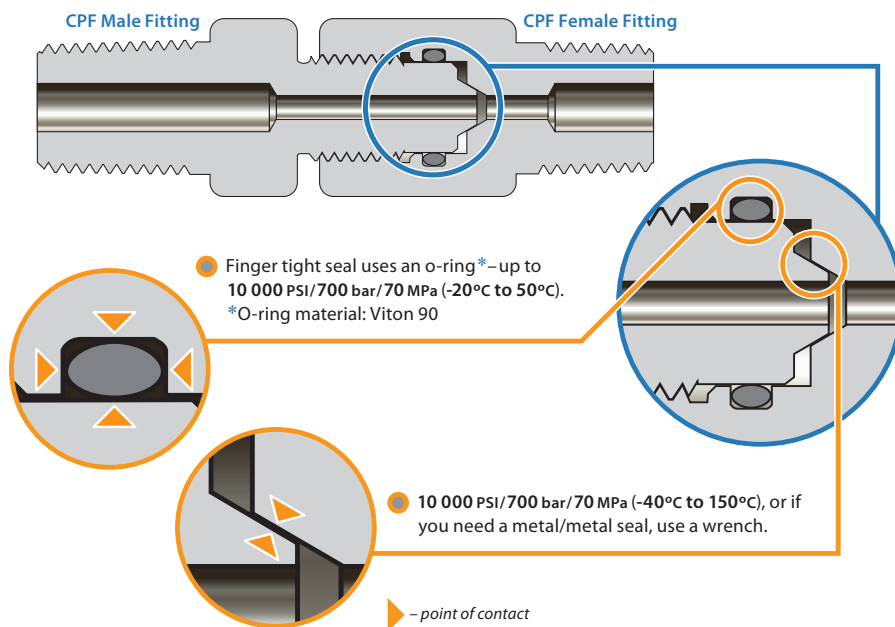

Non-CPF fittings

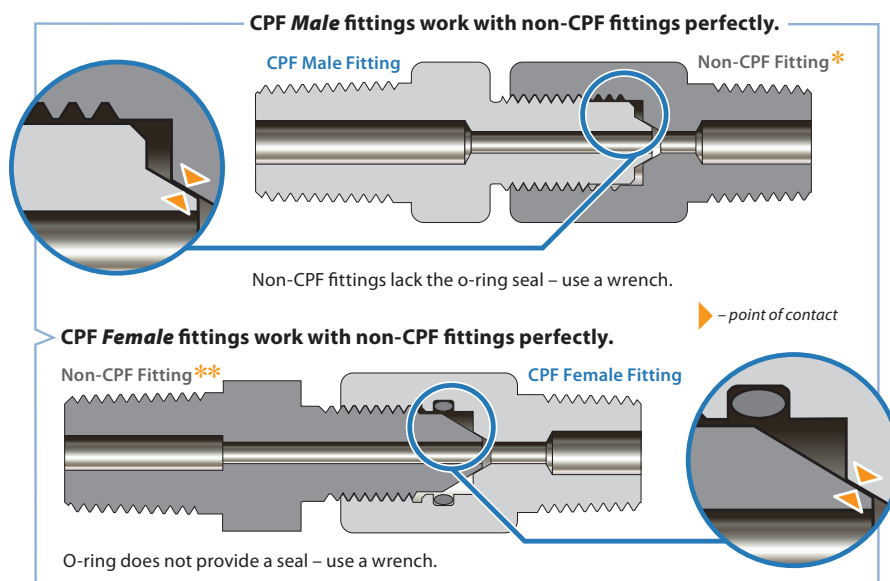

* HiP: 1/4" Female Medium Pressure (LF4 series) ■ Autoclave Engr: 1/4" Female Medium Pressure (SF250CX female series)

** HiP: 1/4" Male Medium Pressure (LM4 series) ■ Autoclave Engr: 1/4" Male Medium Pressure (SF250CX male series)

Patent Pending

Key Features and Benefits

Fittings

- Finger-tight to a working pressure of 10 000 PSI/ 700 bar/ 70 MPa (-20°C to 50°C).
- Wrench-tight to a working pressure of 10 000 PSI/ 700 bar/ 70 MPa (-40°C to 150°C).
- Crystal's innovative interchangeable design allows wrench tight coupling to a working pressure of 10 000 PSI/ 700 bar/ 70 MPa with HiP* and Autoclave Engineers† medium pressure (1/4") series fittings and adapters.
- Laser marked for clear fitting identification.
- Safety weep hole audibly alerts you of a pressurized connection (a whistling or seeping noise to indicate that some manner of pressure still exists within the fitting).
- Cannot be mistaken for NPT.

* HiP is High Pressure Equipment Company.

† Autoclave Engineers Fluid Components is a division of Snap-tite, Inc.


Hoses

- Factor Of Safety (FOS) on 10 000 PSI/ 700 bar/ 70 MPa working pressure system is 4:1 versus competitors FOS of 2.5:1.
- Quality construction using 316 Stainless Steel fittings on Polyamide core hose.
- Suitable for hydraulic and pneumatic applications.
- Flexible hose construction (minimum bend radius: 1.0" [25mm]).
- 0.08" (2mm) minimum internal diameter.
- Purpose-designed for calibration.
- Hose temperature rating is -20°C to 50°C.


■ **CRYSTAL Engineering's CPF System is engineered and designed in the USA.**

Finger-tight to a working pressure of 10 000 PSI/700 bar/70 MPa (-20°C to 50°C) Wrench-tight to a working pressure of 10 000 PSI/700 bar/70 MPa (-40°C to 150°C)*

Male – Male Hose System

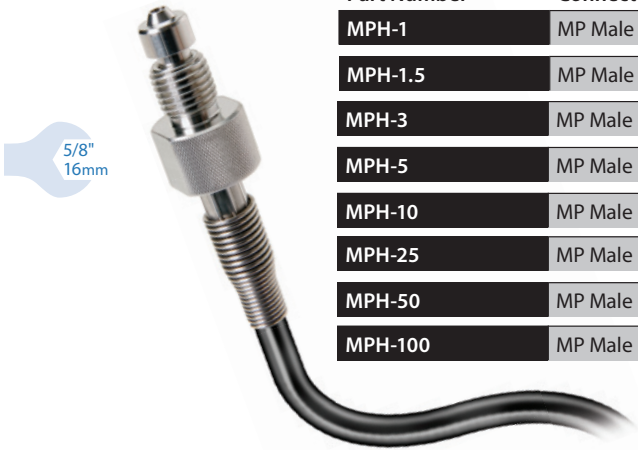

Part Number	Connector Type	Special Attributes
MPH-1	MP Male	1 meter (3 ft.) 10 000 PSI working pressure
MPH-1.5	MP Male	1.5 meters (5 ft.) 10 000 PSI working pressure
MPH-3	MP Male	3 meters (10 ft.) 10 000 PSI working pressure
MPH-5	MP Male	5 meters (16 ft.) 10 000 PSI working pressure
MPH-10	MP Male	10 meters (33 ft.) 10 000 PSI working pressure
MPH-25	MP Male	25 meters (82 ft.) 10 000 PSI working pressure
MPH-50	MP Male	50 meters (164 ft.) 10 000 PSI working pressure
MPH-100	MP Male	100 meters (328 ft.) 10 000 PSI working pressure




* Male–Male Hose System is wrench-tight to a working pressure of 10 000 PSI/700 bar/70 MPa (-20°C to 50°C)

Male – Male CPF to CPF Adapter




Part Number	Connector Type	Special Attributes
MPM-MPM	MP Male	Hose substitution; self supporting fitting for nVision



Female - Female CPF to CPF Adapter




Part Number	Connector Type	Special Attributes
MPF-MPF	MP Female	Ideal for connecting two hoses or MPM (male CPF) fittings

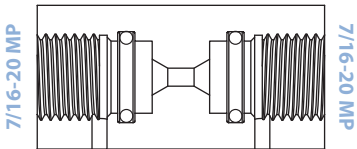

GaugeCalXP Adapter Plate



Part Number	Connector Type	Special Attributes
MPF-GC	GaugeCalXP	Convert GaugeCalXP to CPF system

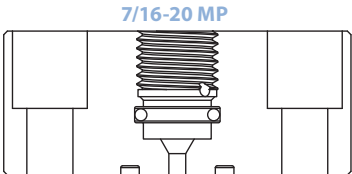

CPF Fittings: Finger-tight to 10000 PSI


Finger-tight to a working pressure of 10 000 PSI/700 bar/70 MPa (-20°C to 50°C) Wrench-tight to a working pressure of 10 000 PSI/700 bar/70 MPa (-40°C to 150°C)

Female Tee Union



3/4"
19mm

Part Number	Connector Type	Special Attributes
MPF-MPFTU	MP Female	Connect multiple MPM (male CPF) fittings

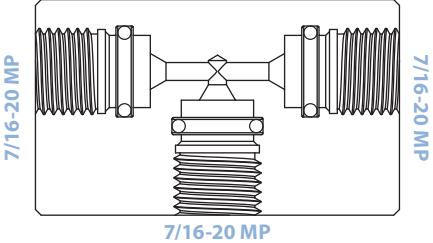

7/16-20 MP

7/16-20 MP

7/16-20 MP


Female - Female Bulkhead Mount



15/16"
24mm

1"
26mm

Part Number	Connector Type	Special Attributes
MPF-MPFBULK	MP Female	Bulkhead mount the CPF fitting system. Works with Swagelok Bulkhead Retainers if counter rotation needed. 20mm thru hole required.

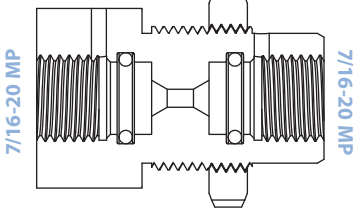

7/16-20 MP


7/16-20 MP

Cap



5/8"
16mm

Part Number	Connector Type	Special Attributes
MPF-CAP	Cap	Ideal for capping hoses and MPM (male CPF) fittings




7/16-20 MP

Male Plug



5/8"
16mm

Part Number	Connector Type	Special Attributes
MPM-PLUG	MP Male Plug	Plug any MPF (female CPF) fitting



7/16-20 MP


CPF Side finger-tight to a working pressure of 10 000 PSI/700 bar/70 MPa (-20°C to 50°C) NPT/BSP Side wrench-tight to a working pressure of 10 000 PSI/700 bar/70 MPa (-40°C to 150°C)

Female-Male CPF to NPT



5/8"
16mm

Part Number	Connector Type	Special Attributes
MPF-1/8MPT	1/8" MNPT	Connect quickly to 30 Series & ComboPump products
MPF-1/4MPT	1/4" MNPT	Connect quickly with Transmitters, GaugeCalXP (NPT), and HydraulicPump products




Male-Male CPF to NPT



5/8"
16mm

Part Number	Connector Type	Special Attributes
MPM-1/4MPT	1/4" MNPT	Connect your nVision to a GaugeCalXP (NPT)




Female - Female CPF to BSP Adapters



See
Table*

Part Number	Connector Type	*Wrench Size	Special Attributes
MPF-1/8BSPF	G 1/8	20mm Hex	Designed to conform to EN 837-1 and utilizes parallel threads per ISO 228
MPF-1/4BSPF	G 1/4	20mm Hex	
MPF-3/8BSPF	G 3/8	25mm Hex	
MPF-1/2BSPF	G 1/2	30mm Hex	

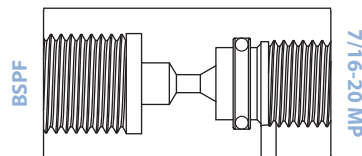


ComboPump 90° CPF to NPT Adapter



3/4"
19mm

Part Number	Connector Type	Special Attributes
MPF-1/8MPT90	1/8" MNPT	Use this for easier connections in tight spaces such as on the ComboPump




Female- Female CPF to NPT



3/4"
19mm

Part Number	Connector Type	Special Attributes
MPF-1/4FPT	1/4" FNPT	Connect with M1, XP2i Series products




■ ■ ■ Quick Test Fittings: Finger-tight to 5 000 PSI

Finger-tight to a working pressure of 5 000 PSI/350 bar/35 MPa (-20°C to 50°C)

Quick Test Female (to interface with Male NPT fittings)



Part Number	Connector Type	Special Attributes
MPF-1/8QTF	1/8" FNPT QT	—
MPF-1/4QTF	1/4" FNPT QT	Connect quickly with M1, XP2i Series products
MPF-1/2QTF	1/2" FNPT QT	—
MPF-M20QTF	M20X1.5 QT Female	—

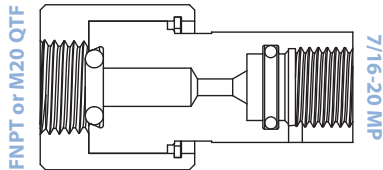


Quick Test NPT Kit Quickly connect to an array of NPT fittings

Part Number	
4013	Kit contains: MPF-1/8QTF (Qty 1), MPF-1/4QTF (Qty 1), MPF-1/2QTF (Qty 1)

Quick Test Male (to interface with Female NPT)




Part Number	Connector Type	*Wrench Size	Special Attributes
MPF-1/8QTM	1/8" MNPT QT	5/8" (16mm)	Connect to 30 Series & ComboPump products
MPF-1/4QTM	1/4" MNPT QT	3/4" (19mm)	Connect with Transmitters, GaugeCalXP (NPT), and HydraulicPump products

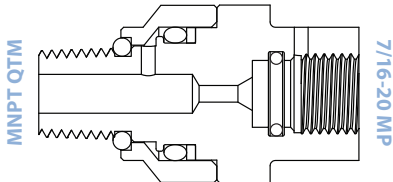

Tube Adapters



Part Number	Connector Type	Special Attributes
MPF-1/4TBM	1/4" M Tube	CPF for Swagelok*-type tube systems
MPF-3/8TBM	3/8" M Tube	CPF for Swagelok*-type tube systems
MPF-1/2TBM	1/2" M Tube	CPF for Swagelok*-type tube systems




* Swagelok is a registered trademark of the Swagelok Company

Quick Connect Adapter



Part Number	Connector Type	Special Attributes
MPF-QCN	Quick Connect Nut	Connect quickly to Quick Connect threaded fittings




Transmitter Bleed Valve Adapter (5/16"-24 UNF)



5/8"
16mm

Part Number	Connector Type	Special Attributes
MPF-5/16TRM	5/16"-24 UNF Transmitter Male	CPF for Foxboro, Rosemount & Yokogawa transmitters

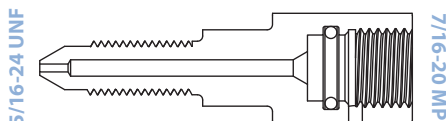


Transmitter Bleed Valve Adapter (1/4"-28 UNF)



5/8"
16mm

Part Number	Connector Type	Special Attributes
MPF-1/4TRM	1/4"-28 UNF Transmitter Male	CPF for Honeywell Transmitters




Female - Male AN4 Adapter



5/8"
16mm

Part Number	Connector Type	Special Attributes
MPF-AN4M	AN4	37° flared tube fitting made to exact AS (formerly AN) specifications. Not for in-flight use.

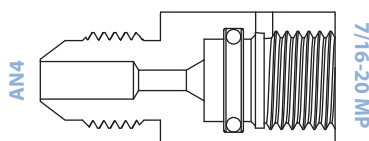

Fitting Kits ■■■

GaugeCalXP Conversion Kit Used to convert GaugeCalXPs to use the CPF fitting system

Part Number	Connects to nVision, XP2i, M1, and 30 Series
4012	Kit contains: MPF-GC (Qty 2), MPF-1/4FPT (Qty 1), MPF-1/8MPT (Qty 1), MPM-MPM (Qty 1)

Quick Test NPT Kit Quickly connect to an array of NPT fittings

Part Number	
4013	Kit contains: MPF-1/8QTF (Qty 1), MPF-1/4QTF (Qty 1), MPF-1/2QTF (Qty 1)

Combo Pump Fitting Kits Includes hose and fittings to connect the Combo Pump to the appropriate gauge or calibrator

Part Number	Connects to the nVision
4018	Kit contains: MPH-1 (Qty 1), MPM-MPM (Qty 1), MPF-1/8MPT (Qty 2), MPF-1/4MPT (Qty 1), MPF-1/8MPT90 (Qty 1)

Part Number	Connects to the XP2i or M1 Gauge
4019	Kit contains: MPH-1 (Qty 1), MPM-MPM (Qty 1), MPF-1/8MPT (Qty 2), MPF-1/4MPT (Qty 1), MPF-1/8MPT90 (Qty 1), MPF-1/4FPT (Qty 1)

Part Number	Connects to the 30 Series Calibrator
4020	Kit contains: MPH-1 (Qty 1), MPM-MPM (Qty 1), MPF-1/8MPT (Qty 3), MPF-1/4MPT (Qty 1), MPF-1/8MPT90 (Qty 1)



CRYSTAL
engineering corporation

TRANSCAT[®]

▶ Visit us at Transcat.com!

35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001

Copyright © 2009 Crystal Engineering Corporation

No part of this document may be reproduced or modified in any form or by any means, electronic or mechanical, without express written permission from Crystal Engineering Corporation.



P/N: 3833—Rev C