

TECHNICAL SPECIFICATION :

Model	DWL2000XY	DWL3000XY	DWL3500XY
Measurement Range (Single Axis Mode)	0.00° to ± 90.00°	0.00° to ± 90.00°	0.000° to ± 20.000°
Measurement Range (Dual Axis Mode)	0.00° to ± 3.00°	0.00° to ± 15.00°	0.000° to ± 10.000°
Resolution	0.01° (175µm/M) (0.002 in/Ft)	0.01° (175µm/M) (0.002 in/Ft)	0.001° (18µm/M) (0.0002 in/Ft)
Accuracy	± 0.02° at 0.00° ~ ± 2.00° (349 µm/m) (0.004 in/Ft) (72 arcsec.) ± 0.04° at other angles	± 0.01° at 0.00° ~ ± 10.00° (175µm/M) (0.002 in/Ft) (36 arcsec.) ± 0.03° at other angles	± 0.001° at 0.000° ~ ± 2.000° (18µm/M) (0.0002 in/Ft) (3.6 arcsec.) ± 0.003° at other angles
Repeatability	0.01° (175µm/M) (0.002 in/Ft)	0.01° (175µm/M) (0.002 in/Ft)	0.001° (18µm/M) (0.0002 in/Ft)
Measurement Speed	≤ 3 Sec.	≤ 3 Sec.	≤ 5 Sec.
Vibrometer (Relative g)	-	1.0	2.0
Magnet	No	Yes	No
Display	Colour TFT LCD		
Power Supply*	4 x AAA 1.5V Batteries / USB		
Material	PC ABS / Aluminium		PC ABS / Cast Iron
Connectivity	USB 2.0 Cable (≤ 5 Meter)	USB 2.0 Cable (≤ 5 metre) Bluetooth Industrial Class 1 (≤30 metre) (Optional)	
PC SYNC Software	Professional Edition (Optional)	Basic Edition (Included) Professional Edition (Optional)	Basic Edition (Included) Professional Edition (Optional)
Operating Temperature	-10°C to +50°C (Calibrated for the entire temperature range)		
Storage Temperature	-20°C to +60°C		
Dimension (mm)	188 x 62 x 37		
Nett Weight (Approximate)	580 gram	1100 gram	
User Self Calibration	Yes		
Note :	* Alternative device power can be obtained from External USB Power Source		

Applications :




Biomedical & Pharmaceutical



CNC Machine Alignment



CMM Levelling (Metrology)



Research Laboratory



Semiconductor Production Machines



Aerospace & Defence



Railway & Transportation System

Authorised Distributor:

TRANSCAT

▶ Visit us at Transcat.com!

35 Vantage Point Drive Rochester, NY 14624
Call 1.800.800.5001



Scan QR code or visit www.digipas.com


© 2013 DIGIPAS USA LLC. All Rights Reserved.

Digi-Pas®

A division of VENTURA group of companies



Innovation & Technology Driven™



Traditional Pendulum/Vial methods



Manufacturer Representatives

Digi-Pas® USA (Americas)
DigiPas USA LLC
info@digipasusa.com

Digi-Pas® Singapore
JSB Tech Pte Ltd
info@digipas.com

Digi-Pas® UK (Europe)
Tarax Technology Ltd
info@digipas.co.uk

Digi-Pas® Japan
JSB Tech Japan Co., Ltd
info@digipas.co.jp

Digi-Pas® Germany (Europe)
Heckmann Präzisionstechnik GmbH
info@digipas.de

Digi-Pas® China
Ventura Electronics (Suzhou) Co., Ltd
info@digipaschina.com

Products tested by TÜV SÜD, SGS accredited body to comply with CE, FCC & RoHS, calibrated to conform with UKAS, JIS, NIST & DIN, and manufactured under SGS certified ISO quality standards:



DWL3000XY and DWL3500XY is a 2-Axis High Precision Digital Level & Machinist Level with built-in Vibrometer. These digital levels are embedded with advanced MEMS sensor technology, designed for professional & trade specialist to achieve high accuracy and simultaneous display of angular & vibration measurements. DWL2000XY is an affordable model introduced with basic features.

These digital levels are capable of remote real-time data acquisition, logging & analysis when in sync with PC. It is highly effective when used for installation, setting up and maintenance of high precision CNC machines, test and measuring equipment.

Device Overview

- 2-Axis colour graphic display of angular & vibration measurements
- Real-time digital & analogue display for data logging & analysis
- High resolution of 0.01°(175 µm/M) or 0.001°(18 µm/M) (3.6 arcsec.)
- Built-in Vibrometer for real-time vibration measurement.
- Wireless/USB connectivity for remote data logging & analysis.

Device TFT LCD Displays



Device Features & Icons



ANGLE METER
Real-time colour graphic display for Single/Dual Axis digital & analogue angle measurements & data acquisition, logging on device screen/PC monitor.



VIBRO METER
Real-time colour graphic display for vibration measurement and data logging on device screen/PC monitor.



ALTERNATE ZERO SETTING
Enable user to measure relative angles at a common plane with respect to a reference angle set to zero.



ABSOLUTE LEVEL SETTING
Enables user to perform absolute symmetry readings for both "front" & "reverse" (180 degrees) positions of any measurement angle.



SETTING MENU
Enable User to define various parameters on the device functions.



WIRELESS SYNC (Optional)
Wireless Sync to computer/tablet/smartphone for remote measurement, data acquisition, logging & analysis.




TEMPERATURE COMPENSATED
These instrument/device are temperature calibrated for the entire specified operating temperature range.




3-Points Contact Base

PC Sync Software / Android Apps Sync

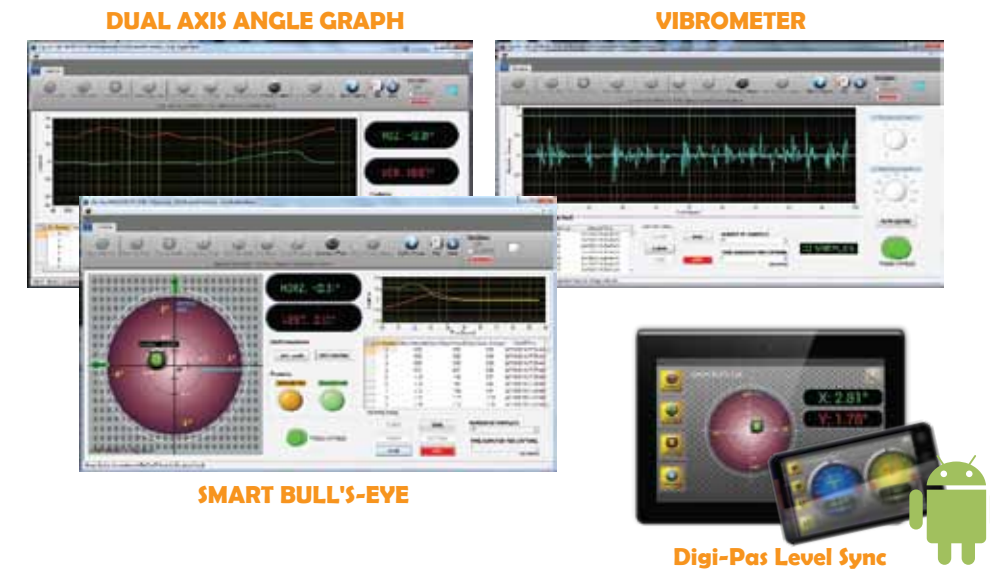

Bluetooth Connectivity Smartphone / Tablet



Software Features


- User-Friendly "Plug & Play" USB Connection for angle & vibration remote measurement, data acquisition, logging & analysis in computer.
- Bluetooth Connectivity (Optional) for wireless remote data acquisition, monitoring & logging.
- Mobile Android Apps "Digi-Pas Level Sync" in Android Tablet and Smartphone.

Advantages of 2-Axis Digital Level

- **SPEED & PRECISION**
Instant 2-Axis simultaneous digital display of high resolution & accuracy providing a comprehensive solution for levelling, alignment & vibration measurements resulting in time saving and quality professional works.
- **CLARITY**
Digital colour graphic & numeric display to enable real-time collection & storage of digital angle/levelling/alignment data for machine commissioning accountability & analysis.
- **EFFECTIVE**
The remote reading Wireless/USB Cable capability via PC/Tablet/Smartphone providing advantages that traditional single axis spirit level is difficult or unable to match. i.e. effectively, only one person is required to level/align a machine.
- **ACCREDITATION**
Instrument accuracy is verified by accredited 3rd party Calibration & Test Service Providers in USA, Japan, UK & Germany and traceable to NIST, JIS, UKAS & DIN under ILAC & A2LA.



Digi-Pas® 2-Axis levelling Utilizing Advanced Digital MEMS Technology



Traditional single axis levelling method (Vial bubble)