



USB TEMPERATURE AND RELATIVE HUMIDITY SENSOR

TRH200

DESCRIPTION

The TRH200 is specifically designed for environmental temperature and humidity acquisition. Its exposed sensor allows a more precise temperature measurement of hard surfaces. With its factory calibrated, linearized and temperature-compensated digital sensor chip, it is field interchangeable. Thanks to its precision electronics, extremely small variations in temperature and humidity can be detected using a standard USB port. This product has a typical accuracy at 25°C of $\pm 0.3^\circ\text{C}$ and $\pm 2\% \text{RH}$.



APPLICATIONS

- OEM
- Surface temperature measurement
- Server rooms
- Manufacturing
- Pre-certification
- LIMS integration
- Humidity control
- Scientific research
- Building automation
- Engineering and R&D
- Environmental chamber

INSTALLATION TIME

Less than 10 minutes

UNIQUE SERIAL NUMBER

Each unit is assigned a unique serial number allowing for traceability and certification

FREE DAQ SOFTWARE

Real-time data visualization and logging

DATA INTEGRATION

Command-line tools utilities for direct data access and integration

OPTIONS

- Virtual COM Port (VCP) communication protocol
- 3-point user calibration mechanism

ALSO AVAILABLE

Traceability certificates

SPECIFICATIONS

Parameter	Condition	Value	Units
Temperature			
Probe operating range ^[1]	–	-40 to 70	°C
Accuracy	Typ., at 25°C	± 0.3	°C
Accuracy	Max., -40 to 125°C	± 2	°C
Resolution	Typ.	0.01	°C
Repeatability	Typ.	0.1	°C
Response time	t63%	5	s
Factory calibrated	Individually ^[2]	Yes	–
Long term drift	Normal condition	<0.05	°C/yr
Relative humidity			
Probe operating range ^[3]	Non-condensing	0 to 100	%RH
Accuracy	Typ., 25°C, 20 to 80 %RH	± 2	%RH
Accuracy	Max., 25°C, 0 to 100 %RH	± 4	%RH
Resolution	Typ.	0.01	%RH
Temperature coefficient	10°C to 60°C, 50 %RH	0.05	%RH/°C
Temperature coefficient	10°C to 60°C, 90 %RH	0.15	%RH/°C
Repeatability	–	0.2	%RH
Hysteresis	–	± 1	%RH
Factory calibrated	Individually ^[2]	Yes	–
Long term drift	Normal condition	<0.5	%RH/yr


SPECIFICATIONS

Parameter	Condition	Value	Units
Power supply			
Voltage	Powered through a USB port	5	V
Current consumption	At 5V	≤ 18	mA
Mechanical			
Dimensions	See schema below	–	–
Colour	–	Cyan	–
Weight (without USB cable)	–	50	g
Housing and USB cable			
Temperature operating range	–	0 to 70	°C
Humidity operating range	Non condensing	10 to 90	%RH
Material	–	ABS	–
IP rating ^[3]	–	51	–
System galvanic isolation	–	None	–
USB cable length	–	1 (3)	m (ft)
Miscellaneous			
ADC resolution	–	14	bits
Long-term stability	–	Yes	–
Temperature compensated	By the manufacturer	Yes	–
Lifetime	–	5	years


^[1] Only if cable is not moved/flexed while the temperature is below 0°C.

^[2] Each sensor is individually conditioned by the manufacturer of the semi-conductor sensor chips, in the best stable condition and their correction coefficients are recorded in each of them.

^[3] If water condensation or splashing is possible, it is recommended to install the probe pointing down to reduce the risk of water build-up in the sensor. If water splashing is possible, protect the sensor and cable converter using extra precautions. Extra housing may be required depending on the application.

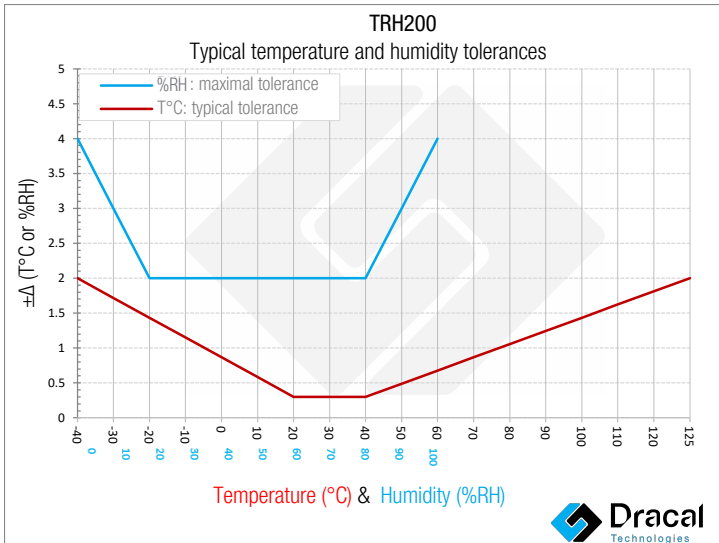

PRODUCT DIMENSIONS

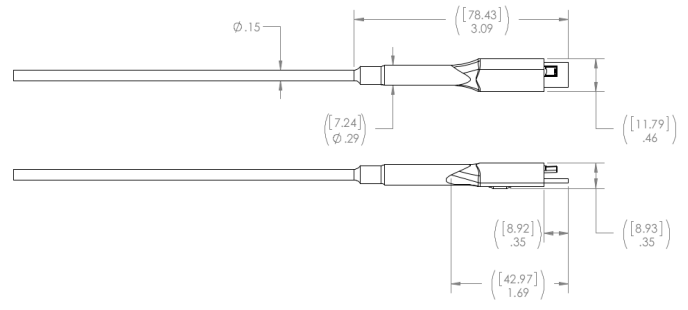

Dimensions are in inches [mm]

CAUTION: Keep in mind that electromagnetic interferences (EMI) may adversely reduce the precision of the sensor. Avoid using this unit close to EMI sources such as transformers, high voltage and fluorescent light.

NOTE: This product is not waterproof and must be protected if contact with water is possible. If the probe is inadvertently splashed or submerged in water for a few seconds, unplug the unit, shake it up and let it dry.

TIP: Avoid installing the sensor in a location where considerable vibrations may be present. Large vibrations can introduce extra inaccuracy in the pressure readings.

Available Channel(s)

As displayed in our logging software

CHANNEL ID*	DESCRIPTION	TYPE	NATURE
00	CC2 Relative Humidity	Relative Humidity	Real
01	CC2 Temperature	Temperature	Real
02	Dew point	Dew point	Virtual
03	Humidex	Humidex	Virtual
04	Heat index	Heat index	Virtual

* Channel Id as it appears in QTenki. Virtual channel Id differ in QTenki and usbtenkiget.

ORDERING

PRODUCT(S)

PART NUMBER	OPTION	DESCRIPTION
601030	USB-TRH200	USB temperature and relative humidity sensor
603030	VCP-TRH200	USB temperature and relative humidity sensor - with VCP mode
608030	USB-TRH200-CAL	USB temperature and relative humidity sensor - calibratable

TRACEABILITY CERTIFICATE(S)

NT1WT	1-point temperature certificate for one (1) unit
NT2WT	2-point temperature certificate for one (1) unit
NT3WT	3-point temperature certificate for one (1) unit
NT4WT	4-point temperature certificate for one (1) unit
NT1WH	1-point relative humidity certificate for one (1) unit
NT2WH	2-point relative humidity certificate for one (1) unit
NT3WH	3-point relative humidity certificate for one (1) unit
NT4WH	4-point relative humidity certificate for one (1) unit

Warning: This product is not designed for use in, and should not be used for, human applications.

Note: While every effort has been made to ensure accuracy in this publication, no responsibility can be accepted for errors or omissions.

Note: Data may change without notification, and you are strongly advised to obtain copies of the most recently issued datasheet.

Sales:
sales@dracal.com

Visit us at:
www.dracal.com

General Inquiries:
info@dracal.com

Dracal Technologies Inc.
7900 boul. Taschereau
Édifice A, suite 204
Brossard, QC, Canada
J4X 1C2

Technical Support:
support@dracal.com