


# Hydraulic Wedgie and Spread Cylinders


▼ Shown clockwise from top: **WR15, WR5, A92**




- Single-acting, spring return
- **WR15:** For long stroke spreading applications
- **WR5:** For use in very confined work areas
- **A92\*:** Spreader attachment screws onto RC-Series 10-ton cylinders (except RC101)\*



**WR5**

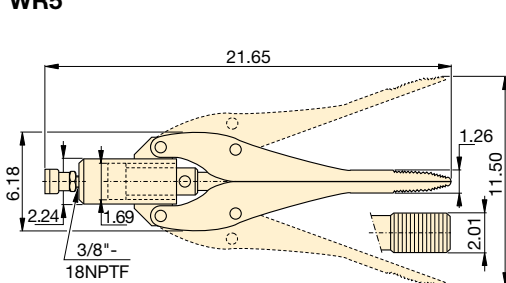

**WR15**



**A92\***

Spreader Capacity	Tip Clearance	Model Number	Maximum Spread	Cylinder Effective Area	Oil Capacity	Wt.
(ton)	(in)		(in)	(in <sup>2</sup> )	(in <sup>3</sup> )	(lbs)
1.00	0.50	<b>WR5</b>	3.70	1.00	0.61	5.0
0.75	1.26	<b>WR15</b>	11.50	2.25	3.91	25.0
1.00	1.38	<b>A92*</b>	6.25	–	–	8.0

\* Maximum system pressure must be limited to half the rated pressure (5000 psi)

## A, WR Series

Capacity:

**0.75 - 1.00 ton**

Tip Clearance:

**0.50 - 1.38 inches**

Maximum Spread Range:

**3.70 - 11.50 inches**

Maximum Operating Pressure:

**10,000 psi**



### RC-Series TRIO Cylinders

10-ton RC-Series TRIO cylinders (except RC101) fit into A92 Spreader attachment.

Page: **6**



### Best Match Hand Pump

To power your WR5 and WR15 the **P392** hand pump is an ideal choice.

Page: **86**



### Portable Hydraulic Toolbox Set SWR5PGH

Tool box includes P392 hand pump, gauge adaptor assembly, hose and **WR5**.

Page: **65**

▼ A **WR5** Wedgie cylinder is used to loosen a bridge bearing.

