

# Signal Generator Selection Guide



# Introduction

Keysight Technologies, Inc. offers the widest selection of signal generators from baseband to 67 GHz, with frequency extensions to 1.1 THz. From basic to advanced functionality, each signal generator delivers benchmark performance in its class to address the requirements in design and manufacture of radio transceivers and their components; and applications ranging from low-frequency navigation signals, through cellular mobile radio, to millimeter wave radar, and satellite systems. Each offers synthesized frequency accuracy and stability, excellent calibrated level accuracy, and remote programmability.

Modulation capabilities vary from general-purpose AM, FM and digital I/Q to standard-specific formats such as GSM, W-CDMA, HSPA, LTE, LTE-Advanced, GPS, and WLAN. Keysight provides signal generators in multiple form factors, including benchtop and modular PXI.

This selection guide provides an overview and side-by-side comparisons to help you determine which signal generator is right for you. It is intended to supplement online selection tools available at [www.keysight.com/find/sg](http://www.keysight.com/find/sg).

## Frequency coverage for Keysight signal generators



1. Additional high-performance baseband arbitrary waveform generators with up to 5 GHz analog bandwidth can be found at: [www.keysight.com/find/arbs](http://www.keysight.com/find/arbs)

# Product Categories

## Benchtop and modular PXI signal generators

Benchtop signal generators are well-suited for R&D or design verification, where analysis and troubleshooting benefit from interactive analysis. Benchtop models range from RF to micro-wave with a broad range of capabilities so you can select which generator best suits your needs.

Modular PXI signal generators are ideal for applications that require multi-channel measurement capabilities, fast measurement speed, and a small footprint. They also offer scalability and flexibility to configure solutions with a shared processor, chassis and other modular instruments. The PXI vector signal generator can be used with the same software applications as bench top signal generators, providing measurement consistency and compatibility throughout the product development cycle.

## Vector signal generators

Vector signal generators or digital signal generators have a built-in I/Q modulator to upconvert complex modulation formats such as QPSK and 1024QAM. When combined with an IQ baseband generator, virtually any signal can be emulated and transmitted within the information bandwidth supported by the system.

## Analog signal generators

Analog signal generators supply sinusoidal continuous wave (CW) signals with optional capability to add AM, FM,  $\Phi$ M and pulse modulation. The maximum frequency range for analog signal generators spans from RF to microwave. Most generators feature step/list sweep modes for passive device characterization or calibration.

## Agile signal generators

Agile signal generators are optimized for speed to quickly change frequency, amplitude, and phase of the signal. They also have the unique capability to be phase coherent at all frequencies, all of the time. This attribute, along with extensive pulse modulation and wideband chirp capabilities, is ideal for electronic warfare (EW) and radar applications.

Key Specifications Comparison .....	4
Application and Software Comparison .....	6
Signal Studio Software .....	7
Benchtop	
PSG signal generators .....	8
X-Series signal generators .....	10
RF analog signal generator .....	13
Baseband generator and interface module.....	14
Modular	
PXI signal generators.....	15
Migrating from Legacy Signal Generators .....	17

## Baseband generator and channel emulator

Baseband generators (BBG) output complex I/Q signals such as QPSK, and can have several modes of operation:

- Waveform playback mode to play repetitive signals for component testing
- Real-time mode to transmit non-repeating/dynamic signals for receiver test
- Digital IQ input or output mode to stimulate FPGAs, DACs or ADCs

Channel emulators are used to simulate the medium through which RF waves propagate. They can replicate multi-path and multi-channel fading for SISO or MIMO transceivers typically used to test the sensitivity, throughput or function of devices under test.

## Signal creation software

Signal creation software products enable the generation of a wide range of application-specific test signals using vector signal generators. They can easily create signals to evaluate the performance of radio designs and the components that comprise them under various parametric and functional test conditions at baseband, RF and microwave frequencies. Keysight's Signal Studio software runs on a PC and embedded software runs directly on the signal generator.

## Key Specifications Comparison— Agile and Vector Signal Generators

Specifications	Benchtop					Modular
	UXG	UXG vector	PSG MW	MXG RF	EXG RF	PXI RF
Model number	N5193A	N5194A	E8267D	N5182B	N5172B	M9381A
Performance	****	****	****	****	***	****
Frequency range (min. to max.)	10 MHz to 40 GHz	50 MHz to 20 GHz	100 kHz to 44 GHz	9 kHz to 6 GHz	9 kHz to 6 GHz	1 MHz to 6 GHz
Frequency switching (list mode)	370 ns		9 ms	800 $\mu$ s	800 $\mu$ s	< 10 to 240 $\mu$ s
Sweep mode	Normal, list, fast CW	Streaming, chirp	Step, list, ramp	Step, list	Step, list	Step, list
Output power (minimum)	-130 dBm	-120 dBm	-130 dBm	-144 dBm	-144 dBm	-130 dBm
Output power (maximum; at 1 GHz)	+10 dBm	+11 dBm	+22 dBm (at 20 GHz)	+24 dBm	+21 dBm	+19 dBm
Level accuracy (at 1 GHz)	$\pm$ 1.5 dB	$\pm$ 2.5 dB	$\pm$ 0.8 dB (at 20 GHz)	$\pm$ 0.6 dB	$\pm$ 0.6 dB	$\pm$ 0.4 dB
SSB phase noise (at 1 GHz; 20 kHz offset)	-144 dBc/Hz (at 10 kHz offset)	-144 dBm/Hz	-143 dBc/Hz (at 10 kHz offset)	-146 dBc/Hz	-122 dBc/Hz	-122 dBc/Hz
Harmonics (at 1 GHz)	-50 dBc	-60 dBc	-55 dBc	-35 dBc	-35 dBc	-34 dBc
Non-harmonics (at 1 GHz)	-70 dBc	-72 dBc	-88 dBc	-96 dBc	-72 dBc	-70 dBc nominal
AM rate	DC to 10 MHz	N/A	DC to 100 kHz	DC to 50 kHz	DC to 50 kHz	6.2 MHz
FM deviation (maximum)	5% of carrier frequency or 600 MHz, whichever is less	N/A	1 to 128 MHz	1 to 16 MHz	2.5 to 40 MHz	1.24 MHz
PM phase deviation (maximum in normal mode)	5% of (carrier frequency)/ (modulation frequency) or 600 MHz/(modulation frequency) or $12\pi$ , whichever is less	N/A	1 to 800 rad	0.5 to 8 rad	1.25 to 20 rad	10 rads
Narrow pulse width	10 ns	2 ns	20 ns	20 ns	20 ns	20 ns
EVM (LTE)	N/A	N/A	0.8%	0.2%	0.2%	0.32%; 0.25% @ 900 MHz
ACPR (3GPP W-CDMA TM1 64 DPCH)	N/A	N/A	-64 dBc (16QAM, 10 GHz)	-73 dBc	-73 dBc	-70 dBc
Internal baseband generator RF BW	N/A	1.6 GHz	80 MHz	160 MHz	120 MHz	160 MHz
External I/Q modulator RF BW	N/A	N/A	Up to 2 GHz	Up to 200 MHz	Up to 200 MHz	N/A
Waveform playback memory	N/A	Waveform playback and real-time	64 Msa	1024 Msa	512 Msa	1024 Msa
Baseband generator mode	N/A	Standard	Waveform playback and real-time IQ	Waveform playback and real-time	Waveform playback and real-time	Waveform playback
Phase coherent frequency switching	Standard	1.6 GHz	N/A	N/A	N/A	N/A
Wide chirp capability	10% of carrier frequency	Standard	N/A	N/A	N/A	N/A
Pulse descriptor word capability	Standard	Standard	N/A	N/A	N/A	N/A



## Key Specifications Comparison—Analog Signal Generators

Specifications	Benchtop							Modular
	PSG MW	MXG MW	EXG MW	PSG RF	MXG RF	EXG RF	RF	PXI CW source
<b>Model number</b>	<b>E8257D</b>	<b>N5183B</b>	<b>N5173B</b>	<b>E8663D</b>	<b>N5181B</b>	<b>N5171B</b>	<b>N9310A</b>	<b>M9380A</b>
Performance	*****	****	****	****	****	***	**	**
Frequency range (min. to max.)	100 kHz to 70 GHz	9 kHz to 40 GHz	9 kHz to 40 GHz	100 kHz to 9 GHz	9 kHz to 6 GHz	9 kHz to 6 GHz	9 kHz to 3 GHz	1 MHz to 6 GHz
Frequency switching (list mode)	9 ms	600 $\mu$ s	600 $\mu$ s	9 ms	800 $\mu$ s	800 $\mu$ s	10 ms	5 ms
Sweep mode	list, step, ramp	list, step	list, step	list, step, ramp	list, step	list, step	list, step	N/A
Output power (minimum)	-135 dBm	-130 dBm	-130 dBm	-135 dBm	-144 dBm	-144 dBm	-127 dBm	-130 dBm
Output power (at 1 GHz)	+26 dBm (at 20 GHz)	+20 dBm (at 20 GHz)	+20 dBm (at 20 GHz)	+23 dBm	+24 dBm	+21 dBm	+13 dBm	+19 dBm
Level accuracy	$\pm$ 0.8 dB (at 20 GHz)	$\pm$ 0.7 dB (at 10 GHz)	$\pm$ 0.7 dB (at 10 GHz)	$\pm$ 0.6 dB	$\pm$ 0.6 dB	$\pm$ 0.6 dB	$\pm$ 1.0 dB	$\pm$ 0.4 dB
SSB phase noise (1 GHz, 20 kHz offset)	-126 dBc/Hz (at 10 GHz, 10 kHz offset)	-124 dBc/Hz (at 10 GHz)	-101 dBc/Hz (at 10 GHz)	-143 dBc/Hz (at 10 kHz offset)	-146 dBc/Hz	-122 dBc/Hz	-95 dBc/Hz	-122 dBc/Hz
Harmonics (at 1 GHz)	-55 dBc	-55 dBc (at 10 GHz)	-55 dBc (at 10 GHz)	-55 dBc	-35 dBc	-35 dBc	-30 dBc	-29 dBc
Non-harmonics (at 1 GHz)	-88 dBc	-100 dBc	-72 dBc	-88 dBc	-96 dBc	-72 dBc	-50 dBc	-70 dBc
AM rate	DC to 100 kHz	DC to 100 kHz	DC to 100 kHz	DC to 100 kHz	DC to 50 kHz	DC to 50 kHz	20 Hz to 20 kHz	N/A
FM deviation (maximum)	1 to 128 MHz	1 to 128 MHz	2.5 to 320 MHz	1 to 16 MHz	1 to 16 MHz	2.5 to 40 MHz	100 kHz	N/A
PM phase deviation (maximum, in normal mode)	1 to 1280 rad	0.5 to 64 rad	1.25 to 160 rad	1 to 160 rad	0.5 to 8 rad	1.25 to 20 rad	10 rad	N/A
Narrow pulse width	20 ns	20 ns	20 ns	20 ns	20 ns	20 ns	100 $\mu$ s	N/A

# Applications, Core Capabilities, and Software Comparison

Applications and signal creation software	Benchtop			Modular	Benchtop						
	UXG Agile	UXG Vector	PSG MW Vector	MXG and EXG RF	PXI RF	PSG MW Analog	MXG and EXG MW	MXG and EXG RF	PSG RF	N9310 RF	PXB Baseband
<b>Instrument embedded capabilities</b>											
USB power meter				●			●	●			
Step/list sweep	●	●	●	●	●	●	●	●	●	●	●
Ramp sweep		●	●			●			●		
AM, FM, PM, pulse	●	●	●	●	●	●	●	●	●	●	
LF function generator	●		●	●		●	●	●	●	●	
Real-time custom modulation (PSK, QAM, FSK)			●	●							
Phase noise impairments				●							
Multitone, NPR			●	●							
Noise (AWGN)			●	●							●
Pulse Train	●	●		●			●	●			
BERT				●							
<b>SystemVue, MATLAB</b>	●	●	●	●	●						●
<b>Real-time fading</b>											●
<b>Signal Studio software</b>											
<b>Cellular communications</b>											
LTE & LTE-Advanced FDD/TDD, W-CDMA/HSPA+, cdma2000®, 1xEV-DO, GSM/EDGE/Evo, TD-SCDMA			●	●	●						●
<b>Wireless networking</b>											
WLAN 802.11a/b/g/j/p/n/ac/ah, Mobile WiMAX™, Bluetooth®			●	●	●						●
Fixed WiMAX			●	●	●						
<b>Audio/video broadcast</b>											
DVB-T/H/T2/S/S2, DVB-C (J.83 Annex A/C), J.83 Annex B (DOCSIS DS), ISDB-T/Tmm, ATSC, ATCS-M/H, DTMB (CTTB), CMMB			●	●	●						●
T-DMB, DAB/DAB+/DMB-audio, FM stereo with RDS/RBDS				●	●						●
<b>Detection, positioning, tracking, navigation</b>											
Pulse building			●	●							
Multitone distortion, NPR			●	●							●
GPS, GLONASS, Galileo, Beidou, SBAS, QZSS			●	●	●						●
<b>Threat simulation</b>											
Multi-emitter scenario generation	●	●									
<b>Wideband waveform center software</b>											
Wireless HD, WiGig, 802.11ad			●								

# Signal Studio Software

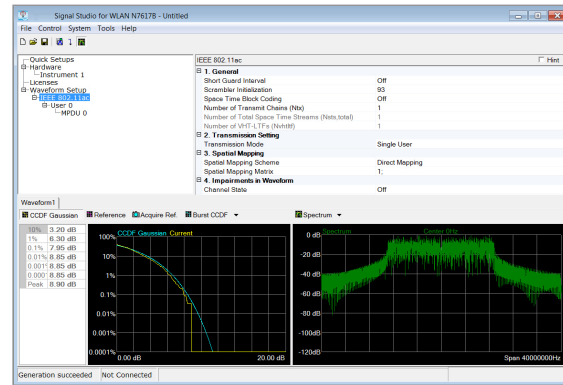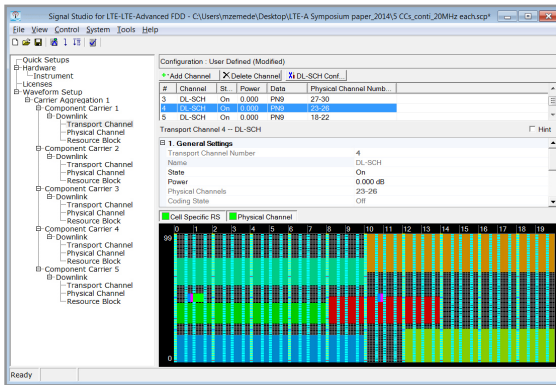

## Simplify signal creation

Whether you are working on a single radio format or integrating multiple formats into a single device, easy access to the right test signals streamlines validation and helps ensure interoperability. Accelerate your work with Keysight Signal Studio software, a flexible suite of signal-creation tools that reduces the time you spend on signal simulation. Its performance-optimized reference signals, validated by Keysight, enhance the characterization and verification of your devices.

Configure Signal Studio to match your requirements:

- Choose basic or advanced levels of capability with scalable option structure
- Select the license type that fits your specific use case and budget, including fixed, transportable, and 5- or 50-pack waveforms
- Connect to a wide range of Keysight instruments

Leverage and customize built-in signals with flexible signal generation, additive impairments, graphs, convenient connectivity and automation, and embedded and online documentation. Control your vector signal generator directly from the software GUI and/or instrument front panel.

Connect your vector source to Signal Studio—and simplify signal creation.

## Free Trial License

Free 30-day trials of Signal Studio software are available to evaluate the user interface and generate signals. Redeem a trial license online at

[www.keysight.com/find/SignalStudio\\_trial](http://www.keysight.com/find/SignalStudio_trial)

General purpose

- Jitter injection
- Multitone, NPR
- Waveform download utility
- Power amplifier test
- Custom modulation

Cellular communications

- LTE & LTE-Advanced FDD/TDD
- W-CDMA/HSPA+, cdma2000, 1xEV-DO, GSM/EDGE/Evo, TD-SCDMA
- Test case manager

Wireless connectivity

- WLAN 802.11a/b/g/j/p/n/ac/ad/ah
- DFS
- Mobile WiMax, Fixed WiMax
- Bluetooth, Bluetooth Low Energy
- Wi-SUN 802.15.4g

Audio/video broadcasting

- DVB-T/H/T2/C/S/S2
- ATSC, ATSC-M/H, J.83B (DOCSIS)
- ISDB-T/TSB/TB/Tmm
- DTMB(CTTB), CMMB
- DAB/DAB+/DMB/T-DMB
- AM, FM, FM Stereo RDS/RBDS

Detection, positioning, tracking, and navigation

- Pulse building
- GPS, GLONASS, Galileo, Beidou, SBAS, QZSS, radar

Multi-emitter scenario generation<sup>1</sup>

- Threat simulation
- Angle of arrival
- Kinematics
- Antenna patterns, polarization, scan patterns

[www.keysight.com/find/SignalStudio](http://www.keysight.com/find/SignalStudio)

1. The MESH software is subject to ITAR export controls. For more information, please contact your Keysight sales representative.

# PSG Signal Generators

The PSG is the industry's most trusted microwave signal generator, with thousands of units deployed in hundreds of programs around the world. With metrology-grade performance and evolving capabilities across RF and microwave frequencies, it continues to enable new designs that stay ahead of emerging threats.



PSG microwave signal generator E8267D vector

- Test advanced receivers with realistic wideband radar, EW, and SATCOM waveforms up to 44 GHz
- Flexible, integrated 80 MHz AWG, real-time and baseband generator to simulate cellular, wireless, GPS and custom communications
- Exercise advanced EW, radar, and satellite systems with Signal Studio, a vector PSG, and a wideband AWG such as the Keysight M8190A for up to 2 GHz bandwidth
- Test phased-array systems and direction-finding receivers with multiple phase-coherent signals generated by linking up to 16 vector PSGs

[www.keysight.com/find/E8267D](http://www.keysight.com/find/E8267D)



PSG microwave signal generator E8257D analog

- Meet test system needs across a wide range: 20, 31.8, 40, 50, and 67 GHz models available (add frequency extender modules to cover up to 1.1 THz)
- Test high-power devices and overcome test system losses with options capable of generating more than 1 W (+30 dBm) of output power
- Address the demanding needs of Doppler radar, ADC, and receiver-blocking tests with extremely low phase noise:
  - 91 dBc/Hz at 100 Hz offset and
  - 126 dBc/Hz at 10 kHz offset (10 GHz)
- Test your DUT with the highest quality signals—the PSG combines metrology-grade frequency and level accuracy with excellent distortion and spurious characteristics

[www.keysight.com/find/E8257D](http://www.keysight.com/find/E8257D)

Key specifications	E8267D MW vector	E8257D MW analog
Frequency range (min. to max.)	100 kHz to 44 GHz	100 kHz to 70 GHz
Frequency switching	9 ms	9 ms
Output power (at 20 GHz)	+22 dBm	+26 dBm
Level accuracy	± 0.6 dB	± 0.6 dB
SSB phase noise (10 GHz; 10 kHz offset)	-126 dBc/Hz	-126 dBc/Hz
Harmonics	-55 dBc	-55 dBc
EVM (QPSK)	0.8%	N/A
ACPR (16 QAM)	-64 dBc	N/A
Internal baseband generator RF BW	80 MHz	N/A



## PSG Signal Generator (continued)



### PSG RF signal generator E8663D analog

The E8663D PSG RF analog signal generator provides the industry's lowest phase noise in a commercially-available signal generator. With optional analog modulation (AM, FM,  $\varnothing$ M, and pulse) capability, superior level accuracy, and high output power, the E8663D is the right choice for demanding applications such as radar system development, satellite communications evaluation, or when a very low noise local oscillator or reference signal is needed. Built on the outstanding legacy of the 8663A, the E8663D delivers improved performance and is fully code-compatible with its predecessor for seamless upgrades to existing test systems. Enhanced narrow pulse modulation and high output power are optionally available.

[www.keysight.com/find/E8663D](http://www.keysight.com/find/E8663D)

#### Key specifications

Frequency range (min. to max.)	100 kHz to 9 GHz
Frequency switching	9 ms
Output power	+23 dBm
Level accuracy	$\pm 0.6$ dB
SSB phase noise (1 GHz; 10 kHz offset)	-143 dBc/Hz
Harmonics	-55 dBc

### Millimeter Wave Accessories for the PSG Signal Generator

Millimeter wave sources are essential instruments for developing almost all millimeter-wave systems. Easily extend the frequency range of your E8257D or E8267D PSG signal generators with these multiplier modules from select partners.

Millimeter-wave source modules from OML, Inc.

The E8257DSxx-Series of external, frequency banded millimeter-wave source modules provide synthesized frequency performance, millimeter-wave test signals for waveguide bands from 50 to 500 GHz.



Signal generator frequency extension modules from VDI, Inc.

The E8257DVxx-Series of signal generator frequency extension modules provide high power, synthesized frequency performance millimeter-wave test signals for waveguide bands from 50 GHz to 1.1 THz.



[www.keysight.com/find/sg\\_mmwave](http://www.keysight.com/find/sg_mmwave)

## X-Series Signal Generators

Crafted to create signals capable of testing your very best devices and designs, the X-Series signal generators offer industry-leading performance and low cost of ownership. A proven, scalable platform combined with cost-effective calibration and internal diagnostics allows you to buy the capabilities you need today and easily upgrade to meet future requirements.



### UXG agile signal generator N5193A, N5191A<sup>1</sup>

The N5193A UXG agile signal generator creates realistic multi-emitter threat simulations for EW test. Off the shelf, the UXG is a powerful building block as a dependable LO or a scalable threat simulator that lowers the barriers between new intelligence and up-to-date signal scenarios.

- Using direct digital synthesis (DDS), the UXG can update frequency, amplitude, and phase settings in as little as 180 ns, with built-in phase repeatability.
- The UXG directly accepts pulse descriptor words (PDWs) to quickly and efficiently generate long pulse trains while allowing individual phase control.
- The UXG can simulate advanced radar signals, generating narrow pulses with 90 dB on/off ratio and chirps as wide as 10 to 25 percent of the carrier frequency.

[www.keysight.com/find/N5193A](http://www.keysight.com/find/N5193A)

### UXG agile vector adapter N5194A

To take your lab to the next level, the N5194A UXG agile vector adapter works together with the N5193A to simulate increasingly complex signal environments with enhanced realism and greater confidence.

- Ideal for generating shaped pulses and wideband linear or non-linear chirps
- 2 Gsa/s baseband generator provides 1.6 GHz instantaneous bandwidth
- Built-in solid-state attenuator provides 120 dB agile amplitude range

[www.keysight.com/find/N5194A](http://www.keysight.com/find/N5194A)

Key Specification	N5193A UXG agile signal generator	N5194A UXG agile vector adapter
Frequency range (min to max)	10 MHz to 20 GHz or 40 GHz	50 MHz to 20 GHz
Frequency switching speed	370 ns	1.42 $\mu$ s
Frequency/amplitude/phase update speed	180 ns	170 ns
Output power	-130 to +10 dBm	-120 to +11 dBm
Harmonics	-50 dBc	-60 dBc
Non-harmonics	-70 dBc	-72 dBc
Phase noise	-126 dBc/Hz at 10 GHz carrier, 10 kHz offset	-127 dBc/Hz at 10 GHz carrier, 10 kHz offset
Minimum pulse width	10 ns	2 ns
Baseband generator sample rate	N/A	2 Gsa/s
Baseband generator memory	N/A	6 Gsa

1. Because of the high-performance characteristics of the N5193A UXG, a US export license is required. The N5191A is a modified version of the UXG agile signal generator that provides high performance without requiring an export license. Notable differences include switching speed, minimum pulse width, and chirp bandwidth.

## X-Series Signal Generators (continued)



### MXG microwave signal generator N5183B analog

The MXG is the pure and precise alternative to the analog PSG, with advantages in size and speed. It delivers the performance you need to perform module- and system-level testing—fast—in only two rack units.

- Meet test system needs up to 13, 20, 31.8, or 40 GHz
- Address demanding tests of radar modules and systems with excellent phase noise of  $\leq 124$  dBc/Hz (10 kHz offset) with  $-75$  dBc spurious (at 10 GHz)
- Save space and maintain test rigor with near-PSG performance levels in just two rack units
- Accelerate your calibration process with excellent switching speed of less than 600  $\mu$ s

[www.keysight.com/find/N5183B](http://www.keysight.com/find/N5183B)



### EXG microwave signal generator N5173B analog

The EXG is the cost-effective choice when you need to balance budget and performance. In just two rack units, it provides the essential signals that address parametric testing of broadband filters, amplifiers, receivers, and more.

- Perform basic LO upconversion or CW blocking with low cost coverage to 13, 20, 31.8, or 40 GHz
- Characterize broadband microwave components such as filters and amplifiers with the best combination of output power (+20 dBm at 20 GHz), low harmonics ( $\leq 55$  dBc), and full step attenuation)
- Use as a high-stability system reference with standard high-performance OCXO at an aging rate of less than  $\pm 5 \times 10^{-10}$  parts per day
- Shrink your test stand with optional integrated multifunction generator and USB power sensor interface

[www.keysight.com/find/N5173B](http://www.keysight.com/find/N5173B)

Key specifications	N5183B MXG microwave analog	N5173B EXG microwave analog
Frequency range (min. to max.)	9 Hz to 40 GHz	9 Hz to 40 GHz
Frequency switching	600 $\mu$ s	600 $\mu$ s
Output power (20 GHz)	+20 dBm	+ 20 dBm
Level accuracy (10 GHz)	$\pm 0.7$ dB	$\pm 0.7$ dB
SSB phase noise (10 GHz)	-124 dBc/Hz	-101 dBc/Hz
Harmonics (10 GHz)	-55 dBc	-55 dBc

## X-Series Signal Generators (continued)



### MXG RF signal generators N5182B vector and N5181B analog

To help you reach better performance, the MXG X-Series vector and analog signal generators are fine-tuned to be your “golden transmitter” in R&D. Whether you’re pushing for a linear RF chain or an optimized link budget, the MXG delivers what you need: phase noise, ACPR, channel coding, and much more. Reveal the true performance of your devices and test your designs within and beyond their limits with the MXG.

- Test radar receiver sensitivity or characterize ADC with excellent phase noise
- Characterize nonlinear PA behavior with industry-leading ACPR and output power
- Test 802.11ac with < 0.4% EVM, or characterize multi-carrier PAs with < ± 0.2 dB flatness across 160 MHz bandwidth
- Go beyond standard application requirements with sophisticated real-time and waveform-based Signal Studio software

[www.keysight.com/find/N5182B](http://www.keysight.com/find/N5182B)

[www.keysight.com/find/N5181B](http://www.keysight.com/find/N5181B)

### EXG RF signal generators N5172B vector and N5171B analog

To help you achieve faster throughput and greater uptime, the cost-effective EXG X-Series signal generators are optimized for manufacturing test. With analog and vector models, the EXG provides the signals you’ll need for basic parameter testing of components and functional verification of receivers. Get “just enough” test at the right price with the EXG.

- Maximize test margins on the production line with industry-leading ACPR
- Maximize throughput with < 800 μs simultaneous switching of frequency, power and waveform type
- Enable rapid, accurate tests using Signal Studio’s predefined, standards-based waveforms
- Shrink your test stand with two rack-unit height and integrated multi-function generator and USB power sensor interface

[www.keysight.com/find/N5172B](http://www.keysight.com/find/N5172B)

[www.keysight.com/find/N5171B](http://www.keysight.com/find/N5171B)

Key specifications	MXG RF vector N5182B	MXG RF analog N5181B	EXG RF vector N5172B	EXG RF analog N5171B
Frequency range (min. to max.)	9 kHz to 6 GHz	9 kHz to 6 GHz	9 kHz to 6 GHz	9 kHz to 6 GHz
Frequency switching	800 μs	800 μs	800 μs	800 μs
Output power	+24 dBm	+24 dBm	+21 dBm	+21 dBm
Level accuracy	± 0.6 dB	± 0.6 dB	± 0.6 dB	± 0.6 dB
SSB phase noise (1 GHz; 20 kHz offset)	-146 dBc/Hz	-146 dBc/Hz	-122 dBc/Hz	-122 dBc/Hz
Harmonics	-35 dBc	-35 dBc	-35 dBc	-35 dBc
EVM (LTE)	0.2%	N/A	0.2%	N/A
ACPR (3GPP W-CDMA TM1 64 DPCH)	-73 dBc	N/A	-73 dBc	N/A
Internal baseband generator RF BW	160 MHz	N/A	120 MHz	N/A

# RF Analog Signal Generator



## RF signal generator N9310A analog

The N9310A is a general-purpose RF signal generator covering a frequency range from 9 kHz to 3 GHz. Ideal for manufacturing, education, and service maintenance, it delivers affordable, reliable performance. If your application only requires a simple continuous wave (CW) source, the N9310A RF signal generator provides just enough functionality at the lowest price.


- Optimized for low-cost consumer electronics manufacturing test, education, and service and repair
- Optional I/Q modulator 40 MHz bandwidth (ext. I/Q inputs only)
- USB interface, with flash memory support

[www.keysight.com/find/N9310A](http://www.keysight.com/find/N9310A)

### Key specifications

Frequency range (min. to max.)	9 kHz to 3 GHz
Frequency switching	10 ms
Output power	+13 dBm
Level accuracy	± 1.0 dB
SSB phase noise (1 GHz; 20 kHz offset)	-95 dBc/Hz
Harmonics	-30 dBc

## Baseband Generator and Interface Module

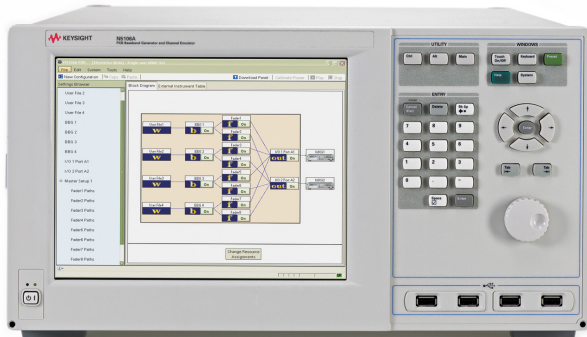

### PXB baseband generator and channel emulator N5106A

The PXB lets you customize test cases and validate designs under real-world conditions with the broadest range of test parameters. Create fully-parameterized signals for established and evolving standards with Keysight Signal Studio. In addition, the PXB lets you model the signal-propagation environment with fully-parameterized, real-time channel emulation (fading). With the largest playback memory available, you can run longer test sequences to better approximate real-world signals. You can also capture signals up to 512 Msa from your own device for post processing.

With less instrumentation to manage, the PXB simplifies test setup. You need only one box for multi-format baseband generation, real-time fading and signal capture. With it, you can construct over 20 configurations to meet your test needs. These configurations, along with external instrument connections, can be redefined in seconds using the PXB user interface.

- Up to 160 MHz modulation and signal capture bandwidth
- 512 Msa playback and signal capture memory per channel
- Up to six BBGs and 16 faders for interference, diversity and MIMO test

[www.keysight.com/find/N5106A](http://www.keysight.com/find/N5106A)



### Digital signal interface module N5102A

The N5102A digital signal interface module provides fast and flexible digital inputs and outputs for the MXG and EXG X-Series vector signal generators, E8267D PSG vector signal generator and N5106A PXB baseband generator and channel emulator. In output mode, you can deliver realistic, complex-modulated signals such as LTE, HSPA, W-CDMA, GPS, WLAN, digital video, custom pulses, and many others directly to your digital devices and subsystems. In the input mode, the interface module ports your digital input to the signal generator's baseband system, providing a quick and easy way of upconverting to calibrated analog IF, RF, or  $\mu$ W frequencies.

In both operating modes, the interface module adapts to your device with the logic type, data format, clock features, and signaling you require. With its 3-meter extension cable and a selection of connector types, the interface module connects easily to your device, in most cases eliminating the need for custom fixtures.

- Up to 400 MHz in serial mode, 200 MHz in parallel mode
- Provision for internal, external, or device clocking
- Independent data input and output rates; adjustable clock phase and skew

[www.keysight.com/find/N5102A](http://www.keysight.com/find/N5102A)

# PXI Signal Generators



## PXIe vector signal generator M9381A

Optimized for RF device design validation and manufacturing test environments, the M9381A PXI VSG delivers a combination of speed, performance, and multi-channel capability. Built on a flexible, scalable modular platform, the M9381A PXI VSG is the low-risk way to manage change and be ready for tomorrow—today.

- Fast amplitude and frequency switching to reduce test time
- Scalable platform fits up to 4 channels in one chassis, and 8 channels in multi-chassis configuration
- Channels time synchronized to within 1 ns and phase coherent to within 1 degree
- Up to 160 MHz RF bandwidth
- Easily integrate into test environments with IVI-COM, IVI-C, LabVIEW, and MATLAB drivers

[www.keysight.com/find/M9381A](http://www.keysight.com/find/M9381A)



## PXIe CW source M9380A

With high output power and accurate amplitude control, the M9380A PXIe CW source is a compact, cost-effective analog source, ideal for LO substitution, interference injection, and wireless component test. With fast PXI architecture and multiple drivers and programmatic interfaces, the M9380A is designed for high-speed automated test.

[www.keysight.com/find/M9380A](http://www.keysight.com/find/M9380A)


### Keysight Quality and Support in PXI

Keep measurement quality while reducing your cost of ownership with Keysight's unique RF modular calibration and fast core exchange strategy. Keysight PXI signal generators are factory calibrated, shipped with ISO-9002, NIST traceable Cal certificate, and include a 1-year warranty.

[www.keysight.com/find/pxi-vsg](http://www.keysight.com/find/pxi-vsg)

Key specifications	M9381A PXIe vector	M9380A PXIe CW source
Frequency range (min. to max.)	1 MHz to 6 GHz	1 MHz to 6 GHz
Frequency switching	< 10 to 240 $\mu$ s	5 ms
Output power (at 1 GHz)	+19 dBm	+19 dBm
Level accuracy	$\pm$ 0.4 to 1 dB	$\pm$ 0.4 to 1 dB
SSB phase noise (1 GHz; 20 kHz offset)	-122 dBc/Hz	-122 dBc/Hz
Harmonics	< -34 dBc	< -29 dBc
EVM (LTE)	0.32%	N/A
ACPR (3GPP W-CDMA TM1 64 DPCH)	-70 dBc	N/A
Internal baseband generator RF BW	160 MHz	N/A

## PXI Signal Generators (continued)

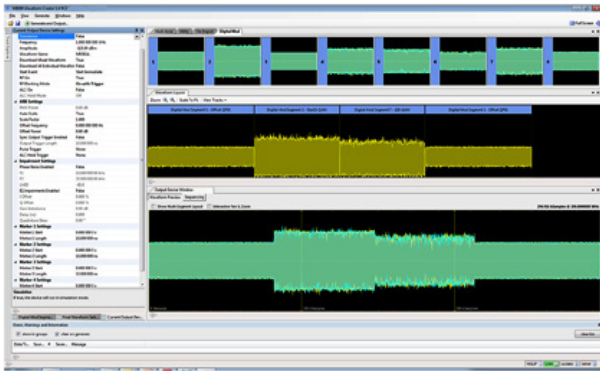

### Waveform Creator

The M9099 Waveform Creator is a software application focused on easy development of complex baseband and vector signals used in the validation and test of digital communications products. Built around a “drag and drop” graphical user interface, Waveform Creator allows quick development of multi-format, multi-track waveforms with waveform segments displaced in frequency and time. Its modularity supports multiple waveform types and VSG/AWG instruments to be plugged in, supporting expansion to include both current and future waveform types and instruments.

Waveform Creator options:


- Digital modulation
- DOCSIS 3.1
- SystemVue
- File-based write

[www.keysight.com/find/m9099](http://www.keysight.com/find/m9099)



# Migrating from Legacy Signal Generators

- Carefully planned instrument migration and modernization can maximize your test-system efficiency, performance, and readiness, while minimizing risk and potential disruptions, keeping you at the leading edge in the competitive marketplace. The Keysight PSG and X-Series signal generators are designed as evolutionary replacements to their in-class predecessors. Take advantage of their performance, flexibility, speed, and modern connectivity in replacing legacy Keysight signal generators.

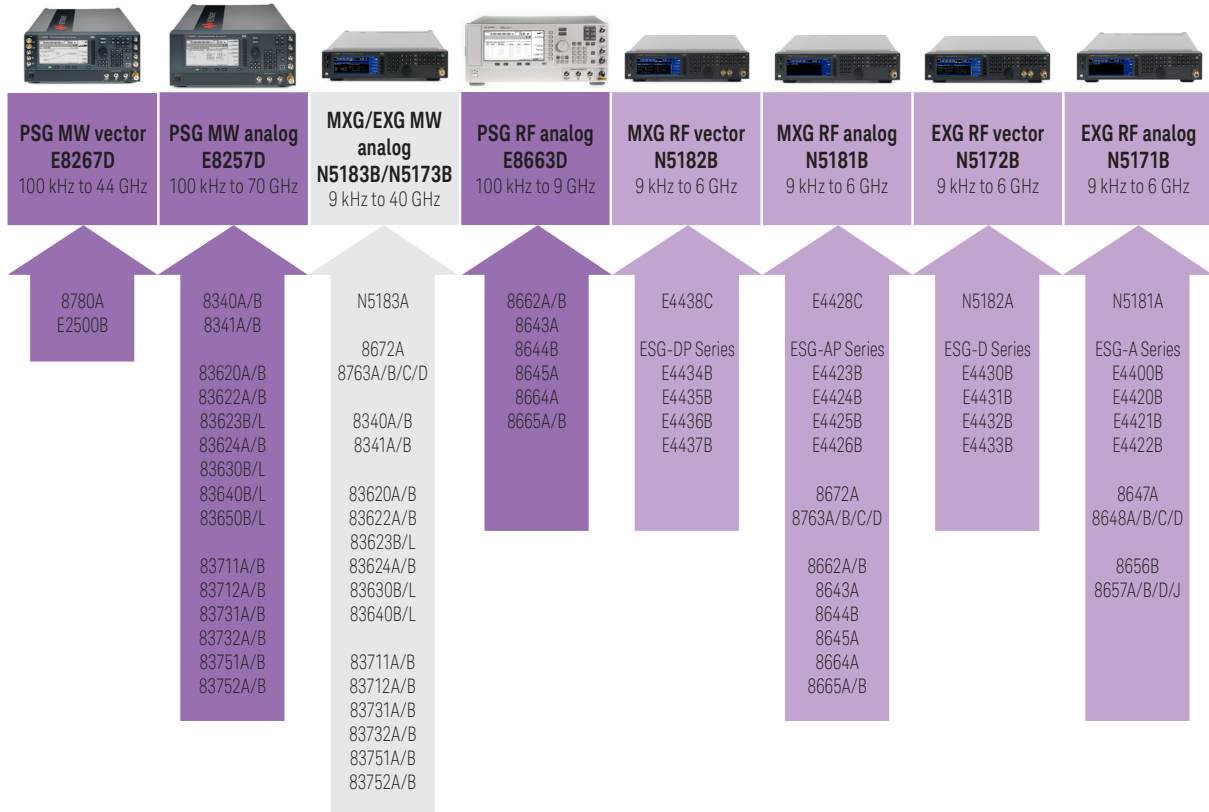

Migrate to the X-Series RF signal generators  
[www.keysight.com/find/X-Series\\_SG\\_Migration](http://www.keysight.com/find/X-Series_SG_Migration)

Migrate to microwave signal generators  
[www.keysight.com/find/Microwave\\_SigGen\\_Migration](http://www.keysight.com/find/Microwave_SigGen_Migration)

Convert test systems to modular solutions  
[www.keysight.com/find/pxi](http://www.keysight.com/find/pxi)

Learn more at: [www.keysight.com](http://www.keysight.com)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

