

Honeywell Relative Humidity/Temperature Recorder **TRANSCAT**

- Battery Operated
- Disposable Ink Cartridges
- 8" Circular Chart
- Ranges: 0–100% RH; 0–100°F

Read and Record Temperature and RH Directly


This two-pen instrument has 7-day rotation. It is direct reading and requires no conversion charts. The pens record measurements in the 0–100°F range and 0–100% RH range, with respective accuracies of $\pm 2\%$ and $\pm 3\%$ of span. The long-lasting pen assemblies can produce more than 1,000 feet of recorded trace on the chart.

The hygroscopic element is a preconditioned nylon unit which responds to a change in relative humidity by changing in length. A suitable linkage connects the element to the RH-recording pen.

This instrument is housed in a molded case with a door lock. The units are portable or can be wall or panel mounted.

Each Unit Includes: Box of 100 charts (for 8161A only) (7516A-W), set of pens (red and purple) (4850A/4849A), 1.5V alkaline C cell (4724E), mounting bracket and screws, keys, and instruction manual.

8161A

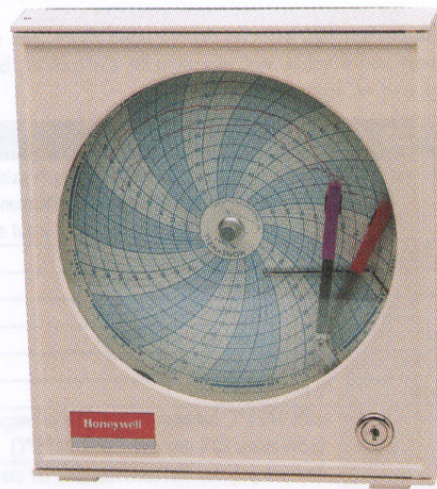

ORDERING INFORMATION

TK8161A	RH/Temperature Recorder, 7-Day
TK7516A-W	Charts, 7-Day (Box of 100)
TK4849A	Replacement Pens, Purple (Pk/6)
TK4850A	Replacement Pens, Red (Pk/6)
CTMP14	Transcat Certified Calibration

TRANSCAT®

 Visit us at Transcat.com!

35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001

TRANSCAT