


Pomona®

Model 6342
Precision Electronic Probe
W/Gold Spring Loaded Tip

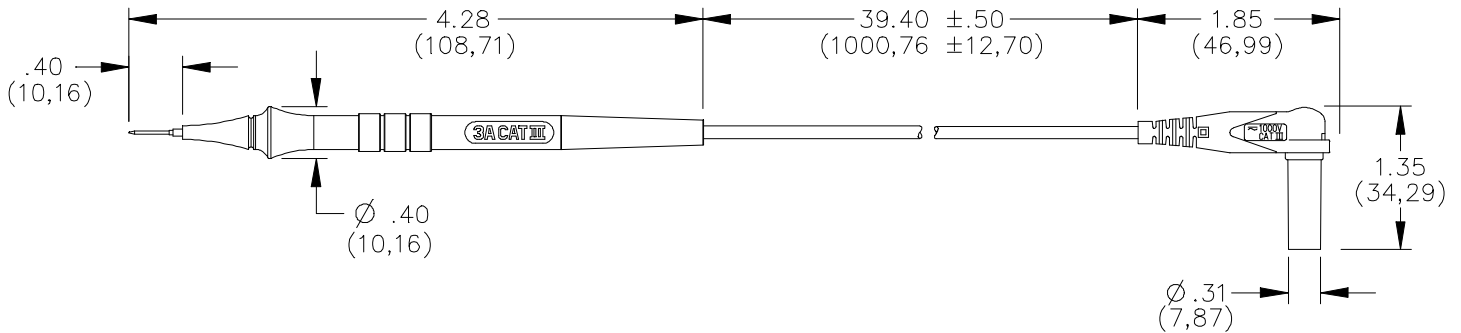

FEATURES:

- IEC 1010 compliant, CAT III, 1000 V, 3 Amperes
- Ideal for making measurements not easily accessible.
- Right angle sheathed banana plug for connection to hand held digital multimeters.

MATERIALS:

Probe Body: Outer Insulation - Santoprene® Rubber, Color: Gray
 Inner Insulation – Polypropylene, Fire Retardant

Right Angle Sheath Banana Plug:

Plug Body: Nickel plated brass.

Banana Plug Spring: Nickel plated Beryllium copper.

Insulation: Nylon 6 fire retardant, UL94 VO, or fire retardant polypropylene.

Wire: 24 AWG, stranding 45 x 40 tinned copper, silicon rubber .089 (2,26mm) O.D.

Color: See Ordering Information

Tips: Stainless steel, gold plated plunger.

RATINGS:

Operating Temperature: 55° C.

Operating Voltage: 1000 VRMS

Current: 3 Amperes

ORDERING INFORMATION: Model 6342

One Red probe, one Black probe with gold plated plunger tip steel .

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA